Evaluation: paired evolving-channel episodes

Sionna link-level simulation • 2 active UEs • 4 receive antennas • 16-QAM, MCS 14 • 132 PRBs

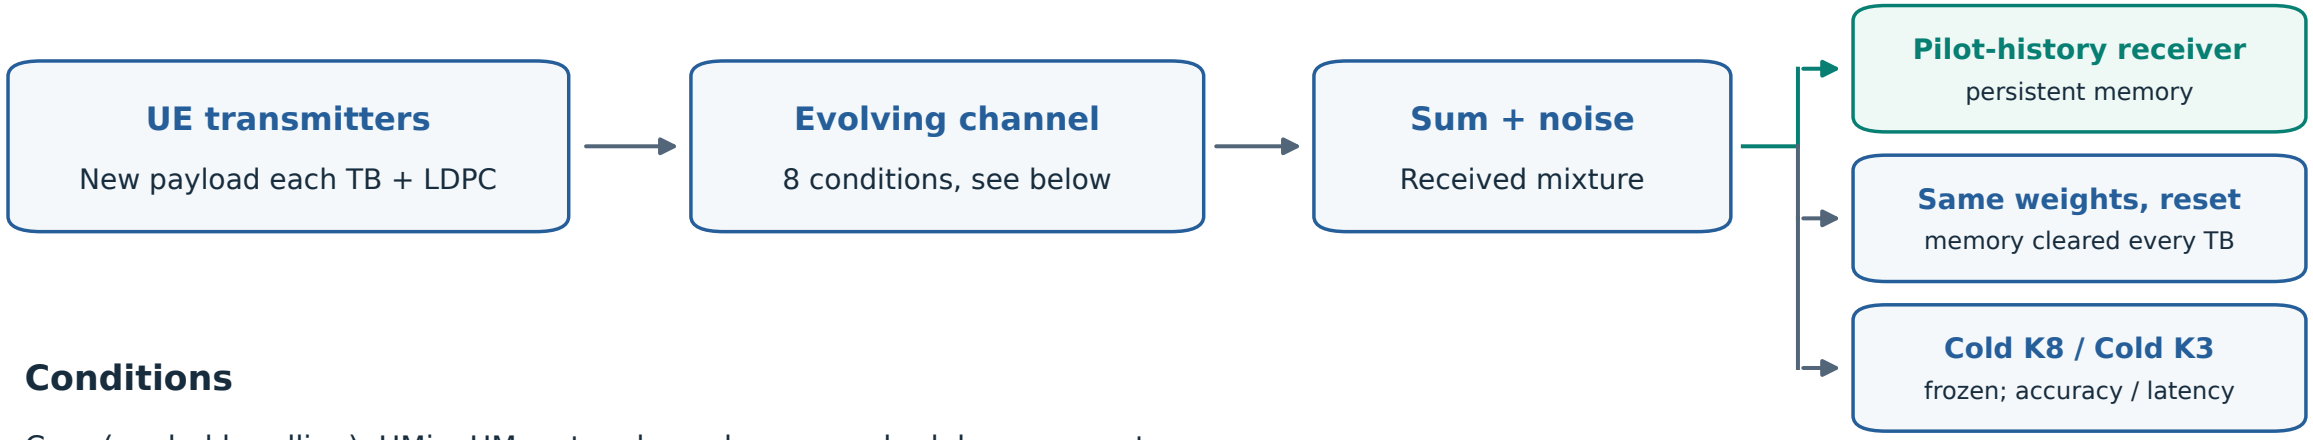

Conditions

Core (pooled headline): UMi • UMa • topology change • schedule-gap re-entry

Reported: TDL-B100 • TDL-C300 • close LoS • near-far

Same received observations for every receiver

Each of 32 episodes per condition

Development bank selects the checkpoint; an independent confirmation bank reports accuracy. Latency: p95, prepared LS grid to decoded payload.