UNIVERSITI TEKNOLOGI MARA
MARKING SCHEME

COURSE	:	COMPUTER ORGANIZATION AND ARCHITECTURE
COURSE CODE	:	CSC429
EXAMINATION	:	NOVEMBER 2026 (MOCK)
TIME	:	3 HOURS

MARKING SCHEME NOTES

1. This marking scheme accompanies the CSC429 mock paper (November 2026). All answers are computed deterministically. Worked answers are shown for data representation and assembly; descriptive marking points come from a fixed bank.

2. No placeholders are used; every slot has a worked or descriptive answer.

3. Part A = 10 questions (80 marks); Part B = 1 assembly question (20 marks); total = 100 marks.

4. Computed slots: 4; descriptive slots: 7; placeholders: 0. Questions and answers are for local study use only.

5. Fingerprint based on 20 unique CSC429 papers; output is deterministic for seed 8.

FOR MARKERS' USE ONLY

This marking scheme consists of 9 printed pages.

© Hak Cipta Universiti Teknologi MARA

PART A — MARKING SCHEME

Worked answers and marking points.

QUESTION A1 (5 marks)

Study Figure 1 and answer the following questions.

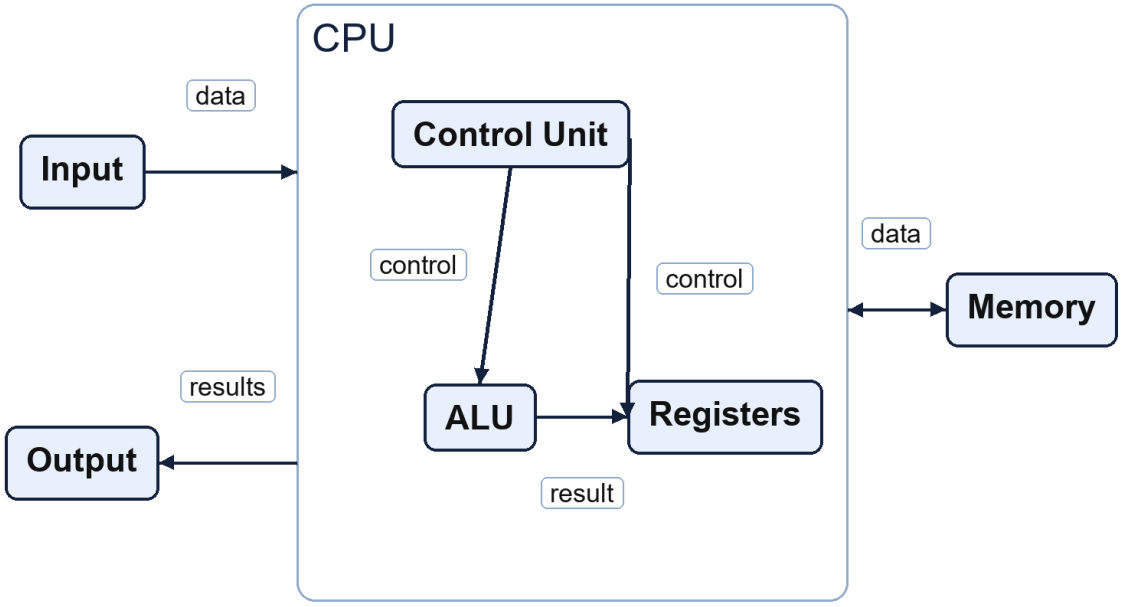


Figure 1: Stored-program computer organization.

(a) (2 marks) Name the computer organization shown in the figure and state its two key principles.

Answer: Von Neumann architecture. Instructions and data are stored in the same memory, and the CPU executes instructions sequentially unless a branch changes the control flow.

(b) (3 marks) Explain the function of the control unit and the arithmetic logic unit in this organization.

Answer: The control unit fetches and decodes instructions and generates the control signals. The ALU performs arithmetic and logical operations and records status flags.

QUESTION A2 (5 marks)

© Hak Cipta Universiti Teknologi MARA

The CPU contains a control unit and an arithmetic logic unit.

(a) (2 marks) Explain the function of the control unit.

Answer: It fetches and decodes instructions and generates control signals that coordinate the datapath and other components.

(b) (3 marks) Explain the function of the ALU.

Answer: It performs arithmetic and logical operations on operands and records status flags such as zero, carry, overflow and sign.

QUESTION A3 **(5 marks)**

Answer the following data-representation questions. Show your complete workflow.

(a) (2 marks) Represent -49 in 8-bit sign-magnitude form.

Answer: 10110001 (sign bit 1, magnitude 49).

(b) (3 marks) Represent -49 in 8-bit two's complement form.

Answer: 11001111.

QUESTION A4 **(5 marks)**

Answer the following data-representation questions. Show your complete workflow.

(a) (2 marks) Convert 59 to binary. Show your workflow.

Answer: 59 = 00111011_2.

(b) (3 marks) Convert 10110101_2 to decimal. Show your workflow.

Answer: $10110101_2 = 181_{10}$.

QUESTION A5 **(10 marks)**

Answer the following data-representation questions. Show your complete workflow.

(a) (2 marks) Convert 37 to binary.

Answer: 37 = 00100101_2.

(b) (2 marks) Convert 00110011_2 to hexadecimal.

Answer: $00110011_2 = 33_{16}$.

© Hak Cipta Universiti Teknologi MARA

(c) (3 marks) Convert $4F_{16}$ to octal.

Answer: $4F_{16} = 117_8$.

(d) (3 marks) Convert 337_8 to decimal.

Answer: $337_8 = 223_{10}$.

QUESTION A6 **(10 marks)**

Study Figure 2 and answer the following questions.

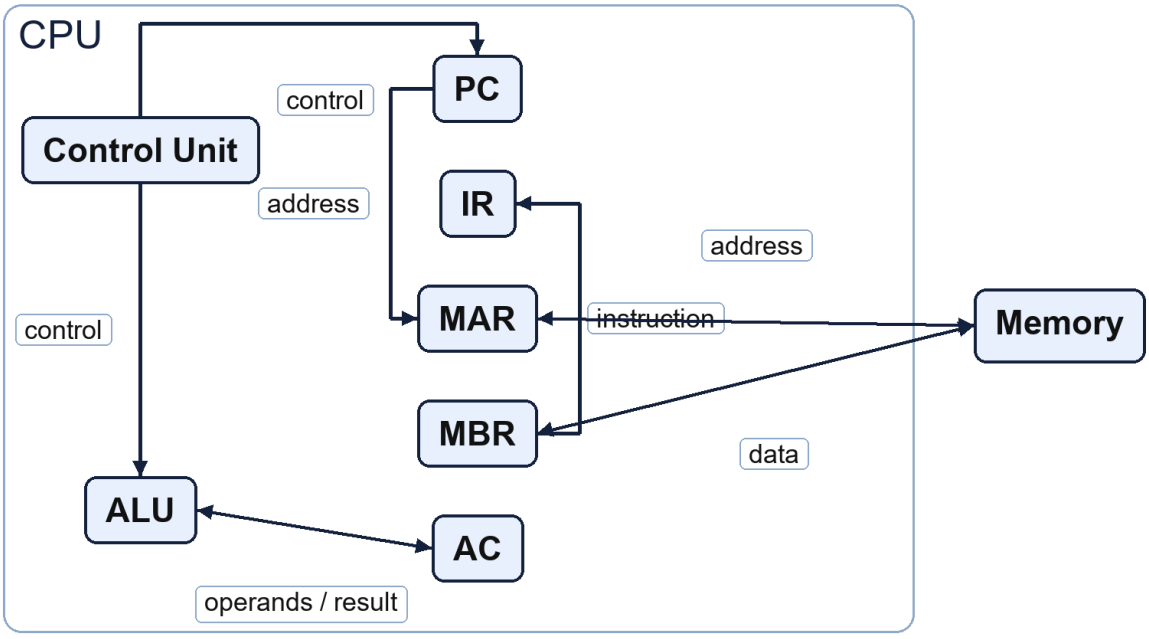


Figure 2: CPU, memory and system bus organization.

(a) (2 marks) Identify the register that holds the address of the next instruction and the register that holds the instruction currently being decoded.

Answer: PC holds the address of the next instruction; IR holds the instruction currently being decoded.

(b) (3 marks) Explain the roles of MAR and MBR during a memory read.

Answer: The MAR holds the address to be accessed. The memory places the selected word in the MBR, which then supplies it to the CPU (for example, to the IR).

(c) (5 marks) Describe the fetch-decode-execute cycle using the components shown in the


© Hak Cipta Universiti Teknologi MARA

figure.

Answer: Fetch: PC -> MAR; memory read; MBR -> IR; PC is incremented. Decode: the CU interprets the opcode in IR and issues control signals. Execute: operands are read, the ALU performs the operation, the result and flags are written back, and the next instruction is fetched.

QUESTION A7 **(10 marks)**

Study Figure 3 and answer the following questions.

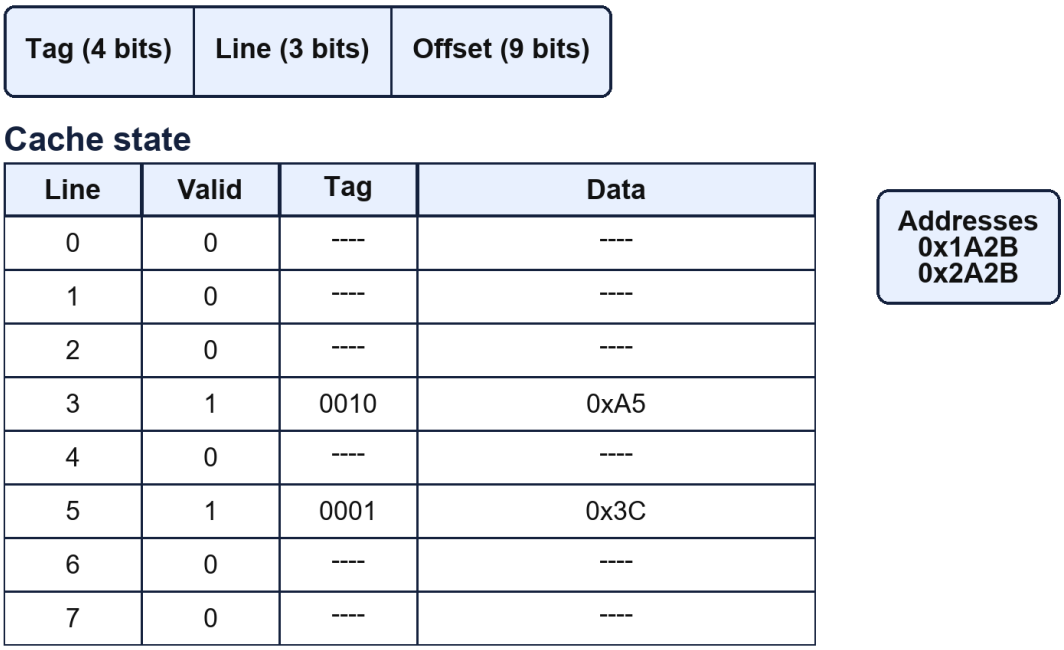

Line	Valid	Tag	Data
0	0	----	----
1	0	----	----
2	0	----	----
3	1	0010	0xA5
4	0	----	----
5	1	0001	0x3C
6	0	----	----
7	0	----	----

Figure 3: Direct-mapped cache organization and address fields.

(a) (2 marks) The cache uses a 16-bit address split into a 4-bit tag, a 3-bit line number and a 9-bit offset. For address 0x1A2B, give the tag, line number and offset in binary.

Answer: 0x1A2B = 0001 1010 0010 1011; tag = 0001, line = 101, offset = 000101011.

(b) (4 marks) Using the cache state shown in the figure, determine whether each address is a hit or a miss: (i) 0x1A2B, (ii) 0x2A2B. Explain your reasoning.

Answer: (i) Hit: tag 0001 and line 101; line 5 is valid with tag 0001. (ii) Miss: tag 0010 and line 101; line 5 is valid but its tag is 0001, so the tags do not match.

(c) (4 marks) Explain why the cache compares tags and how temporal and spatial locality

© Hak Cipta Universiti Teknologi MARA

improve the hit rate.

Answer: The tag identifies which memory block occupies a line; comparing tags prevents returning data from a different block. Temporal locality means recently used data is likely reused, and spatial locality means nearby addresses are likely used, so keeping blocks in cache raises the hit rate.

QUESTION A8 **(10 marks)**

Interrupts can be maskable or non-maskable.

(a) (3 marks) Differentiate maskable and non-maskable interrupts.

Answer: Maskable interrupts can be disabled/delayed by the CPU; non-maskable interrupts cannot be ignored and are used for critical events.

(b) (3 marks) Explain what an interrupt handler (ISR) does.

Answer: It saves context, identifies the device/cause, services the request, clears the interrupt and restores context.

(c) (4 marks) Describe TWO methods for handling multiple interrupts.

Answer: Priority-based nesting and polling/sequential service; nested interrupts allow a higher-priority request to pre-empt a lower-priority ISR.

QUESTION A9 **(10 marks)**

Multiple interrupts can arrive while the CPU is servicing another interrupt.

(a) (3 marks) Explain nested interrupts.

Answer: A higher-priority interrupt can interrupt a lower-priority ISR; the CPU saves the lower ISR context and services the higher-priority one first.

(b) (3 marks) Describe how interrupt priority determines the order of service.

Answer: The interrupt controller compares priorities and presents the highest-priority pending request to the CPU first.

(c) (4 marks) Explain the sequence of events when a higher-priority interrupt arrives during an ISR.

Answer: The CPU finishes the current instruction, saves the current context, acknowledges the higher-priority interrupt and jumps to its ISR; the lower ISR resumes after the higher one returns.

© Hak Cipta Universiti Teknologi MARA

QUESTION A10 **(10 marks)**

Multicore processors are common in modern computers.

(a) (2 marks) Define multicore processing.

Answer: A single processor package contains multiple independent cores that can execute instructions concurrently.

(b) (4 marks) Explain TWO benefits of multicore processing.

Answer: Higher throughput on parallel workloads and better performance per watt; it can also improve responsiveness by running tasks concurrently.

(c) (4 marks) Describe NUMA and ONE challenge in a distributed-memory system.

Answer: NUMA: memory access time depends on which node owns the data. Challenge: inter-node communication/synchronisation overhead and programming complexity.

© Hak Cipta Universiti Teknologi MARA

PART B — MARKING SCHEME

Worked answers and marking points.

QUESTION B1 **(20 marks)**

Write appropriate programs using zero-, one- and three-address instructions to compute Z = (A + B) * (C - D) / E. Registers A, B, C, D and E must not be modified; X, Y and Z are temporary registers; the final answer must be stored in Z. Available instructions: zero-address PUSH, POP, ADD, SUB, MUL, DIV; one-address LOAD, STORE, ADD, SUB, MUL, DIV; three-address ADD, SUB, MUL, DIV.

(a) (6 marks) Write a zero-address program for the expression.

Answer:

```
PUSH A
PUSH B
ADD
PUSH C
PUSH D
SUB
MUL
PUSH E
DIV
POP Z
```

(b) (6 marks) Write a one-address program for the expression.

Answer:

```
LOAD A
ADD B
STORE X
LOAD C
SUB D
STORE Y
LOAD X
MUL Y
STORE X
LOAD X
DIV E
STORE Z
```

© Hak Cipta Universiti Teknologi MARA

(c) (8 marks) Write a three-address program for the expression.

Answer:

```
ADD X, A, B
SUB Y, C, D
MUL X, X, Y
DIV Z, X, E
```

© Hak Cipta Universiti Teknologi MARA