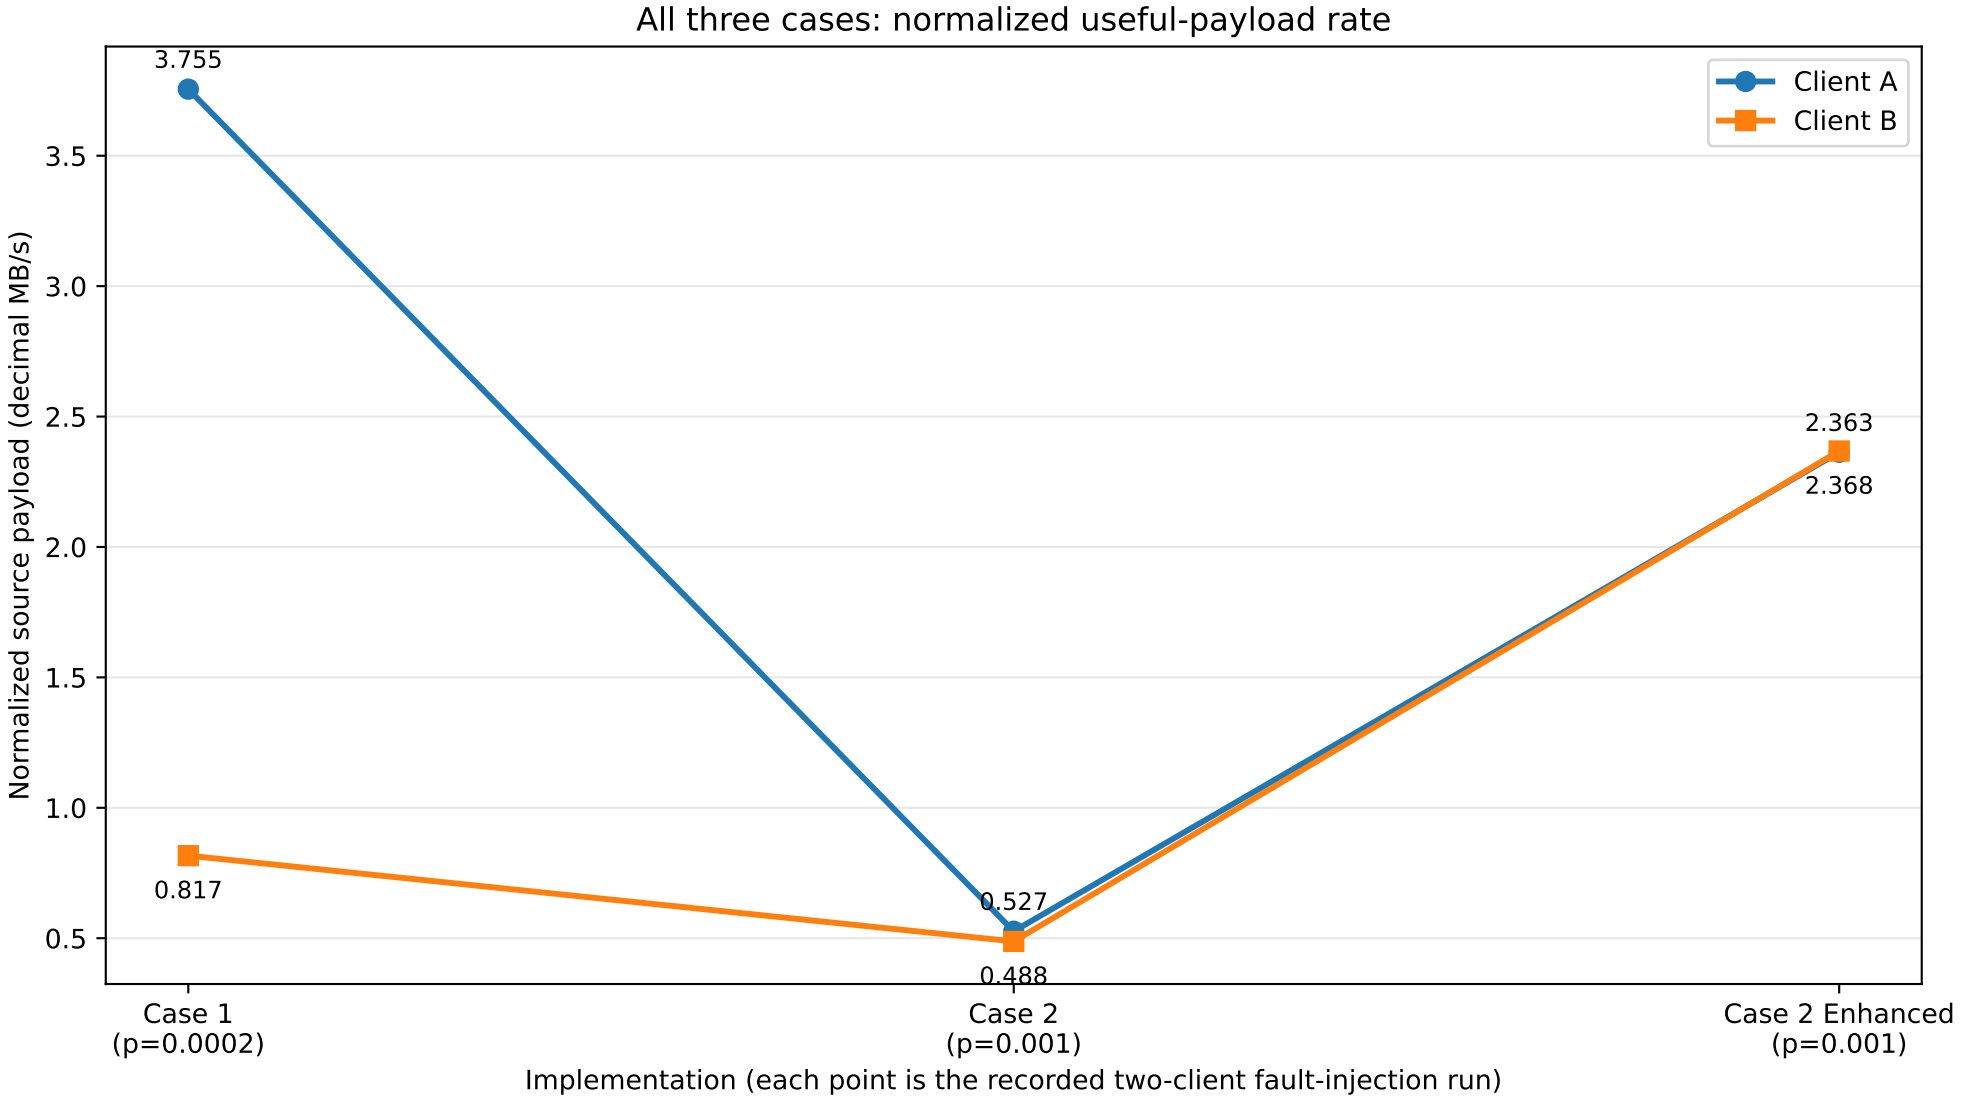
All three cases: normalized useful-payload rate
Client A
Client B
Normalized source payload (decimal MB/s)
3.5
3.0
2.5
2.0
1.5
1.0
0.5
3.755
0.817
0.527
0.488
2.363
2.368
Case 1
(p=0.0002)
Case 2
(p=0.001)
Case 2 Enhanced
(p=0.001)
Implementation (each point is the recorded two-client fault-injection run)