


BTT SKR V1.4 PIN

WWW.BIGTREE-TECH.COM

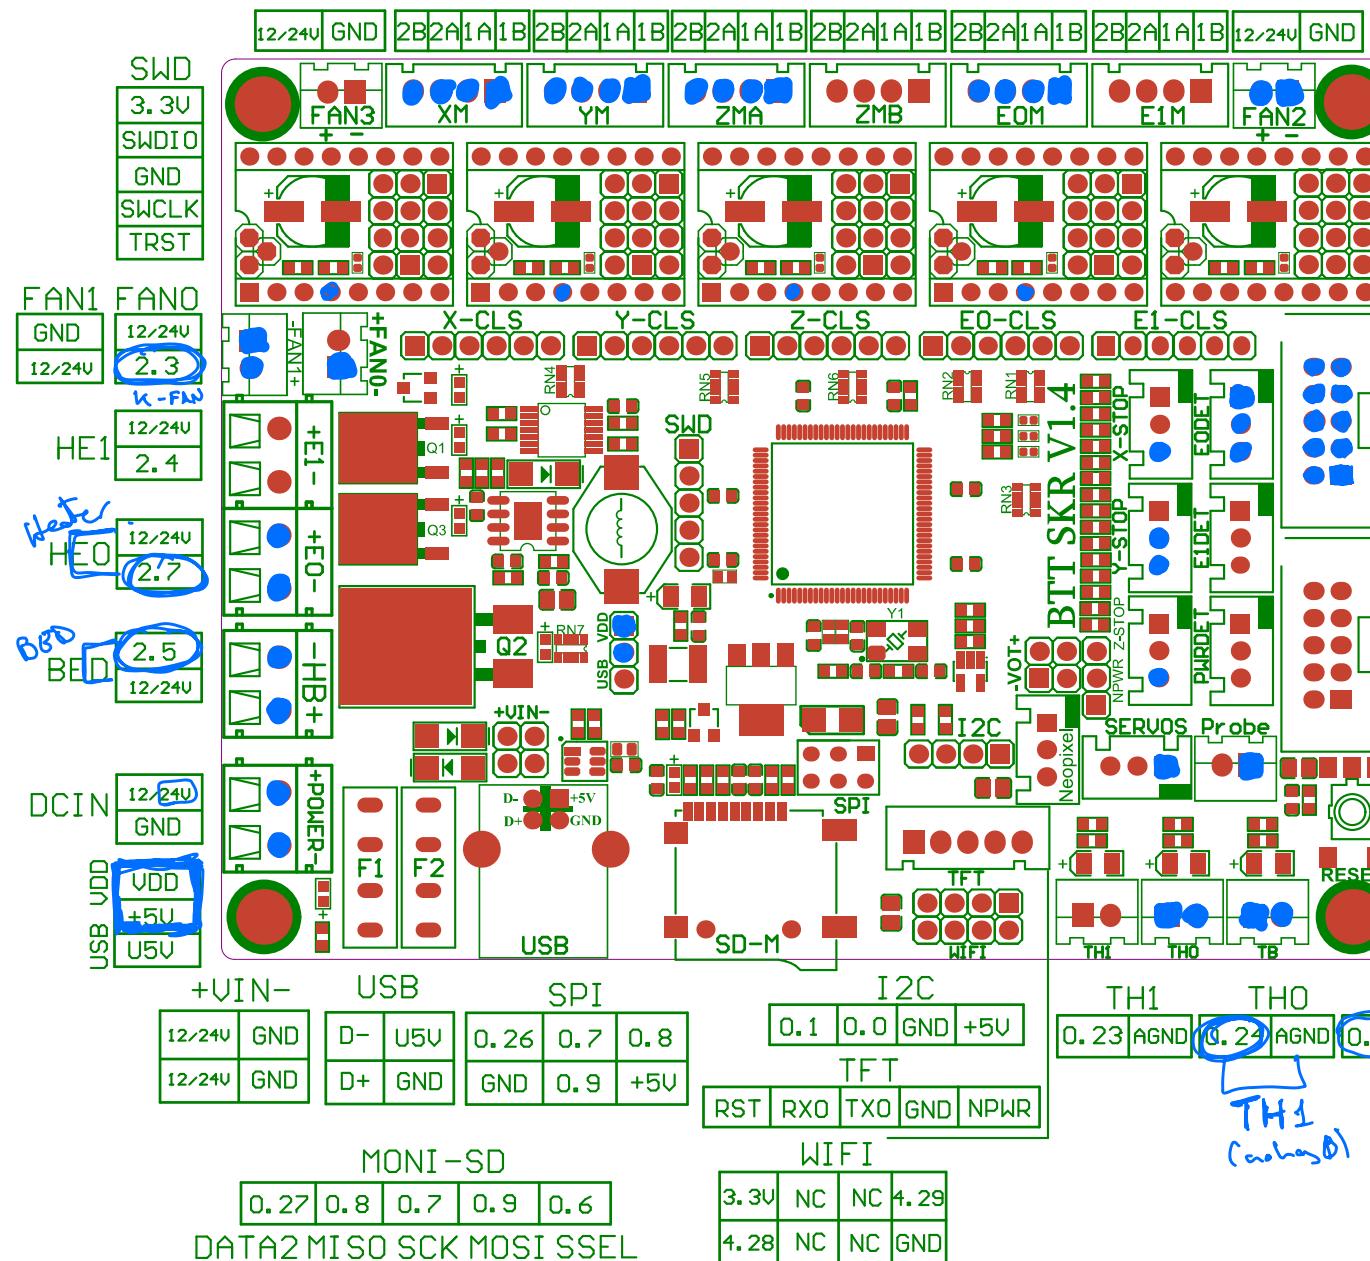

	EN	STEP	DIR	XUART	XCS	YCS	ZCS	EOCS	E1CS
2.1	2.2	2.6	X	UART	1.10	1.9	1.8	1.4	1.1
2.8	0.19	0.20	Y	SPI	0.5	MISO			
0.21	0.22	2.11	Z		1.17	MOSI			
2.12	2.13	0.11	EO		0.4	SCK			
1.16	1.15	1.14	E1						

	+5V	+5V			NC	GND		
Z-STOP	+5V	+5V			RESET	1.31		
Y-STOP	GND	GND			0.18	3.25	EXP2	touch screen
X-STOP	1.29	1.26	EODET		0.16	3.26		
	+5V	+5V			0.15	0.17		
	GND	GND	PWRDET		+5V	GND		
	1.28	1.25	E1DET		1.23	1.22		
	+5V	+5V			1.21	1.20	EXP1	
	GND	GND			1.19	1.18		
	1.27	1.0			0.28	1.30		

	-VOUT+	5VOT	NPWR					
-VOUT+	GND	5VOT	NPWR					
	GND	5VOT	5VOT					
			NPWR					
			+5V					

	NPWR						
Neopixel	NPWR						
	1.24						
	GND						

	SERVOS		Probe	
	GND	NPWR	2.0	GND
				0.10