

RF Admittance level switch Ceramic Insulation

For Solid Application, Model: RFLS-300HD



PRODUCT DESCRIPTION:

The RFLS-300HD RF Admittance type level switch is a simple, low cost, rugged point Level Switch designed for Level detection of Bulk materials in a bins or silo. This level switch can be used for detecting high, low level or for differential level detection and is used in various level detection applications like. cement industries, material handling plants, chemical industry, power utilities industry, food industry, pulp/paper industry, pharmaceuticals industry, water/ treatment plants, foundry industry etc. The specialty of the probe is that it tends to ignore the build- up on the probe, thus making it suitable for application, which tends to stick on the probe. The unit shown above is integral Type Rod Probe along with time delay feature, LED indication, fail safe mode etc. Unit Shown Below is Remote type Rod Probe along with time delay feature, LED indication, fail safe mode etc.

SALIENT FEATURES:


- Ceramic Insulated Electrode – Suitable for high-temperature applications above 150°C.
- High-Temperature Probe Construction – Designed for continuous operation under demanding process conditions.
- Heavy-Duty Probe Construction – Robust construction for harsh industrial applications.
- Sturdy Electrode – Designed to withstand impact due to accidental clinker formation and material impact.
- Wide Range of Applications – Suitable for various industrial level switching applications.
- No Moving Parts – No mechanical wear and tear, ensuring long service life and minimum maintenance.
- Adjustable Sensitivity – Field-adjustable sensitivity for reliable level detection.
- Adjustable ON/OFF Time Delay – Helps avoid unwanted switching caused by process disturbances.
- Fail-Safe High / Low Selection – Field-configurable fail-safe operation according to process requirements.
- Weatherproof / Flameproof Enclosure – Available as per application requirement.
- Integral / Remote Electronics – Available to suit different installation requirements.
- Suitable for High-Temperature Solids Applications – Ideal for applications involving hot powders, granules, clinker and other bulk solids.



RF Admittance level switch Ceramic Insulation For Solid Application, Model: RFLS-300HD



PROBE CONSTRUCTION SUITABLE FOR MATERIAL BUILD-UP:

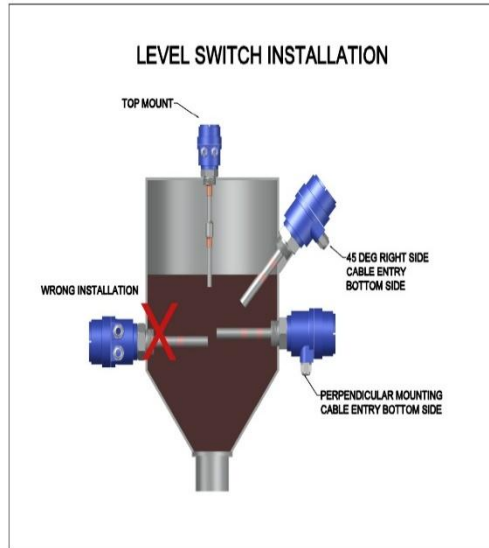

The RFLS-300HD is specially designed with a heavy-duty ceramic insulated probe for applications where material build-up, coating, or clinker formation may occur on the sensing electrode. The robust probe construction provides excellent mechanical strength and stable sensing performance under demanding process conditions. Ceramic insulation is suitable for high-temperature applications from 150°C to 650°C, making the probe suitable for hot and harsh industrial processes. The probe design helps maintain reliable level

detection even when material accumulates around the sensing area, reducing false level signals and improving overall operational reliability.

Components of Compact Level switch
Are explained in figure

Integral Type




Remote Type




Remote Probe/Controller /RF Cable

ELECTRICAL CONNECTION
Universal /230 VAC/110VAC/24 VDC

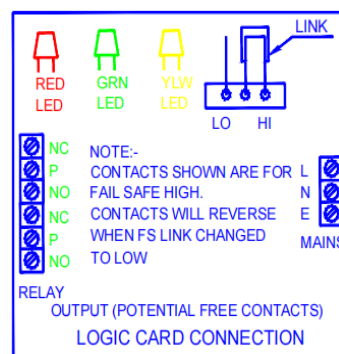

Controller Card

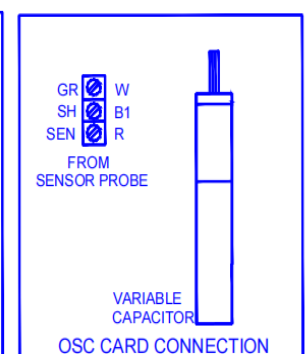

Oscillator Card

RF Admittance level switch Ceramic Insulation

For Solid Application, Model: RFLS-300HD

+

DATASHEET

RFLS-300 – RF Admittance Level Switch
Selection / Ordering Information


Selection	Code	Description
Model No.	RFLS-300	RF Admittance Level Switch
Probe Type	HD	Heavy Duty type Probe
Mounting Type	IN/RE	Integral / Remote
Insulation	FP/PT/ CE	Ceramic
Probe Diameter	D2	Heavy Duty 30mm
Probe Material	04 /4L/ 16/ 6L/MS/ SM	SS304/SS304L / SS316/ SS316L /Mild steel/ Special material
Power Supply	AC/DC/A1/UN	230VAC / 24VDC / 110VAC / Universal
Output	DP/SP/PN	DPDT Relay /SPDT Relay / PNP Relay
Switching Delay	ND / DA	No Delay / Adjustable 3 Sec to 20 Sec
Indication	L	LED
Enclosure	WP / FL	Weatherproof / Flameproof
Connection	T	Threaded
	F	Flanged
Mounting	B1 / B2 / B3/B4	1" / 1½" / 2" BSP/ Special Mounting
	N1 / N2 / N3/N4	1" / 1½" / 2" NPT/ Special Mounting
Flange Rating	A1 / A3 / A6	ANSI 150# / ANSI 300# /ANSI 600#
Flange Facing	RF / FF	Raised Face / Flat Face
MOC-Process Connection	S4 / S6/ S16/MS/SL	SS304 / SS316 /SS316L /Mild steel / Special material
Flange Size	01 / 15 / 02 / 03 / 04/PS	1" / 1½" / 2" / 3" / 4"/ Special Process
Pressure	P1 /P2/P3/P4	Standard 0 to 2KG/ 2 To 10kg /10kg to 40kg / Customized
Temperature	T1/ T2/T3/T4/TS	Max -20–150°C / 200°C/ 350°C / 650°C / Customer Specified Special Designed
High Temperature stand off	H8/H1/H2/H3/HS	80MM/150 MM /200MM /300 MM /Special standoff Extension

RF Admittance level switch Ceramic Insulation

For Solid Application, Model: RFLS-300HD


Selection	Code	Description
Remote Cable	05 / 10 / 15 / 20 / 25 / 30/SR	5 / 10 / 15 / 20 / 25 / 30 m/ Special Customer Requirement
Cable Gland	G1/ G2 / G3/ G4	PG13.5 / ½"NPT / ¾" ET/ PG16
Ground / Reference	GS / GX	Standard / Special
Material Certificate	M0 / MC	Not Required / Material test certificate
Test Certificate	TC / CC	Test Certificate / Calibration Certificate
Documentation	DS / GA / IR	Datasheet / GA / Inspection Report
Tagging	TAG	Customer Tag No.
Probe Length	XXXX	200 mm to Customized

Mechanical Drawing Integral Type:

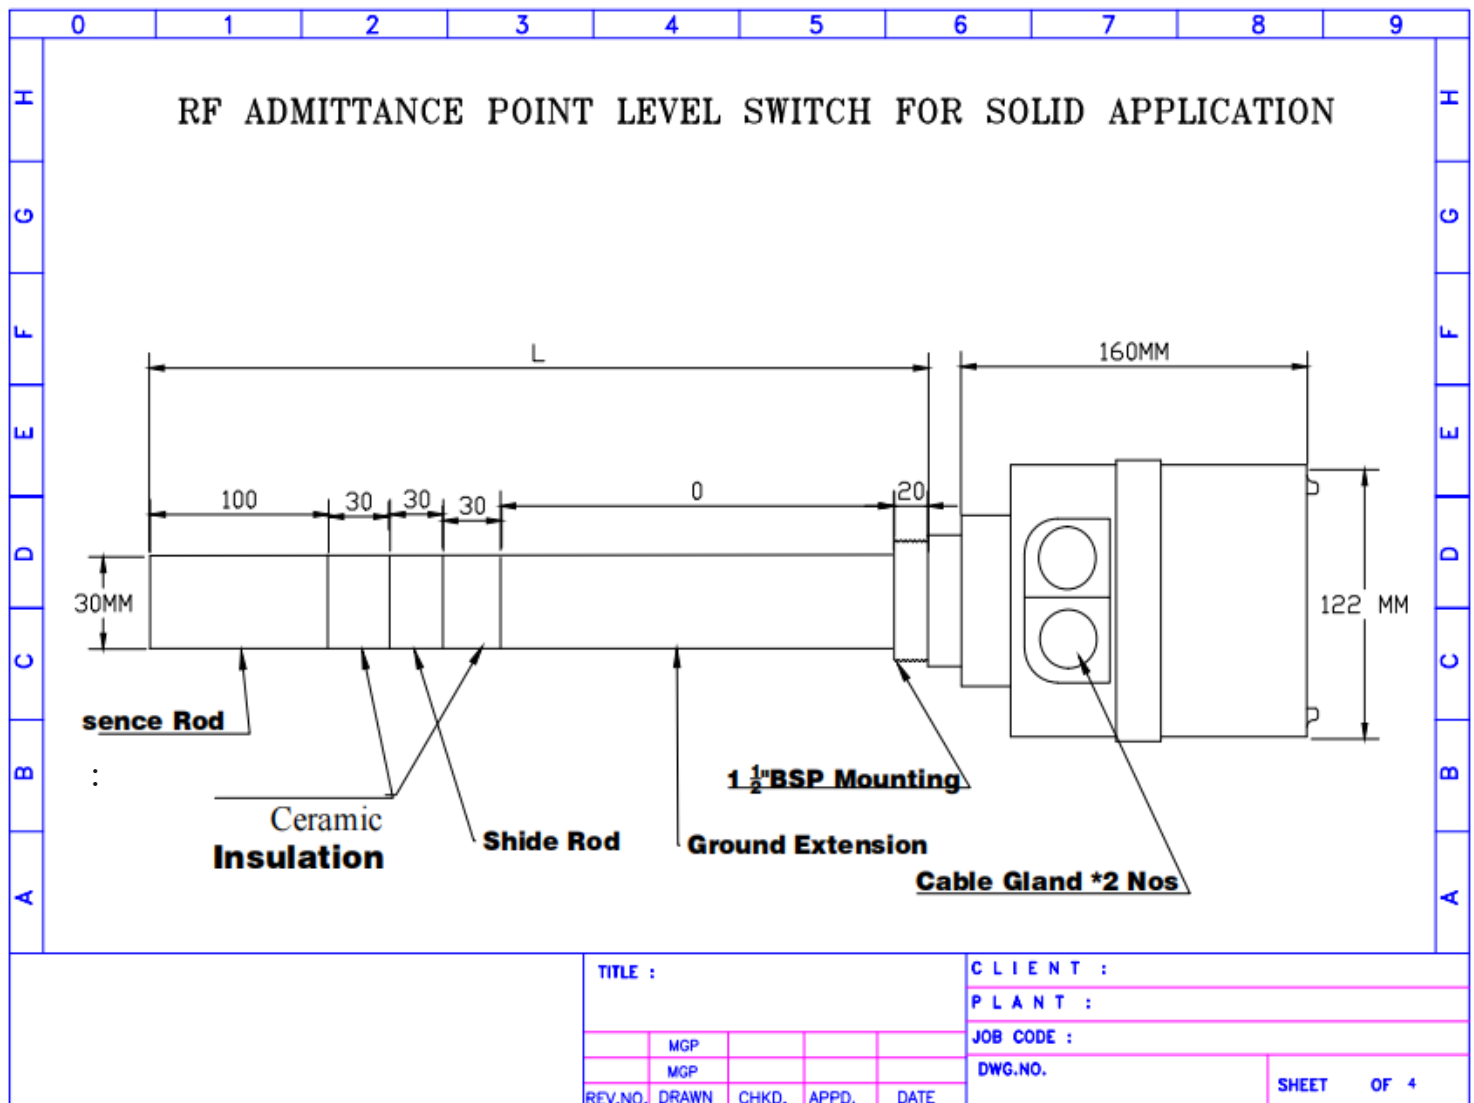

RF Admittance level switch Ceramic Insulation For Solid Application, Model: RFLS-300HD

Mechanical Drawing Remote Type:

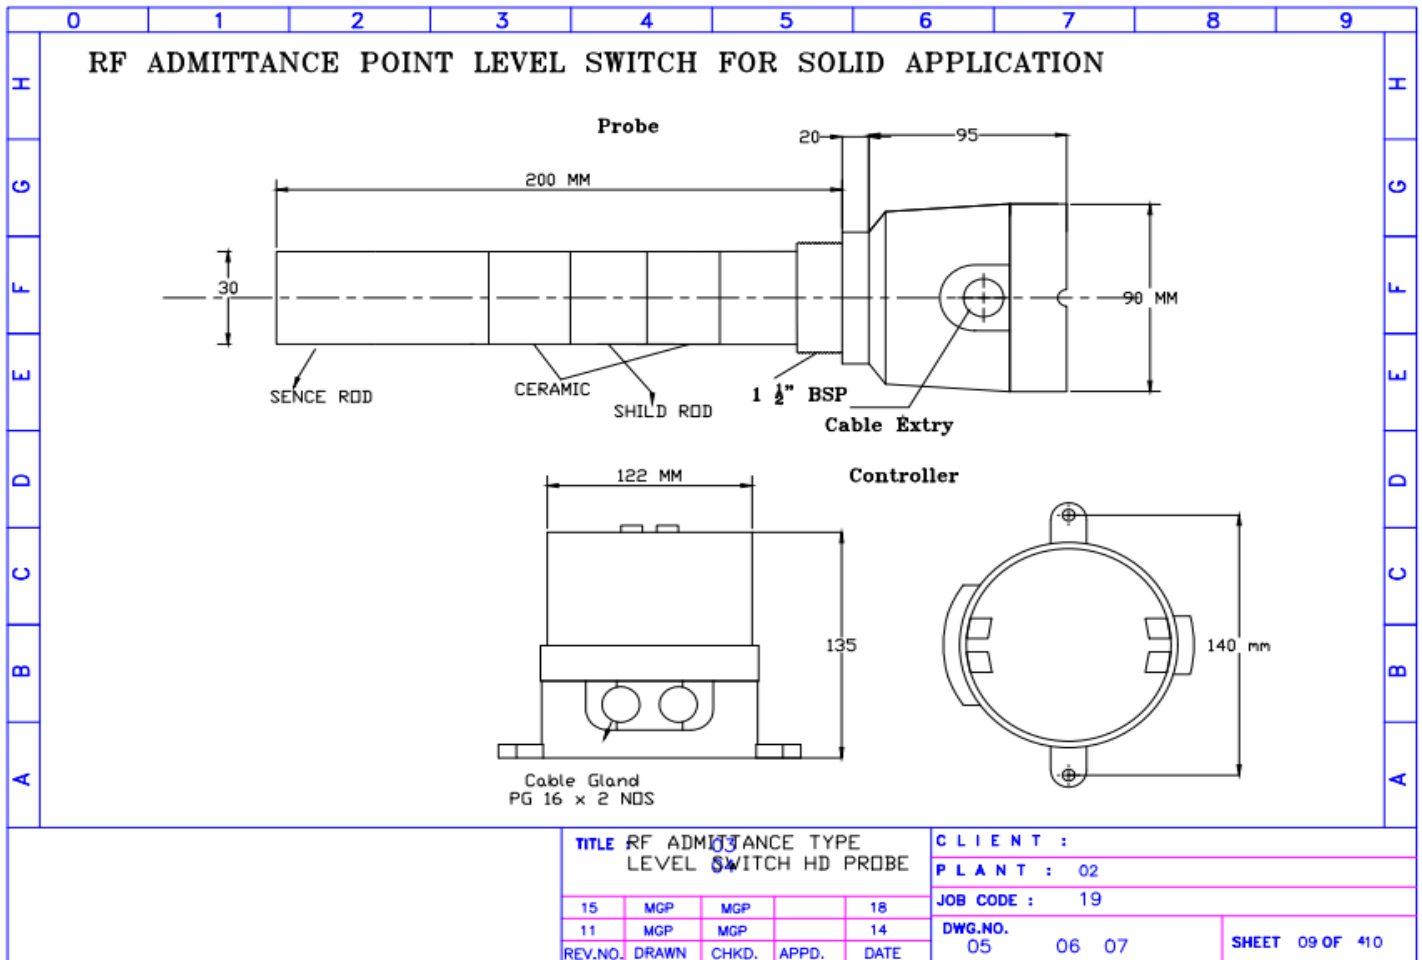

Technical Specifications:

Before to Order, please confirm below Details,

- Process Parameters: Temperature, pressure,
- atmosphere: hazardous /non-hazardous.
- Application media, characteristics: Sp. Gr., Dielectric constant, hazardous or not, corrosiveness, viscosity.

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune
411023, Contact: +91 9579430012/+91 9730042725,



E-mail: sales@levtron.in www.Levtron.in/
www.Levtroninstruments.com/ www.levelsence.in