

Compact Vibrating Rod Level switch For Solid Application

Model: VFLS-500S



LEVTRON
SENSING INSTRUMENTS



The Vibrating Rod Level Switch is an economical choice in level detection of powders and bulk solids. The Vibrating Rod Level Switch built with a piezoelectric crystal that vibrates the rod at a natural frequency. Once the rod comes in contact with the material, the vibration will be damped and the switch will change its state. Once the rod is uncovered by the material, the switch will revert to its normal state. Best for silo or hopper applications, its

probe design allows for self-cleaning, ensuring no build-up or bridging of material and accurate detection. Sensitivity is adjustable for detection ranging from large granular material to small powders with low bulk densities. The failsafe mode can be set for failure on high level or failure on low level using a selector switch in instrument.

Applications:

Flakes, Grains, Coal Powder, cereals, sugar, animal feed, milk powder, flour, insulation, cement, plastic granules, saw dust, wood chips carbon black, light fibers, detergent powders, dyes, chalk, silica,

Salient Features:

- Compact size with integral electronics
- No calibration required, so plug and play
- No moving parts so no wear and tear
- Universal Power supply for AC / DC operation
- Relay or open collector PNP outputs available in Options

Compact Vibrating Rod Level Switch For Solid Application Model:

- Rigid and sturdy design @ 250 mm
- Available in 1&1/2 inch and above screwed mounting standards
- IP 68 ingress protection
- Field Selectable fail-safe mode
- LED indicators for status, alarm and normal operation
- Selectable Density setting and switching delay

Model: VFLS-400S

Make: Levtron Instruments Pvt Ltd. Pune

Technical Specifications

Mechanical

Housing: Cast Aluminum IP 68

TYPE: Integral with probe with Electronics

Cable Entry: PG 13.5/PG 16

Cable Gland: Single compression PG13.5/PG 16

Mounting: 1 1/2" BSP standard.

Mounting Pipe extension M.O.C.: MS/SS304 ISS316 as per requirement

Tuning Fork: S316/SS304 Electronics:

Power supply: 24 V DC OR 230 V AC SPECIFY.

Power consumption: 3 VA Max.

Out Put: SPDT/DPDT Relay

Relay output: Potential. free change over contacts rated at 6A 230 V AC 50 Hz

Resonant frequency of fork: 350 Hz approx. for 100 mm fork

Switching delay: Adjustable up to 20 sec. for fork covered or uncovered condition


Failsafe condition: High / Low field selectable.

Sensitivity: Field selectable for Low and High density material

Indication: By LEDs, Yellow for status, Blue for Normal, and Red for Alarm

Compact Vibrating Rod Level Switch For Solid Application Model:

Mechanical Drawing:

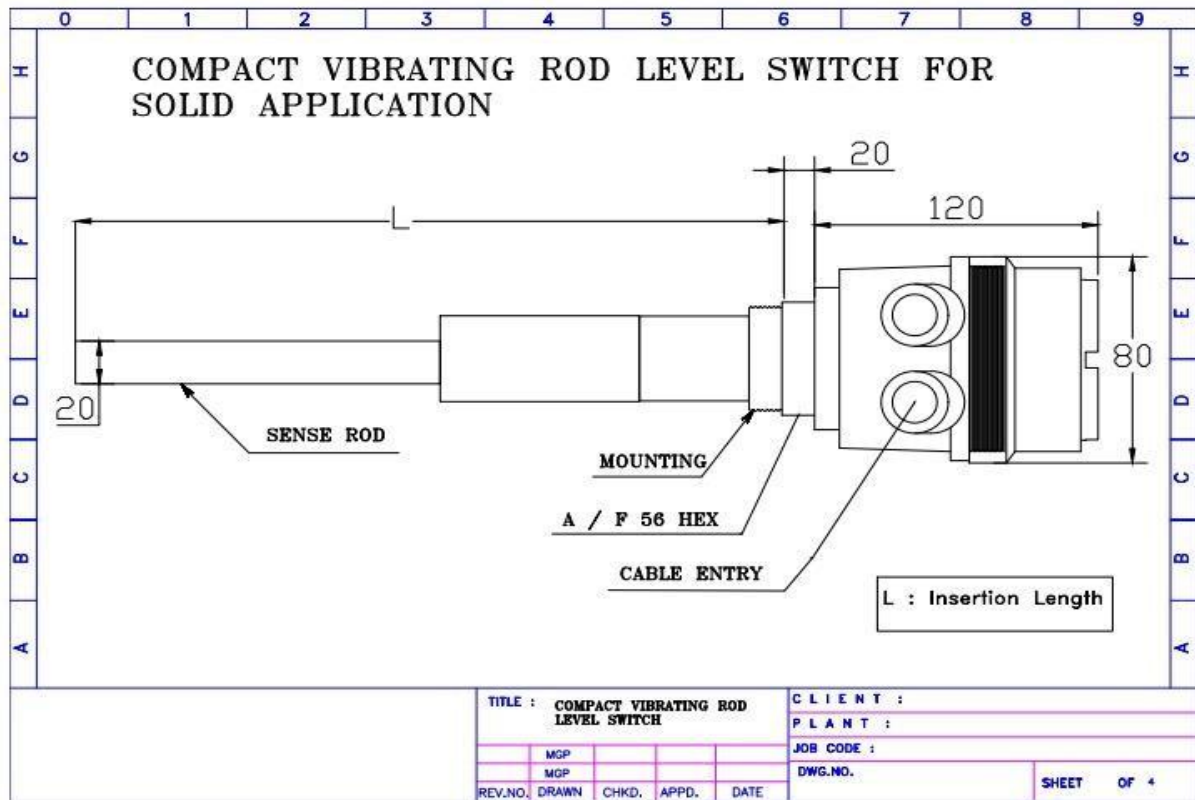

INFORMATION REQUIRED Before Purchase

- Process Parameters: Process Connection, Process Temperature, Vessel pressure if any.
- Application media characteristics: Density, Viscosity, Sp. Gr.
- Supply Voltage, Probe length, Mounting etc.

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023, **Contact: 09579430012 / 9730042725**

E-mail: sales@levtron.in Website : www.Levtron.in