

Compact Vibrating Fork Level Switch

For Liquid Applications

Model: VFLS-700L



Compact Vibrating Fork Type Liquid level switch is a simple, low cost, rugged point Level Switch designed for Level detection of liquids in a tank or vessel. This level switch can be used for detecting high, mid or low or for both level detection. Used in oil industries, Paint Industries, food processing plants, beverages, chemical industry, pulp/paper industry, pharmaceuticals industry etc.

The unit has integral electronics along with sensitivity adjustment and time delay feature, LED indication, fail safe logic etc.

Probe Construction suitable for Liquid applications:

Basically, the Liquid Vibrating fork type instruments are used for Level detection in Resins, water, oil, acids, chemicals etc. when the media/ liquid level reaches up to the Vibrating fork/ probe,

The vibrations of the fork are damped because of the liquid in contact, and sensing signal reached to connected electronics circuitry and generates a switching signal to relay circuit integrated with timer functions. The fork vibrates at vibrating frequency of 350 Hz (± 10 Hz)

SALIENT FEATURES

- Wide range of application
- Easy installation and maintenance.
- Weatherproof/Flameproof enclosure as per requirement
- SS 316 Vibrating Fork to withstand in harsh environments.
- Adjustable differential time delay with ON/OFF timing.
- Fail Safe High/Low Selection Feature (Field configurable)
- Sensitivity adjustments as per application media.

M/S. Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane.Pune411023,

Contact:09579430012/9730042725, E-mail:sales@levtron.in,Web:www.Levtron.in

Compact Vibrating Fork Level Switch

For Liquid Applications

Model: VFLS-700L

Model: VFLS-700L

Make: Levtron Instruments Pvt Ltd. Pune

Technical Specifications

SUPPLY VOLTAGE	230VAC or 110VAC or 24V DC (factory selectable)
OUTPUT TYPE	1 x DPDT Relay
CONTACT RATING	05 AMPS at 230VAC /24VDC,
CABLE ENTRY	2 X PG 16, (others, Specify)
TEMPERATURE	0-100°C for integral type.
PROBE	0-160°C for Integral with Standoff, type 0-160°C for Remote with Standoff, type
MATERIAL Insulation	Type: Standard Probe.
	Probe Length: 150 MM or as per requirement, specify. Housing: Cast Aluminum Weatherproof
MOUNTING	Sensing Fork: SS316, Flange/Adapter: SS316/SS304/C. S
	PTFE coating
FREQUENCY	Std: 1" BSP (M) threaded OR Flanged process connection as per requirement on request.
TIME DELAY	weatherproof as per IP 68 Flameproof (optional)
FAIL SAFE	350 Hz (+/- 10%)
	0 To 20 seconds adjustable with ON/OFF delay Selection
	Field Selectable.

INFORMATION REQUIRED Before Purchase

- Process Parameters: Process Connection, Process Temperature, Vessel pressure if any. Application, characteristics: Density, Viscosity, Sp. Gr.
- Supply Voltage, Probe length, Mounting etc.

M/S. Levtron Instruments Pvt Ltd.


r, plot no 6, Pandhari Industrial estate, Shivane.Pune411023,
30012/9730042725, E-mail:sales@levtron.in,Web:www.Levtron.in

Compact Vibrating Fork Level Switch

For Liquid Applications

Model: VFLS-700L

Mechanical Drawing

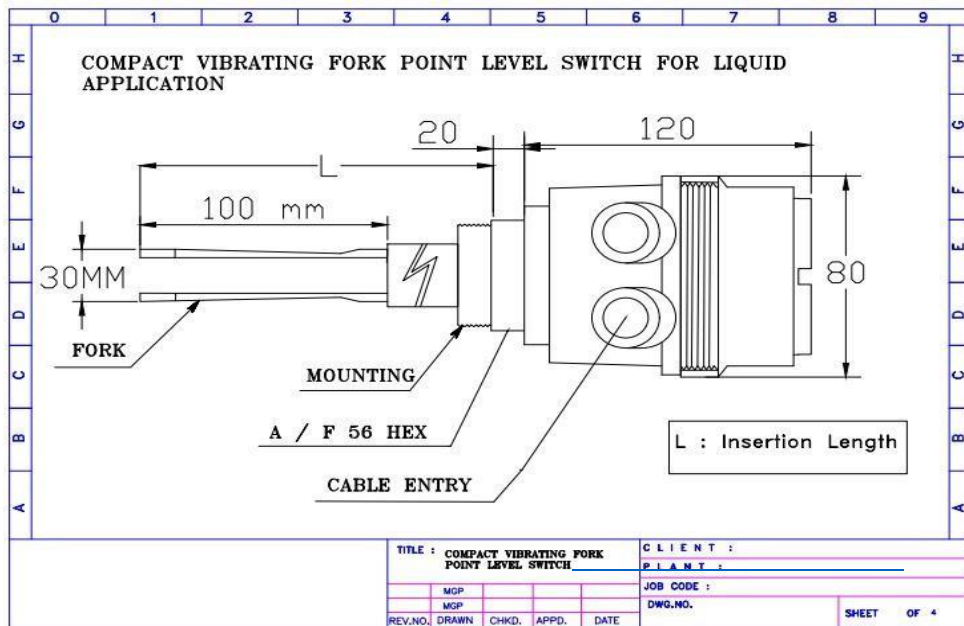

M/S. Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane.Pune411023,

Contact:09579430012/9730042725, E-mail: sales@levtron.in, Web:www.Levtron.in