



Float level transmitter For Liquid Application

Model: MFLT-1100L




Float level transmitter For Liquid Application

Model: MFLT-1100L



TECHNICAL DATA

Overall Length	: 300mm to 5000mm
Measuring Error	: ± 0.25 % of Span
Output Temperature Co-efficient	: $\pm 0.007\%$ / $^{\circ}\text{C}$
Resolution	: 5mm / 10mm
Ambient Temperature	: - 40 $^{\circ}\text{C}$ to 60 $^{\circ}\text{C}$
Liquid Temp. Range	: - 40 $^{\circ}\text{C}$ to 120 $^{\circ}\text{C}$
Liquid Min. Density	: 0.8 gm/cc
Max. Pressure	: 10 Kg/cm 2
Protection Category	: Weather Proof Ip66 to IS:2147 (or) Flame proof Gr. IIA & IIB to IS:2148
Terminals	: Max. 1.5mm 2 Flexible
Cable Entry	: PG11 for Weather Proof : 3/4" ET for Flame Proof (Glands not Supplied)
Current Output	: 1) 2 Wire, 4.... 20 mA : 2) 3 Wire, 0-10VDC : 3) RS 485 : 4) Resistance as per customer request
Process Connection	: 1) Threaded : 2) Flanged : 3) Tri Clamp : 4) Others
Excitation Voltage	: 10 - 36 V DC
Loop Resistance	: Max. 1200 OHMs

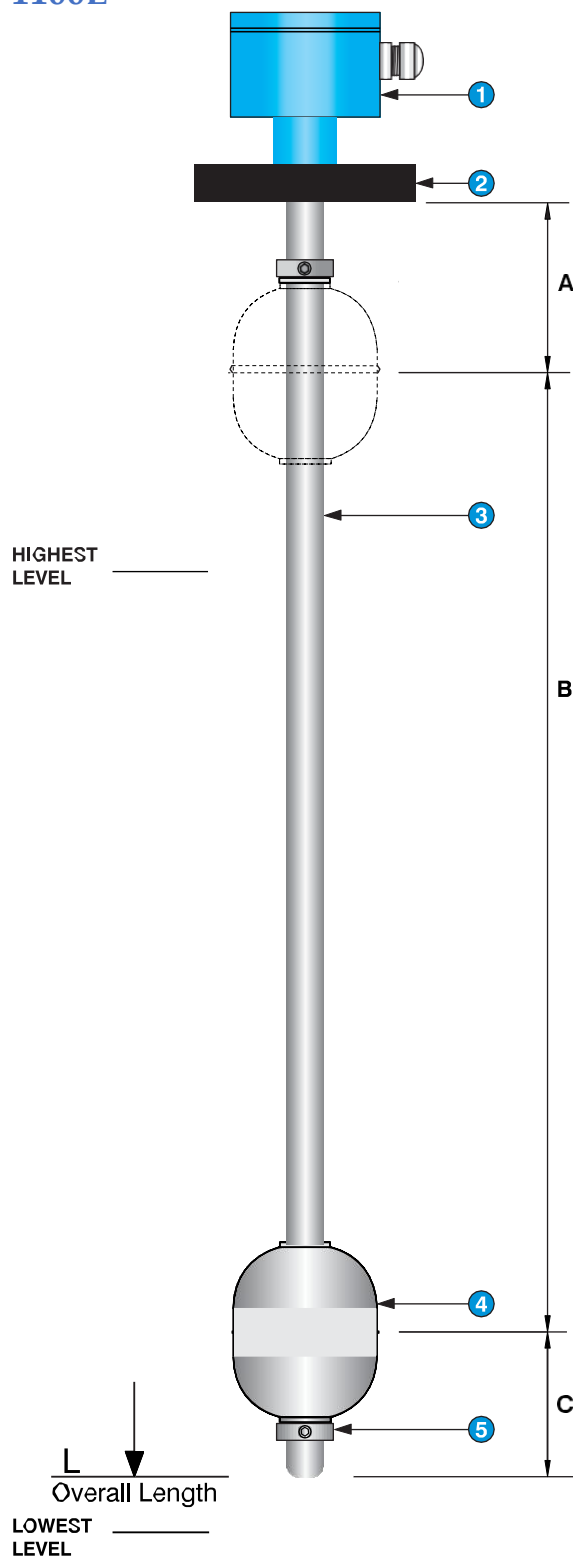

NOTE : Analog Output : 4 mA @ Lowest Level
: 20 mA @ Highest Level

A - Top Dead Band
B - Measuring Range
C - Bottom Dead Band

Float level transmitter For Liquid Application

Model: MFLT-1100L

Float Liquid Level Transmitters

- # Length up to 5 metres
- # Alloy or Engineering Plastic Wetted parts
- # Analog Output
- # Field Calibration

CONSTRUCTION

Float Level Transmitter consists of nonmagnetic sealed stem containing series of reed switches and resistor, Float carrying magnet, mounting adaptor (or flange) and enclosure containing electronics.

OPERATING PRINCIPLE

Stem carrying series of reed switches and resistors forms a "Potentiometer" circuit which extends to the full indicating length of the transmitter. The reed switches are tapped at regular intervals and this tap off point is connected to electronics in enclosure. As the float travels through the indicating distance, the magnet located within it tap off the reed switches thereby varying the resistance fed to the electronics (as shown in figure below), which in turn converts the change in resistance to industry standard analog output.

TYPICAL APPLICATIONS

Consider our Float Level Transmitters for all your continuous liquid level monitoring needs like Water, Diesel, Lube oils, Fuels, Chemicals and Petrochemical liquids.


Here are just few areas where transmitters can be used.

- # Utilities
- # Beverage Industry
- # Medical
- # Pharmaceuticals
- # Food Processing
- # Breweries, etc.

LIMITATIONS


Float Level Transmitters does not work satisfactorily in highly contaminated liquids and liquids with high viscosity.

For Sensors with more than 3 metres, it is recommended to provide anchoring at the bottom. Also splash guard is recommended where high turbulence of liquid exists. Consult us for further details.

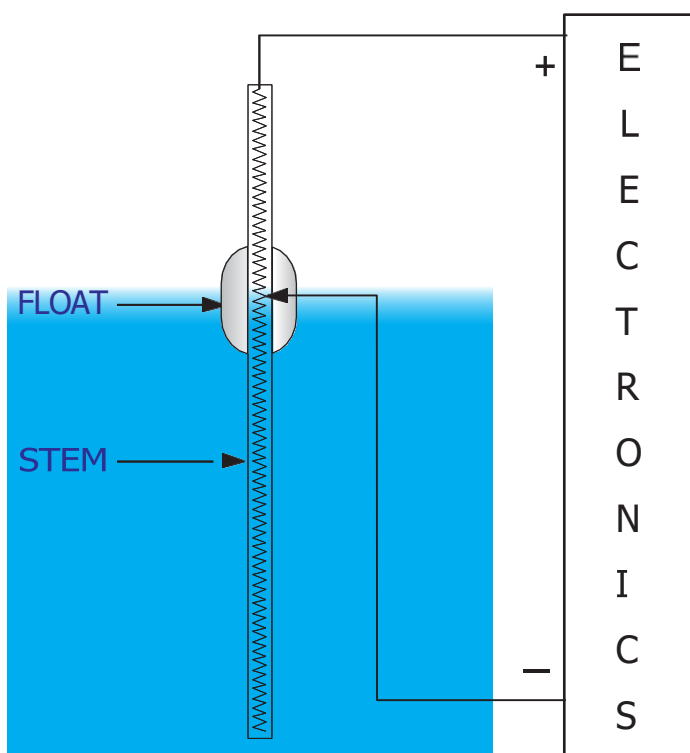


TYPICAL WIRING

A : 2 wire 4 - 20mA

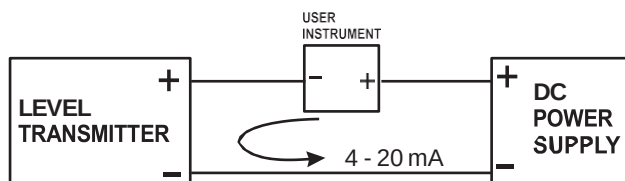


B : 3 wire 0 - 10V DC

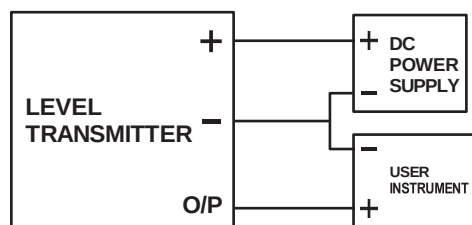



Float level transmitter For Liquid Application

Model: MFLT-1100L

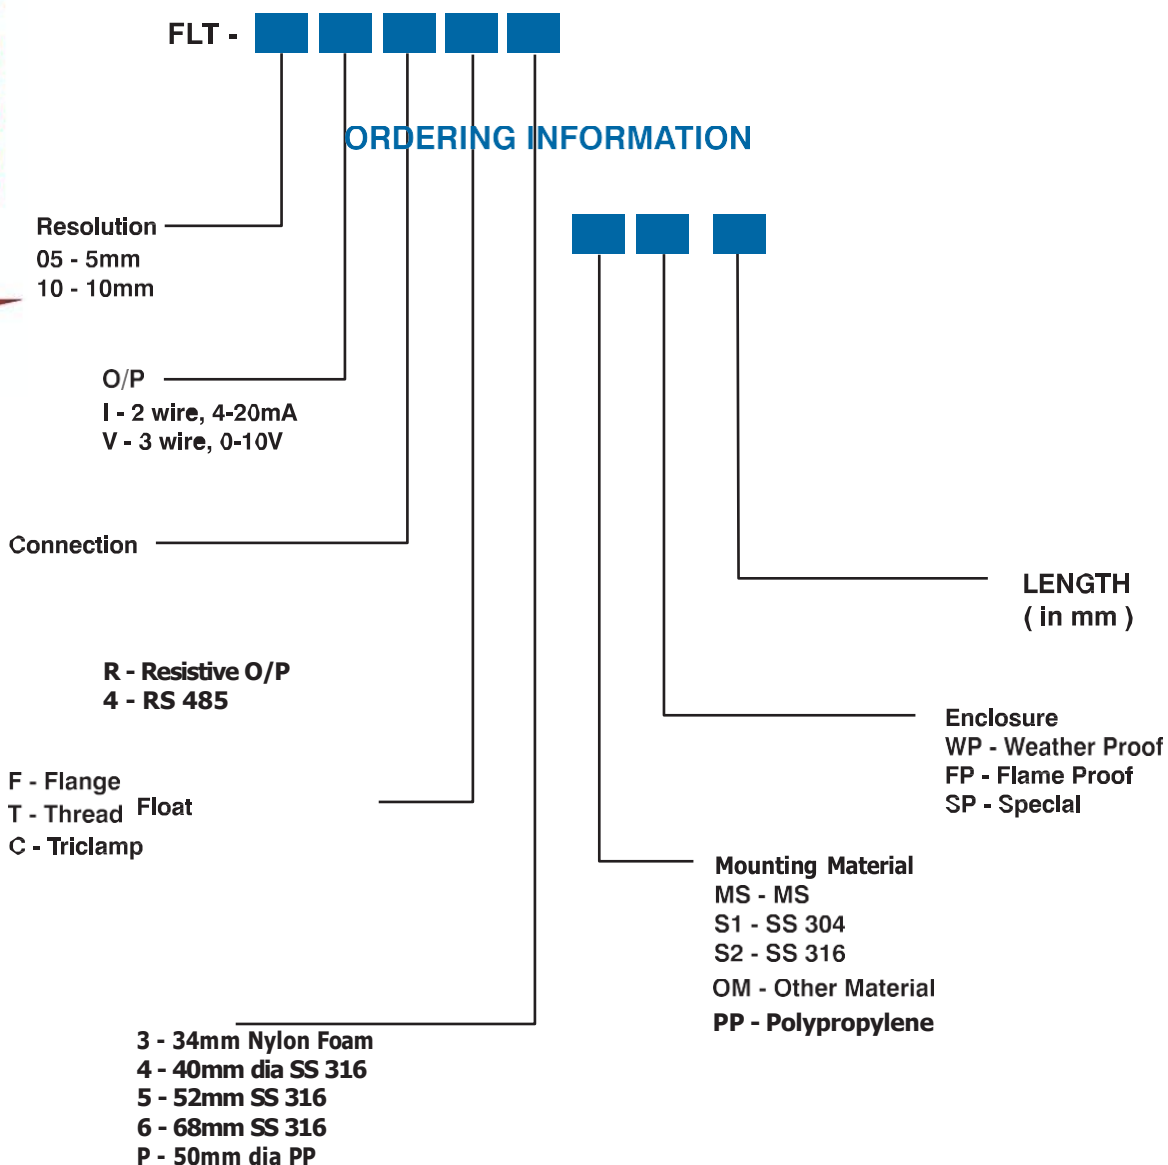

Mounting

10 - 100 dia 80 PCD
75 - 75 dia 60 PCD
1D - 1" Table 'D'
1A - 1" ANSI 150#
2D - 2" Table 'D'
2A - 2" ANSI 150#
ND - 2 1/2" Table 'D'
NA - 2 1/2" ANSI 150#
4B - 1/4" BSP
1B - 1" BSP
NB - 1 1/2" BSP
2B - 2" BSP
NS - Non std mounting

We can also manufacture transmitters with various wetted parts like Polyurethane, PP, PVC, PTFE, etc against specific request.

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,
Contact: 09579430012 / 9730042725 E-mail: sales@levtron.in ; Website : www.Levtron.in