


Horizontal Float Level Switch for Liquid Application Model N0-HFLS-1600L

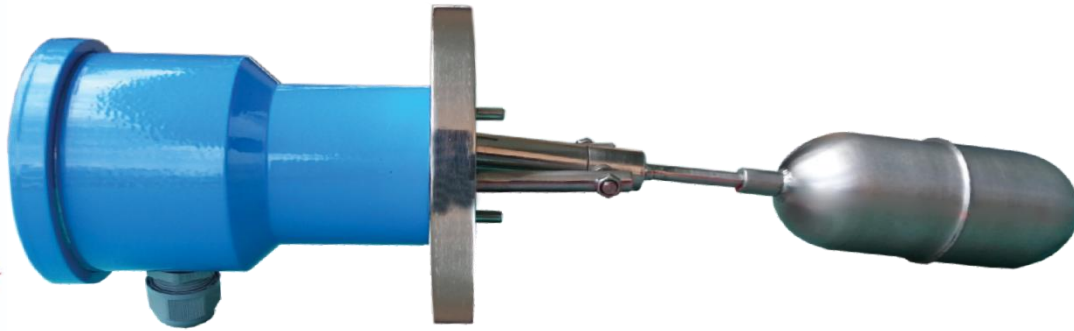

Description:

Side mounted level switch used to control liquid level in vessels containing corrosive or non-corrosive liquids. It is used to pump control, Alarm, valve control or level indication.

Principle

The Float lever Carries a permanent magnet which is repelled by similar magnet mounted in the switch housing. the magnet having the same pole directed towards each other are separated by a non-magnetic diaphragm. The gland less construction offer excellent sealing.

Construction

It consists of 3 main parts:

1. Housing with Micro Switch
2. Mounting Flange
3. Float Assembly
- 4.

Features

- Easy to install
- Reliable



Horizontal Float Level Switch for Liquid Application Model N0-HFLS-1600L

- Available with different flange size
- Available in different MOC

Application

Water, Oil, Fuels, Chemical, Solvents, Syrup etc.,

Technical Specification

Switch Type	:	Micro Switch , SPDT
Switch Rating	:	240 V AC, 5A
Enclosure	:	Weather Proof , Flame Proof
MOC	:	Cast Aluminum ,SS ,PP
Flange	:	SS 304 Also Available In ANSI ,BIS,DIN
Standard Flange		
Moc	:	SS304, SS316 ,PP
Float	:	Dia 50,60,75 , Non Standard
Max Temperature:		150 C (Hi Temperature on Request
Max Pressure	:	20KG /CM(Higher Pressure On Request)

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,

Contact: 09579430012 / 9730042725 E-mail: sales@levtron.in

Website: www.Levtron.in