

RF Admittance level switch

For Liquid Applications Model: RFLS-300L



RF Admittance type level switch is a simple, low cost, rugged point Level Switch designed for Level detection of Liquids, Oils in Tank. This level switch can be used for detecting high, low level or for differential level detection and is used in various level detection applications like Oil, Petrochemicals, slurries, Resins, power utilities industry, food industry, pulp/paper industry, pharmaceuticals industry, water/ treatment plants, foundry industry etc.


The specialty of the probe is that it tends to ignore the build-up on the probe, thus making it suitable for application, which tends to stick on the probe.

The unit has integral electronics along with time delay feature, LED indication, fail safe mode etc.

SALIENT FEATURES

- Wide range of application
 - Easy installation and maintenance.
 - Weatherproof/Flameproof enclosure as per requirement
 - PTFE insulated electrode capable to withstand @ 180°C
 - No moving parts, no mechanical wear and tear.
 - Adjustable differential time delay with ON/OFF timing.
 - Fail Safe High/Low Selection Feature (Field configurable)
- Ignores Build Up of Sticky and Conductive Material between Probe and Vessel Walls

Probe Construction suitable for material build up:

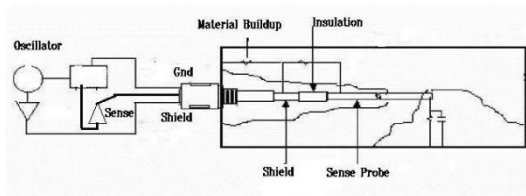

Normal probe tends to fail when there is a build-up on the probe. The COAT Guard electrode senses the material build up on the probe by employing a special Build up sensing technology. The COAT guard unit is insulated from the active probe and the ground is driven with same RF frequency as that of active electrode and having the same polarity. When a material

build up is formed on the probe, the RF current from the COAT guard unit tends to saturate the build-up area between COAT guard probe and silo wall, thereby no electrical energy will flow from active probe to tank wall. When the material level goes up and touches the sense probe a RF current will flow from the sense probe to ground over and above the saturated region formed by the Built-up sensing circuitry.

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,
Contact: 09579430012 / 9730042725 E-mail: sales@levtron.in; Website : www.Levtron.in

RF Admittance level switch


For Liquid Applications Model: RFLS-300L

Datasheet:

Model: RFLS-300L

SUPPLY VOLTAGE	230VAC or 110VAC or 24V DC / Universal (factory selectable)
OUTPUT TYPE	1 DPDT Relay
CONTACT RATING	05 AMPS @ 230VAC /24VDC, Resistive load Dual
CABLE ENTRY	PG 13.5 MM
TEMPERATURE	0-150°C for integral type. 0-150°C for integral with Standoff, type 0-250°C for Remote with Standoff, Ceramic type
PROBE	Type: Rigid Probe with Coat guard electrode Insulation: Teflon Insulation Probe Length: As per requirement, Housing: Cast Al.
MATERIALS	Probes (Sense & Shield SS316/SS304), Flange/Adapter: SS316/SS304/C.S.
MOUNTING	Flanged or threaded process connection as per requirement.
ENCLOSURE	Weatherproof as per IP 68, Flameproof (optional)
TIME DELAY	0 To 30 seconds adjustable with ON/OFF delay Selection
FAIL SAFE	Selectable.

Mechanical Drawing: Integral Type

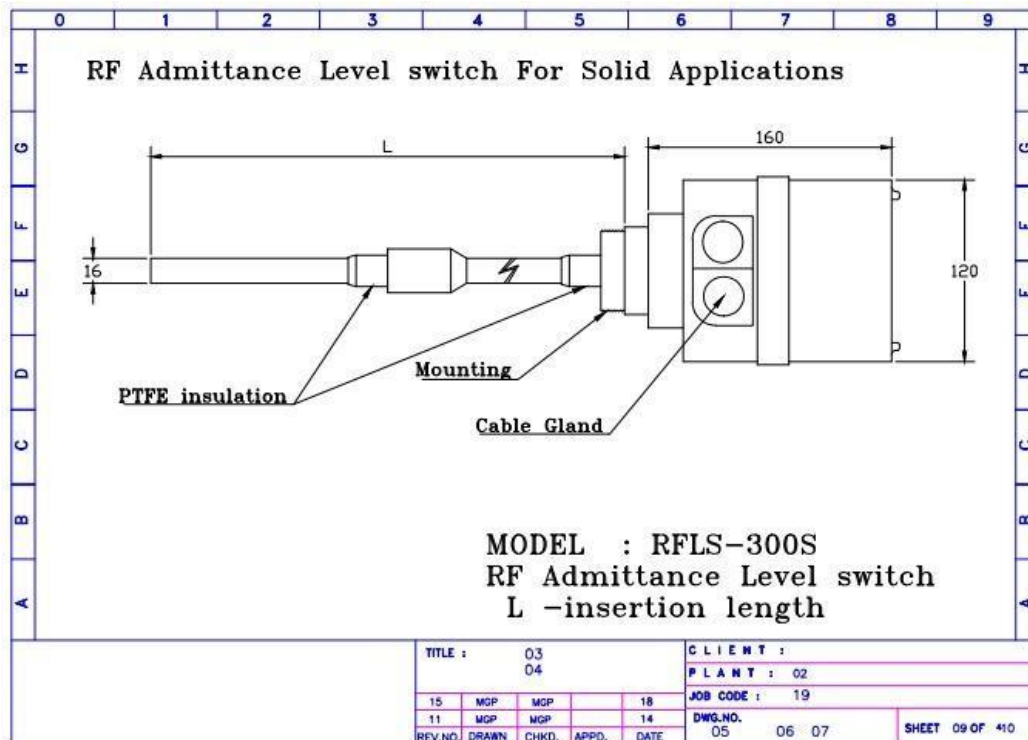


Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,
Contact: 09579430012 / 9730042725 E-mail: sales@levtron.in; Website : www.Levtron.in

RF Admittance level switch

For Liquid Applications Model: RFLS-300L

Mechanical Drawing: Remote Type

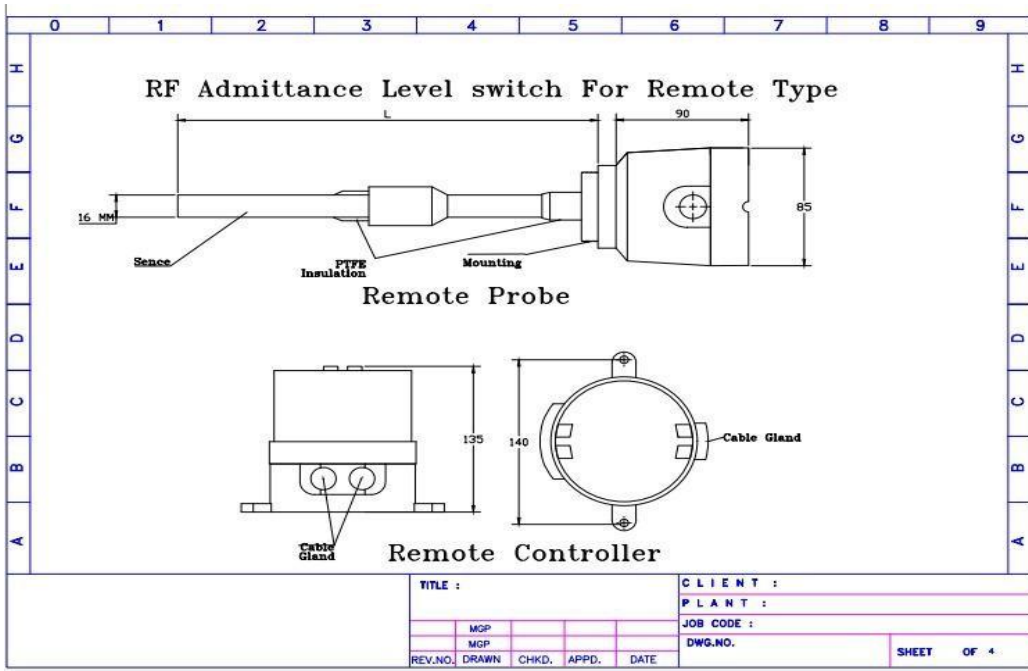

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,
Contact: 09579430012 / 9730042725 E-mail: sales@levtron.in; Website : www.Levtron.in