

Capacitance Level Transmitter for Liquid Applications

Model: CPLT1200L



Description:

Capacitance level transmitter is used in level sensing applications of variety of Liquids. It is available for conductive, nonconductive liquids. It is offered with PTFE sleeve for better insulation & to withstand high temperature.

In conductive tanks the insulated probe acts as one electrode & the tank wall as another electrode, any change in liquid level the dielectric value will change thereby changing the capacitance value proportional to the liquid level. In case of non conductive media applications / non conductive tanks, a reference probe is provided as ground electrode. The output is 4-20mA, 4 wire connection for Isolated supply & 3 wire for non isolated supply.



Capacitance Level Transmitter for Liquid Applications

Model: CPLT1200L

The tank empty (4mA) & full (20mA) calibration is through easy field calibration button in case of 4 wire & 3 wire. Rigid probe is offered for tank depth upto 3 mtr & Flexible probe upto 30 mtr.

Rigid Probe with Grounding tube is suitable for Fuel Level measurement. It is available with different mounting arrangement to suit customer requirement.

It is widely used for water, Edible Oils, Petro-chemicals, Acids, pharma applications.

Model: CPLT1200L

Make: Levtron Instruments Pvt. Ltd. Pune

Technical Specifications:

Type: Capacitance Level Transmitter 4 Wire

Supply: 24 V DC

Output: 4-20 mA

Permissible Load: 500 Ω

Measurement Range : 200MM to 2000MM in Rigid Probe.

(Up to 30000 MM in Flexible Probe for other Liquids).

Max Pressure: Up to 5 KG/CM³

Temperature: 25 to 120°C

Enclosure: Dicast Aluminium Weatherproof / Flameproof IP 66

Resolution: 0.5 MM

Accuracy: 1% of Full Scale.

Process Connection: 1" / 1½" BSP/NPT/ Flanges(Specify).

Cable Entry: ½" or ¾" ET / NPT (Specify)


Capacitance Level Transmitter for Liquid Applications

Model: CPLT1200L

Salient Features:

- Compact size with integral electronics
- Pre calibrated. Also Easy calibration on site.
- No moving parts so no wear and tear
- Flameproof IP 66 ingress protection
- LED indicators for status
- 4-20 mA isolated Output

Drawing:

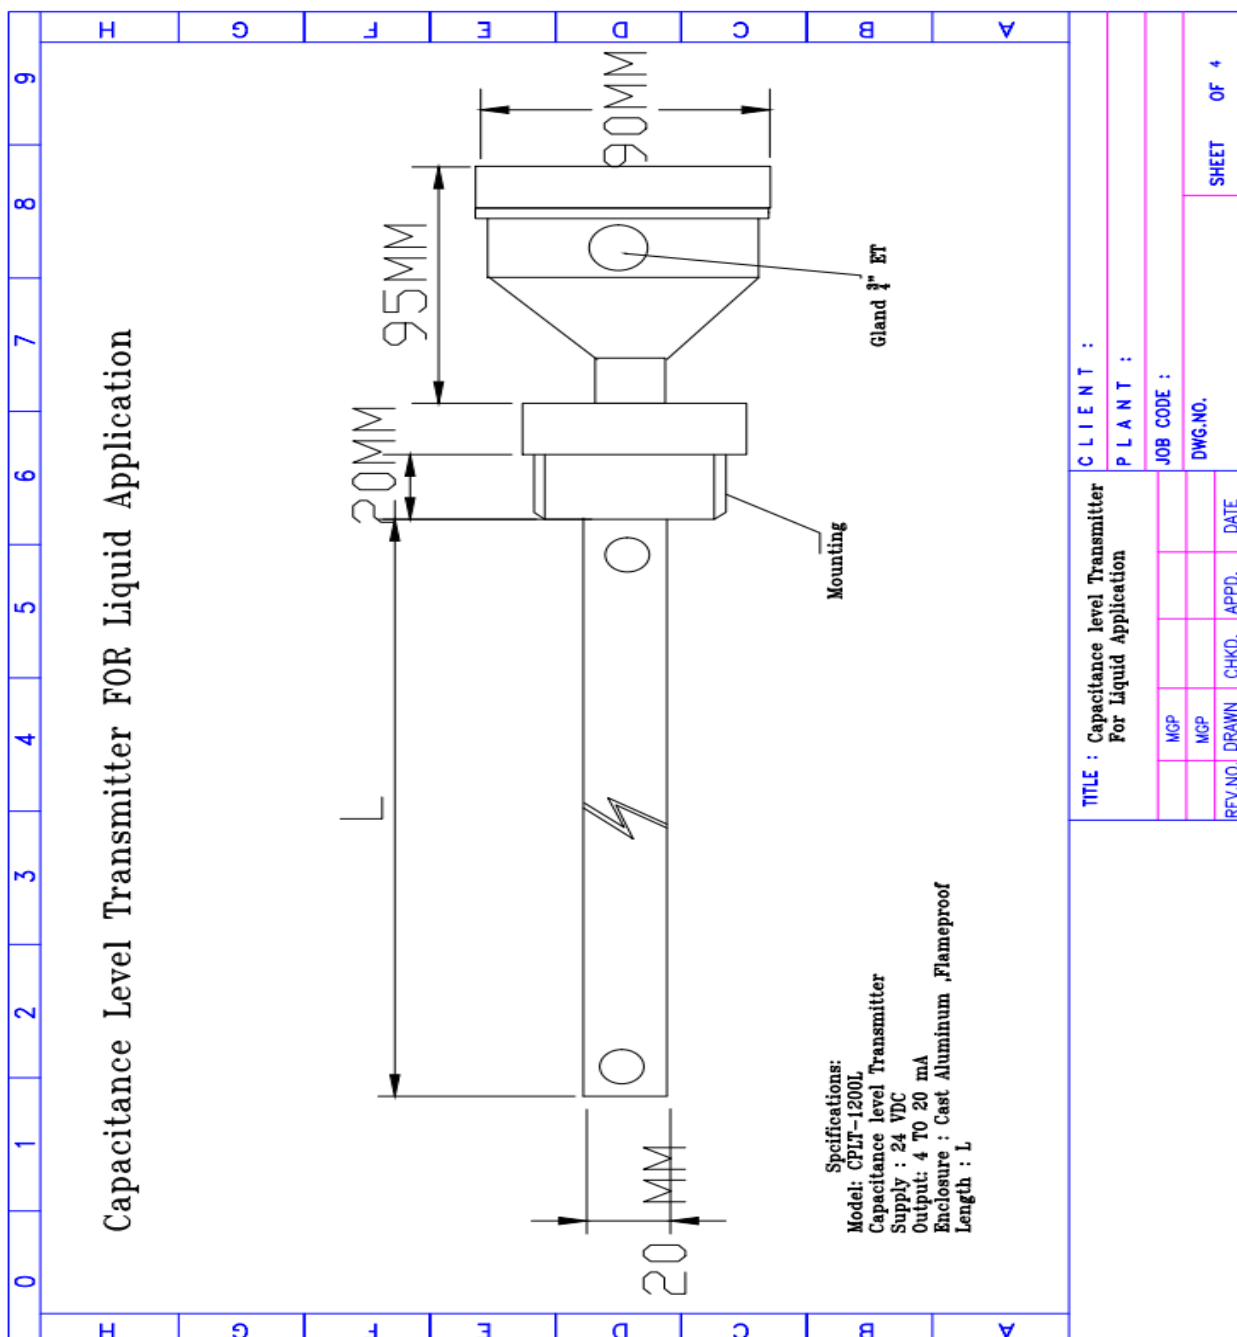

Capacitance Level Transmitter for Liquid Applications

Model: CPLT1200L

Optional Process Indicator Display

Power supply: 230 V AC 50 Hz / 24 V DC @ 3 VA
Max Specify.

Out Put: standard SPDT Relay x2 Nos,

4-20 mA Retransmission

For Sensor Supply : 24 V DC 2 250 mA

Max.

Communication :Programable RS 485

Modbus.

Relay output: 2 x Potential free C/O contacts

Manufactured By:

M/S. Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane.

Pune 411023, Contact: 09579430012 / 9730042725

E-mail: sales@levtron.in;

