

Float & Board Level Indicator Model No-FBLI-2400L

INTRODUCTION

The Levtron Instruments Pvt Ltd Float & Board Level Indicators are designed for an accurate, reliable & trouble-free float operated technique used in large non-pressurized storage tanks.

PRINCIPLE

The Float & Board Level Indicators consists of a float connected to a pointer through a rope via a set of pulleys. The pointer glides over a calibrated gauge board, positioned parallel to the tank. The float accurately follows liquid level variations in vertical direction. The vertical float movement is such that the pointer in 'TOP POSITION' when tank is 'EMPTY' and in 'BOTTOM POSITION' when 'FULL'.



Gauge Classification

Measuring Range :	Up to 25 meters. For more than 25 meters please consult factory.
Float :	12 "or 15 "
Calibrated Gauge Board:	6" wide x Al white powder coating with black graduations & numerical 5mm
Least Count :	80°C (PP) / 150°C (SS)
Maximum Temperature:	5 Kg/cm ²
Maximum Pressure :	Ø1.6mm x SS 316 / SS 304 (multistrand) / Ø6mm x PP (multistrand)
Float Wire Rope :	Grounded Level Tank / Underground Tank (sump) / Overhead Tank
Installation :	0.75
Specific Gravity of Fluid :	Carbon Steel Powder Coated
Connecting Pipe :	
Local Indication	
Direct :	Powder coated Red CI pointer with Nylon Rollers to provide super smooth movement along gauge board. Pointer Tip indicates 'Level'.
	Red Capsule moving inside indicator tube. White annular line on capsule indicates 'Level'.
Follower Magnet :	Cadmium Plated Steel Pulley with PTFE bush and SS shaft housed in weather proof CI enclosure.
Pulley Assemblies :	
(2 Nos.)	


Protection Conduit

Horizontal Limb :	GI pipe 25NB x 400mm to 800mm (adjustable)
Vertical Limb :	GI pipe 25NB x 195mm & 100mm long
Process Connections:	1" 150#
Gauge Board Brackets:	Powder coated MS

Special Features


Seal Pot :	For Tanks with vapors pressure up to 600 mm WC or corrosive fumes
Adjustable SW :	Reed SW - 40VA (N/O), 60VA (C/O),
	Micro SW - 5A, 230 VAC (C/O)
	Custom made assemblies can be provided for specific applications

Note :

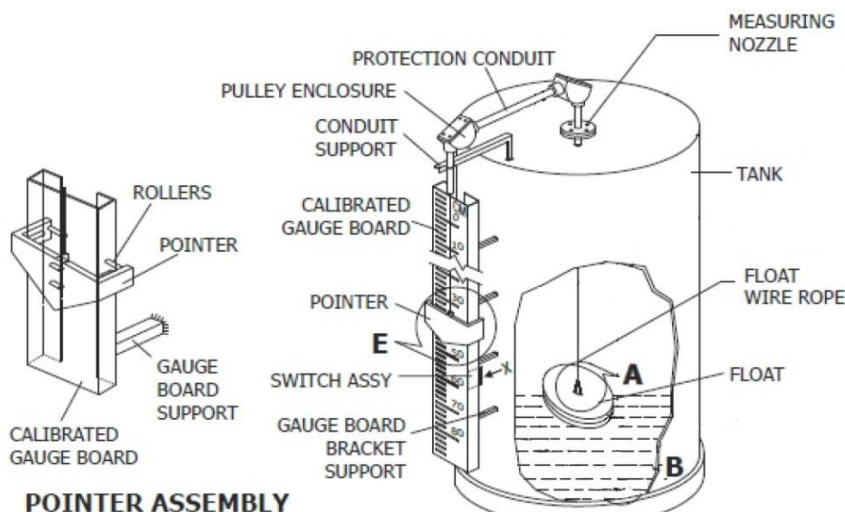

POINTER ASSEMBLY

Float & Board Level Indicator Assembly

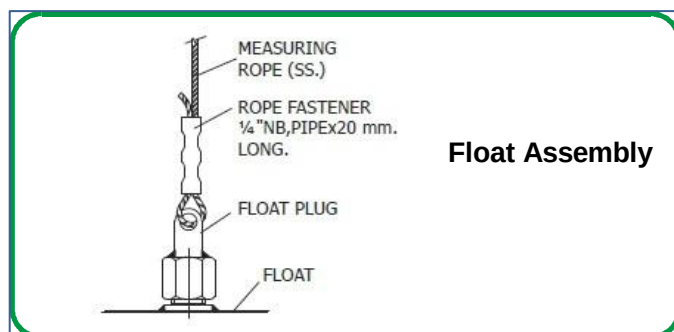

Float Assembly

ORDERING INFORMATION

BASIC MODEL

MATERIAL OF PROCESS CONNECTION

CS = Carbon Steel

S1 = SS 304

S2 = SS 316



PROCESS CONNECTION

Flanged Connections (As per ANSI B 16.5)

F501 = 1/2" 150# RF

F503 = 1/2" 300# RF

F506 = 1/2" 600# RF

F751 = 3/4" 150# RF

F753 = 3/4" 300# RF

F756 = 3/4" 600# RF

XXX = NON STANDARD

F101 = 1" 150# RF

F103 = 1" 300# RF

F106 = 1" 600# RF

F151 = 1 1/2" 150# RF

F153 = 1 1/2" 300# RF

F156 = 1 1/2" 600# RF

F201 = 2" 150# RF

F203 = 2" 300# RF

F206 = 2" 600# RF

F301 = 3" 150# RF

F303 = 3" 300# RF

F306 = 3" 600# RF



MATERIAL OF FLOAT

S2 = SS 316

S3 = SS 316 L



MATERIAL OF SCALE

AL = Aluminum (Standard)

S1 = SS 304



RANGE

Please specify in mm (e.g. Write 2000 for 2000 mm)

(This indicator will be supplied from 1000 mm up to 20000 mm)



OPTIONS

AR1 = Adjustable Reed Switch x 1

AR2 = Adjustable Reed Switch x 2

AM1 = Adjustable Micro Switch x 1

AM2 = Adjustable Micro Switch x 2



Ordering Example :

- ☐ ☐ ☐ ☐ - ☐ ☐ - ☐ ☐ ☐ ☐ mm - ☐ ☐ ☐

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,

Contact: 09579430012 / 9730042725 E-mail: sales@levtron.in Website: www.Levtron.in