


Horizontal Float Level Switch for Liquid Application

Model N0-HFLS-1600L

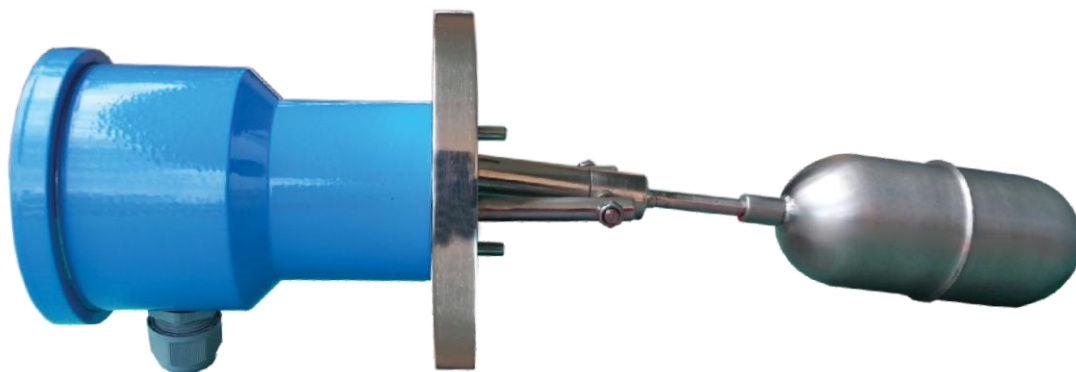

Description :

Side mounted level switch used to control liquid level in vessels containing corrosive or non corrosive liquids. It is used to pump control, Alarm, valve control or level indication.

Principle

The float lever carries a permanent magnet which is repelled by similar magnet mounted in the switch housing. The magnet having the same pole directed towards each other are separated by a nonmagnetic diaphragm. The gland less construction offer excellent sealing.

Construction

It consists of 3 main parts :

1. Housing with Micro Switch
2. Mounting Flange
3. Float Assembly

Features


- Easy to install
- Reliable
- Available with different flange size
- Available in different MOC

Application


Water, Oil, Fuels, Chemical, Solvents, Syrup etc.,

Technical Specification

Switch Type	Micro Switch, SPDT
Switch Rating	240V AC, 5A
Enclosure	Weather proof, Flame proof
MOC	Cast Aluminum, SS, PP
Flange	Standard Dia 120, 92 pcd Also available in ANSI, BIS, DIN Standard Flange
MOC	SS 304, SS 316, PP
Float	Dia 50, 60, 75, Non Standard
Max Temperature	150° C (Higher temperature on request)
Max Pressure	20Kg/Cm ² (Higher pressure on request)

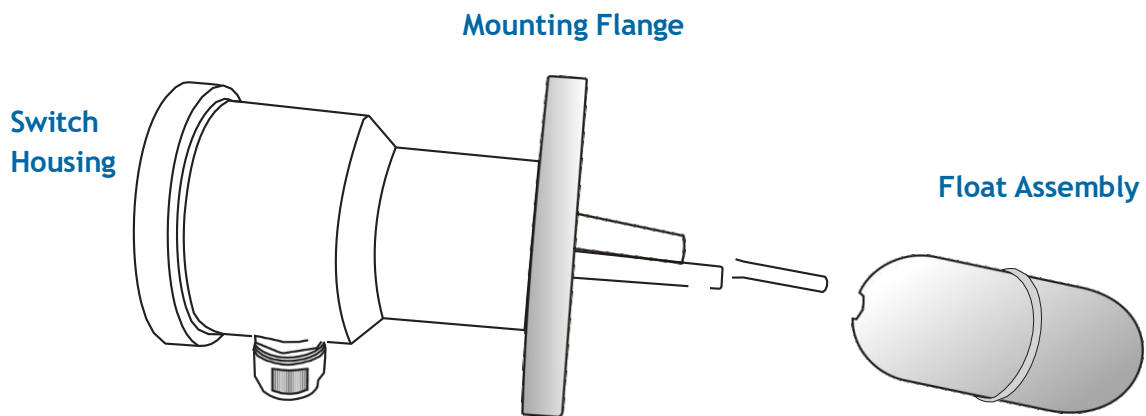

Ordering Information

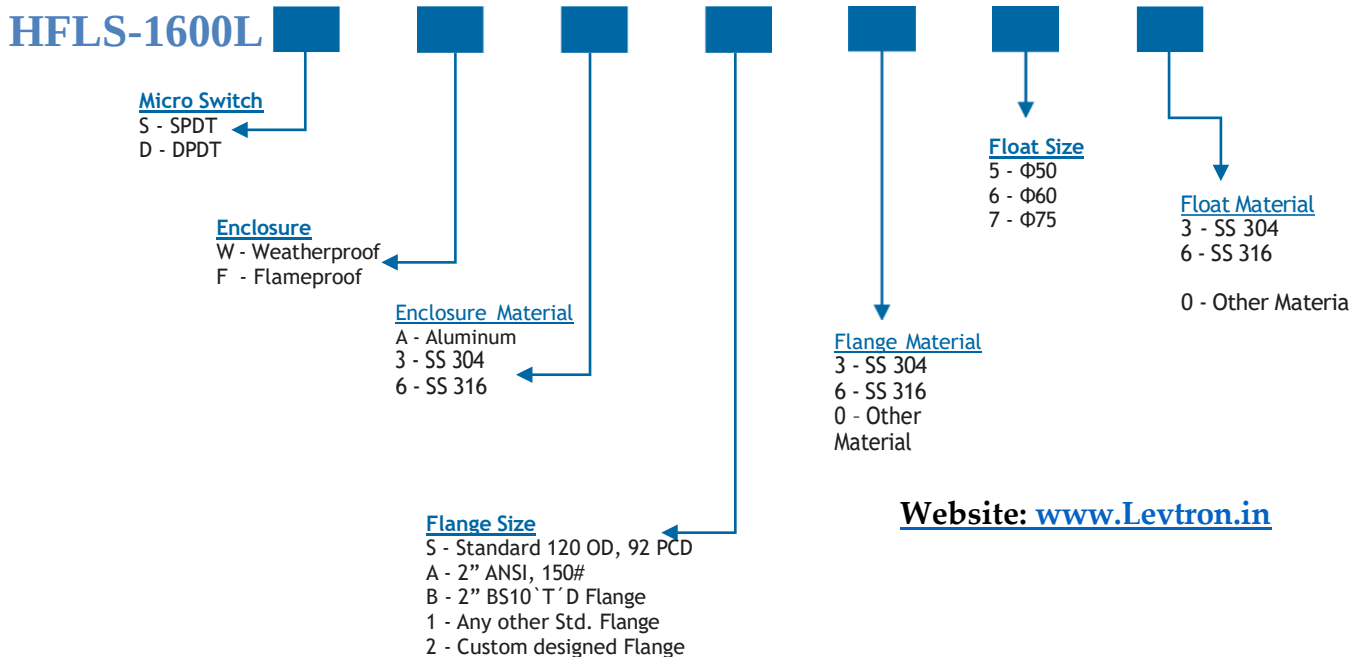

Website: www.Levtron.in

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari
Industrial estate, Shivane. Pune 411023,

Contact: 09579430012 / 9730042725 E-mail:

sales@levtron.in