



RF Admittance level switch with Ceramic Insulation, Model: RFLS-300HD

RF Admittance type level switch is a simple, low cost, rugged point Level Switch designed for Level detection of Bulk materials in a bins or silo. This level switch can be used for detecting high, low level or for differential level detection and is used in various level detection applications like. cement industries, material handling plants, chemical industry, power utilities industry, food industry, pulp/paper industry, pharmaceuticals industry, water/ treatment plants, foundry industry etc.

The specialty of the probe is that it tends to ignore the build-up on the probe, thus making it suitable for application, which tends to stick on the probe.

The unit shown above is integral Type Rod Probe along with time delay feature, LED indication, fail safe mode etc.

Unit Shown Below is Remote type Rod Probe along with time delay feature, LED indication, fail safe mode etc.

SALIENT FEATURES



- Easy installation and maintenance, Wide range of application
- Weatherproof/Flameproof enclosure as per requirement
- Sturdy electrode to withstand impact due to accidental clinker formation. UHMWPE insulated electrode works up to 80°C
- No moving parts, no mechanical wear and tear.
- Adjustable differential time delay with ON/OFF timing.
- Fail Safe High/Low Selection Feature (Field configurable)



M/S. Levtron Instruments Pvt Ltd.


Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,
Contact: 09579430012 / 9730042725 **E-mail:** sales@levtron.in ; **Website :** www.Levtron.in

RF Admittance level switch with Ceramic Insulation, Model: RFLS-300HD

Datasheet: Model: RFLS-300HD

SUPPLY VOLTAGE	230VAC or 110VAC or 24V DC (factory selectable)
OUTPUT TYPE	1 DPDT Relay
CONTACT RATING	05 AMPS at 230VAC /24VDC, Resistive load Dual,
CABLE ENTRY	PG 16
TEMPERATURE	0-120°C for integral type. 0-250°C for integral with Standoff, type 0-450°C for Remote with Standoff, type
PROBE Type:	Rigid Probe with Coat guard electrode
Insulation:	Teflon/Ceramic (for high temperature)
Probe Length:	Std :300MM / As per requirement,
Housing:	Cast Aluminum.
MATERIALS	Probes (Sense & Shield SS316/SS304), SS316/SS304/C.S.
Flange/Adapter:	Flanged or threaded process connection as per requirement.
Mounting:	1½" BSP Standard / Specify.
Enclosure	Weatherproof as per IP 68/ Flameproof (optional)
Failsafe	Field selectable

Mechanical Drawing: Integral Type

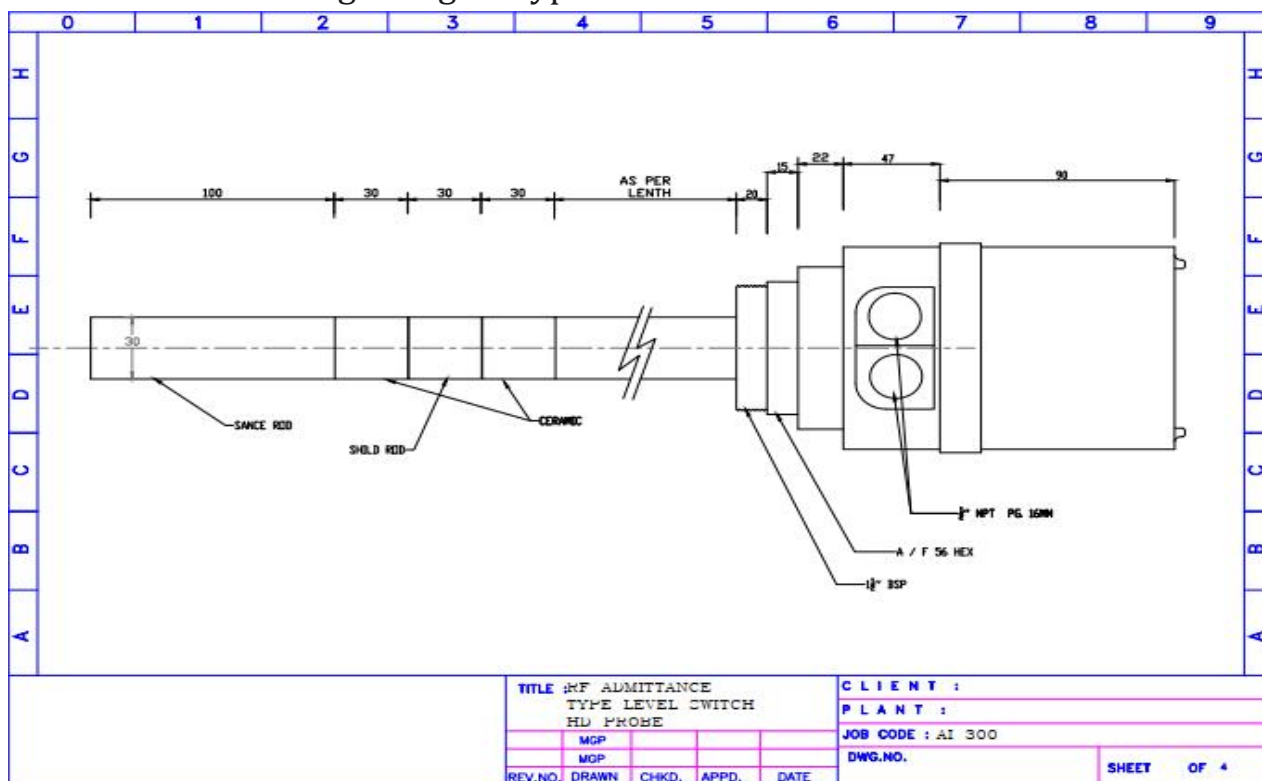


M/S. Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,
Contact: 09579430012 / 9730042725 E-mail: sales@levtron.in ; Website : www.Levtron.in

RF Admittance level switch
with Ceramic Insulation, Model: RFLS-300HD

Mechanical Drawing: Remote Type

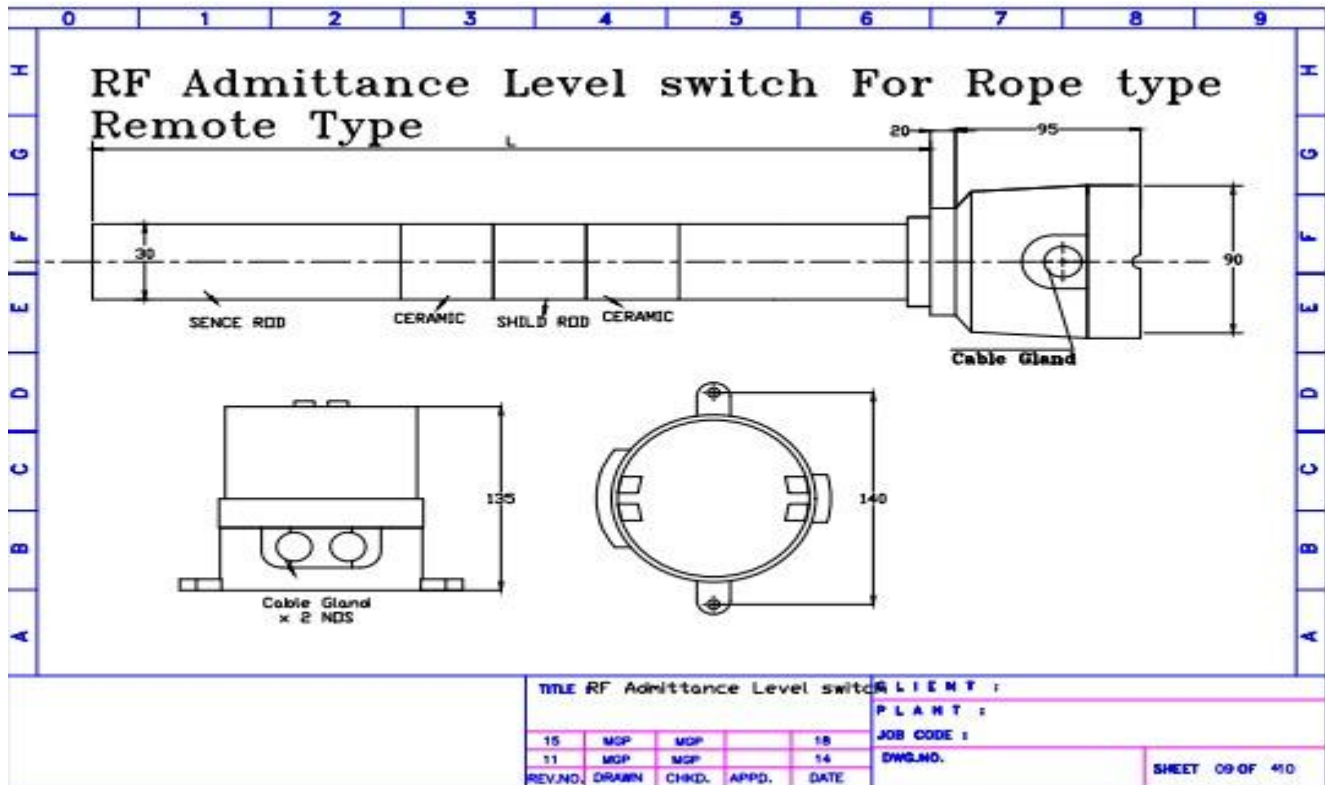

M/S. Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,
Contact: 09579430012 / 9730042725 E-mail: sales@levtron.in ; Website : www.Levtron.in