

Ultrasonic Level Transmitter

Model No-LULT-2300L

"Edge Technology —
Giving You the Edge
Over Others."

Instrumentation | Flow meters, Radar, Temp & Pressure Sensors

Levtron Instruments Pvt Ltd

Address:

Office No 02, 1st Floor, Plot No 6,
Sr. No. 78/1, Pandhari Industrial Estate, Shivane, Pune-411023

Contact:

9730042725 /9579430012

Email:

Sales@levtron.in

Website:

1. www.levtron.in

2. www.levtoninstruments.com

Ultrasonic Level Transmitter

Model No-LULT-2300L

Ultrasonic level measuring instrument, taking the advantages of various many level measuring instruments, is a universal one characterized by total digitalized and humanized design. It has perfect level monitoring, data transmission and man-machine communication. It is featured by strong anti-interference performance; free setting of upper and lower limits and online output regulation, on-site indication, optional analog, switching value, and RS485 output and easy connection with main unit. The cover, made of waterproof engineering plastics, is small and firm with ABS probe. Therefore, it is applicable for various fields concerning level measuring and monitoring. According to the practical situation, it also can add other modules, such as RS 485, current output; it can be match with PLC better.

Technical Parameters

Comprehensive accuracy	0.3%F.S
Blind spot	< 0.4-1.8m (different for range)
Medium	Well water, fire water tank, river water, tap water, etc.
Working temperature	normal temperature, normal pressure
Warranty period	12 months
Frequency	20 ~ 350KHz
Power supply	12-24VDC
Output signal	4 ~ 20mA RL>600Ω (standard) ,1 ~ 5V\1 ~ 10V,RS485 2 NPN,2 relays (AC: 5A 250V DC: 10A 24V)
Housing material	ABS
Power consumption	<1.5W
Dimension	Φ92mm×198mm×M60/79mm×300mm×DN80
Sealing class	IP65(others optional)

Selection table

Product category

LULT-2300L

Range pressure

1,2,3.... 10,15,20,30,40(MAX)

Supply voltage

A:220V, D:24VDC, D1:12VDC

Output signal

4: 4~20MA H: Hart
RS: RS485 AV0:0-5VDC
AV2: 0-10VDC AV3:1-10VDC

Display

N: No display
E: LED D:
LCD

Explosion-proof class

NE: No Explosion-proof
EX: Explosion-proof



Corrosion-proof class

NC: No Corrosion-proof
C: Corrosion-proof

LULT-2300L- 5M D 4 N NE NC

Example **LULT-2300L-5-D-4-N-NE-NC**

Measuring range: **0-5m**, power supply **24VDC**, Output **:4-20MA** , display **No display** with **No Explosion-proof** and **No Corrosion-proof**

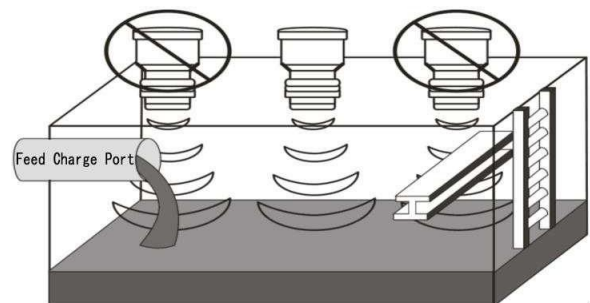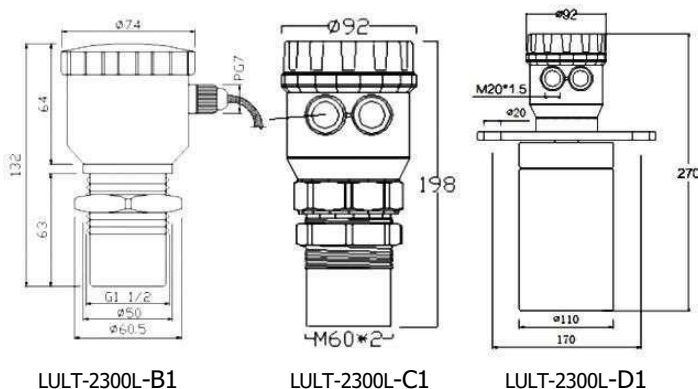


Ultrasonic Level Transmitter

Model No-LULT-2300L


Wiring Diagram

Definition of lead	pin / color	applied
Supply +	⑤DC12~24V+	☉Yes / □No
Supply -	⑥DC12~24V-	☉Yes / □No
Current output	⑨4~20mA	☉Yes / □No
Voltage output		□Yes / □No
Serial output	③RS485(A) ④RS485(B)	□Yes / □No
Output control I	①J1_COM ②J1_NO	□Yes / □No


Wiring diagram of current (voltage) output connecting with secondary instrument

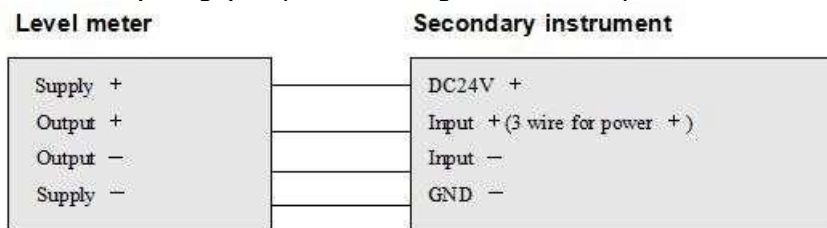

serial output connecting with PC

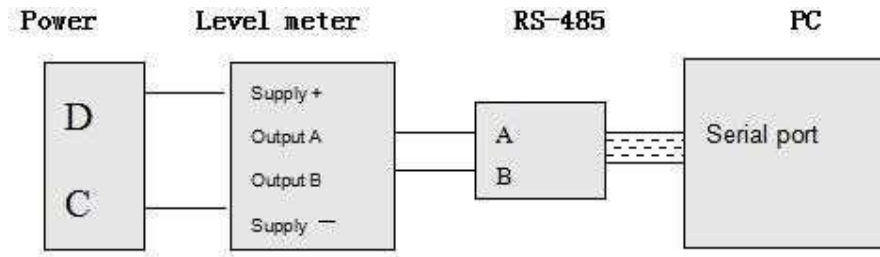

NPN output wiring diagram

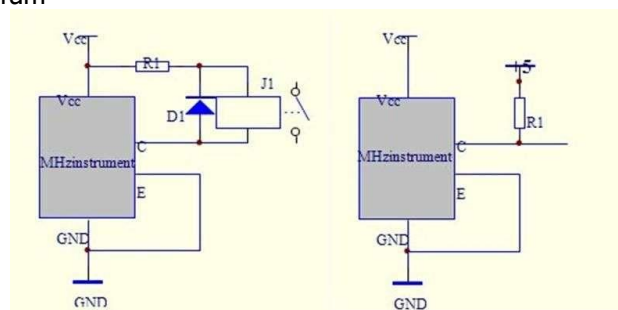

Relay output setting:

This instrument has 2 relays or 3 NPN output. When uses relay control, it must be set control point: D and H. D for relay start point, H for relay end point. X for display value. It works as follows:

When $D < H$

$X < D$ close	D	$D < X < H$ retain	H	$X > H$ Disconnect
---------------	---	--------------------	---	--------------------

when $D > H$

$X > D$ close	D	$D > X > H$ retain	H	$X < H$ Disconnect
---------------	---	--------------------	---	--------------------