

FLOAT & BOARD LEVEL INDICATOR FB LI-2400L



PRODUCT INTRODUCTION:

Levtron Float & Board Level Indicator is a simple, reliable, and cost-effective level indication system designed for continuous visual measurement of liquid level in large, non-pressurized storage tanks. the system operates on a float and counterweight principle, where the movement of the tank float is mechanically transmitted to an external indicator board. The level can be clearly observed from a distance without requiring electrical power. Its rugged construction, easy installation, low maintenance, and reliable operation make it suitable for various industrial liquid storage applications.

OPERATING PRINCIPLE

The LEVTRON Float & Board Level Indicator works on the float, rope, and pulley operating principle. The float moves vertically with changes in the liquid level inside the tank. This movement is transferred through the rope and pulley arrangement to the external pointer. the pointer moves along a calibrated level gauge board, providing a clear visual indication of the liquid level.

Tank Empty → Pointer at TOP

Tank Full → Pointer at BOTTOM

Intermediate Level → Pointer indicates the corresponding level

GAUGE CLASSIFICATION:

Parameter	Specification
Measuring Range	Up to 25 meters. For ranges above 25 meters, please consult the factory.
Float Size	12" or 15"
Calibrated Gauge Board	6" wide, Aluminium, white powder-coated, with black graduations and numerals; 5 mm least count
Maximum Temperature	80°C – PP Float / 150°C – SS Float
Maximum Pressure	5 kg/cm ²
Float Wire Rope	Ø1.6 mm, SS316 / SS304 multistrand or Ø6 mm PP multistrand
Installation	Grounded Level Tank / Underground Tank (Sump) / Overhead Tank

FLOAT & BOARD LEVEL INDICATOR FB LI-2400L

Specific Gravity of Fluid	≥ 0.75
Connecting Pipe	Carbon Steel, powder coated

LOCAL INDICATION:

The LEVTRON Float & Board Level Indicator offers clear and reliable local visual indication through a Direct Pointer or Follower Magnet arrangement.

Type	Description
Direct Pointer	Powder-coated red CI pointer with nylon rollers for smooth movement along the calibrated gauge board. The pointer tip indicates the liquid level.
Follower Magnet	Red magnetic capsule moves inside the indicator tube. A white annular line on the capsule clearly indicates the liquid level.
Pulley Assembly	2 Nos. of cadmium-plated steel pulleys with PTFE bushes and SS shafts, housed in weatherproof CI enclosures.

PROTECTION CONDUIT:

Parameter	Specification
Horizontal Limb	GI Pipe, 25 NB $\times$ 400–800 mm, Adjustable
Vertical Limb	GI Pipe, 25 NB $\times$ 195 mm & 100 mm long
Process Connection	1" 150#
Gauge Board Brackets	Powder-Coated MS

SPECIAL FEATURES



Parameter	Specification
Seal Pot	Suitable for tanks with vapour pressure up to 600 mm WC or corrosive fumes
Adjustable Switch	Reed Switch: 40 VA (N/O), 60 VA (C/O) Micro Switch: 5 A, 230 VAC (C/O)
Customisation	Custom-made assemblies can be provided for specific applications
Maintenance	Simple construction with low maintenance requirements
Operation	Reliable mechanical operation without external power supply

FLOAT & BOARD LEVEL INDICATOR FBLI-2400L



FLOAT & BOARD LEVEL INDICATOR ASSEMBLY:

FLOAT ASSEMBLY

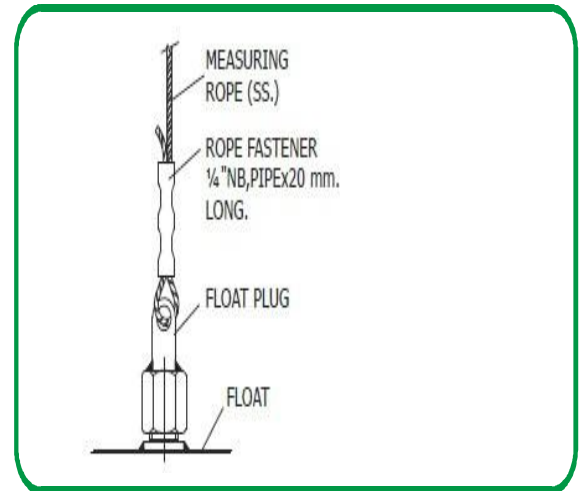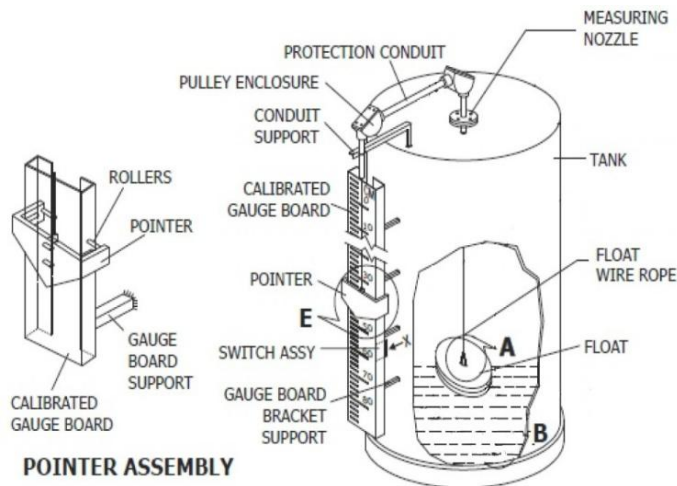

ORDERING INFORMATION – FBLI-2400L MODEL CODE

FBLI-2400L – MR – FS – MF – PC – MPC – LI – SW

Code	Parameter	Options / Specification
FBLI-2400L	Basic Model	Float & Board Level Indicator – Liquid
MR	Measuring Range	1000 to 20,000 mm
FS	Float Size	12" / 15"
MF	Float Material	PP / SS304 / SS316
PC	Process Connection	FL – Flange
MPC	Material of Process Connection	CS / SS304 / SS316
LI	Local Indication	DP – Direct Pointer / FM – Follower Magnet
SW	Switch Option	RS – Reed Switch / MS – Micro Switch / NS – Without Switch

FLANGE SPECIFICATION

Parameter	Specification
Flange Size	1" NB
Flange Rating	ANSI 150#
Flange Facing	RF – Raised Face
Flange Material	CS / SS304 / SS316



FLOAT & BOARD LEVEL INDICATOR FB LI-2400L

SWITCH OPTIONS

Code	Switch	Specification
RS	Reed Switch	40 VA (N/O) / 60 VA (C/O)
MS	Micro Switch	5 A, 230 VAC (C/O)
NS	Without Switch	—

OPTIONAL ACCESSORIES

- SP – Seal Pot
- SO – Special / Customized Assembly


ORDERING CODE EXAMPLE

FB LI-2400L-MR10000-FS12-MF316-PCFL-MPC316-LIDP-SWRS

Description: 10,000 mm measuring range, 12" SS316 float, flanged SS316 process connection, direct pointer indication with Reed Switch



Float and Board Installation Images:

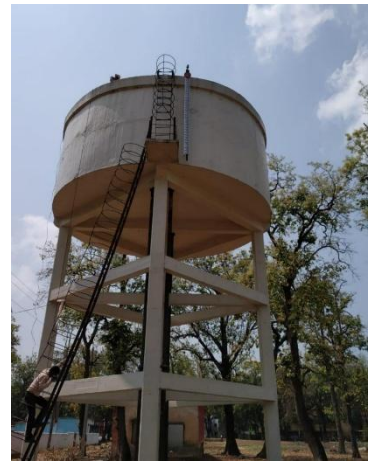

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate,
Shivane. Pune 411023, Contact: +91 9579430012/+91 9730042725,

E-mail: sales@levtron.in www.Levtron.in/

www.Levtroninstruments.com/www.levelsence.in