

Magnetic Level Indicator: LMLI-2100L



Magnetic Level Indicator / Gauge provides clear, high-quality indication, are principally designed as an alternative to glass level gauges. Magnetic Level Gauge is available in Top and Side mounted construction. Magnetic Level Gauge consists of three major components: Float chamber, Float and Indicator system. The visual indicator is available in two types Follower Capsule and Bi-Colour Flapper. Magnetic Level Indicator operates on principles of magnetic field coupling, to provide fluid level information. Float chamber is typically constructed with non-magnetic pipe having process connection that matches to the vessel connections. Float size and weight is determined by the process fluid, pressure, temperature and the specific gravity of process fluid. Float contains magnets to provide 360° magnetic flux field. Simple non-magnetic pipe with flange allows a magnet connected to the Float move up and down inside the tube. An external Bi-Colour Flapper channel or Follower Capsules indicates the level based on magnet position.

Bi-Colour Flapper Design:

Indicator system consists of Bi-Colour Flapper equipped with magnets mounted on rail inside the housing. As the level starts rising or falling magnetic Float also travels with liquid level in non-magnetic chamber. The magnetic interaction between magnets in Float and Bi-Colour Flapper causes each Flapper to rotate 180°

Follower Capsule Design:

Indicator system consists of colour Follower Capsule which moves in glass tube inside the housing. As the level starts rising or falling, magnetic Float also travels with liquid level in non-magnetic chamber. The magnetic interaction between magnets in Float and Capsule causes Capsule to travel along with magnetic Float.


For application where high and low electrical signals are required adjustable limit switch assemblies are provided. In application where continuous output is required, Reed transmitter are supplied.

Application:


Suitable for aggressive, combustible, toxic, high pressure & high temperature liquid storage tanks. It is most widely used in Fuels, Oil, Chemical, Acids, Solvents, Syrups, Beverages, Water, dyes.

Magnetic Level Indicator: LMLI-2100L

Side Mounted Magnetic Level Indicator

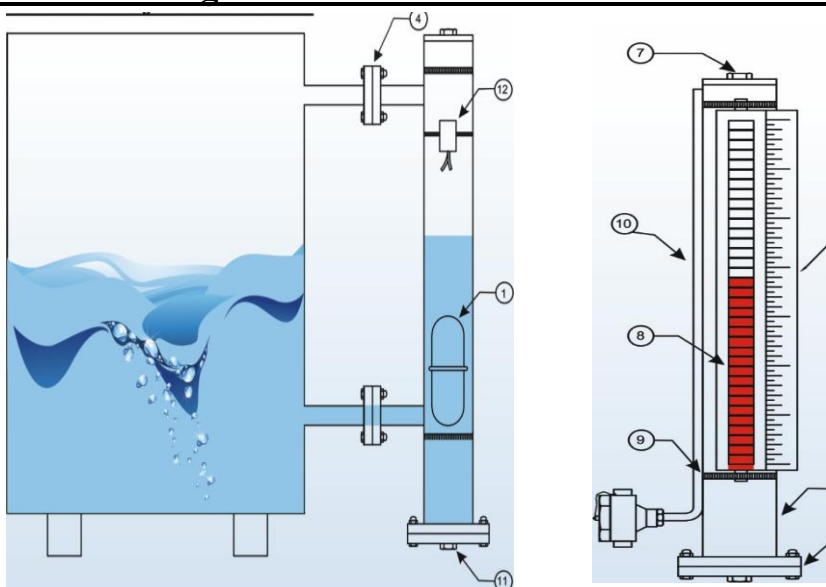

TOP Mounted magnetic Level Indicator

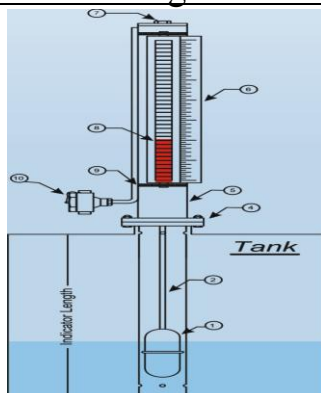


12	Level Switch
11	Drain Plug
10	Level Transmitter
09	Mounting Clamp
08	Flapper
07	Vent Plug
06	Scale
05	Float Chamber
04	Process Connection
03	Chamber Flange
02	Float Rod
01	Float
Sl.No.	part

DETAILED VIEW OF INDICATOR – LMLI-2100L TECHNICAL SPECIFICATIONS

Parameter	Specification
Model	LMLI-2100L
Mounting Type	Side Mounting – S / Top Mounting – T
Indicator Length (C/C Distance)	300 mm to 6000 mm
Indicator System	Bi-Colour Flapper / Follower Capsule
Indicator Housing	SS Housing for SS Flapper / Aluminium Housing for Aluminium Flapper
MOC of Bi-Colour Flapper	SS 304 / Aluminium
Float Chamber	50 NB Non-Magnetic Standard Pipe; Other Sizes on Request
Follower Capsule	Glass Tube in Aluminium / SS Channel
MOC of Float Chamber	SS 304 / SS 316 / SS 316L / PP / PVDF / Others on Request

Magnetic Level Indicator: LMLI-2100L

Parameter	Specification
Float MOC	SS 304 / SS 316 / SS 316L / PP / PVDF / Others on Request
Scale	Graduated Scale as per Measuring Range
Process Connection	Flange / Thread / Tri-Clamp / Union in Various Sizes
Vent	½" Plugged / ½" Ball Valve
Drain	½" Plugged / ½" Ball Valve
Maximum Temperature	70°C for PP / 150°C for SS; Higher Temperature on Request
Maximum Pressure	2 kg/cm² for PP / 10 kg/cm² for SS; Higher Pressure on Request

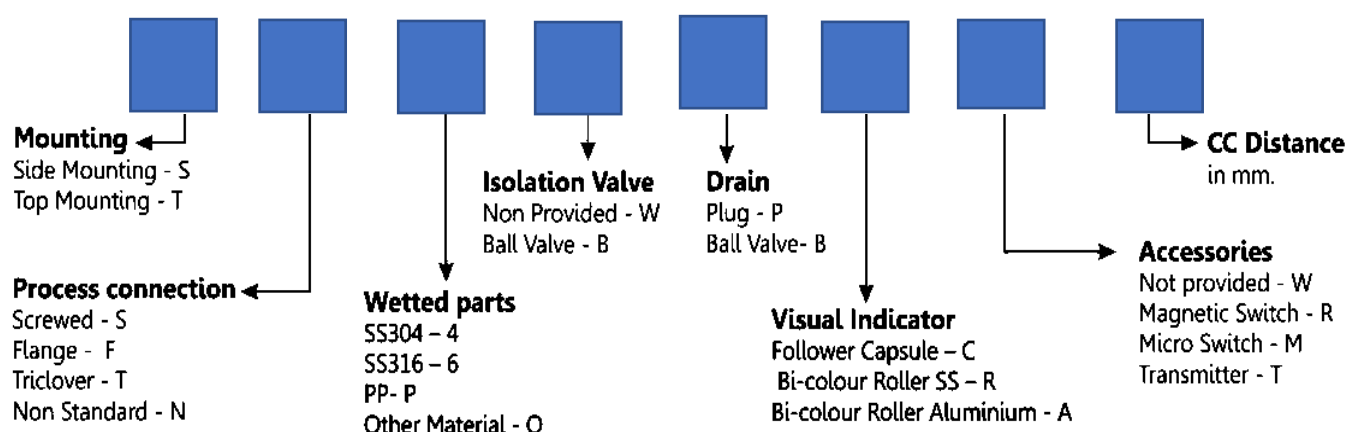

Accessories Option

Not provided	W
Magnetic Reed Switch	R
24 V DC 700mA	• Epoxy potted - A
reed switch housing	• Aluminium die cast weatherproof - B
	• Aluminium die cast Ex-proof suitable for group IIA, IIB - C
Micro Switch	M
Snap acting 1 SPDT	• Aluminium die cast weatherproof - B
Micro Switch 5A, 230VAC	• Aluminium die cast Ex-proof suitable for group IIA, IIB - C
No. of switches	• 1 to 4

Transmitter	T
A. Enclosure	• Weather proof - WP
	• Explosion proof - EP
	• Special enclosure - SP T
B. Resolution	• 5 mm - 5
	• 10 mm - 10
C. Output	• 2 wire 4-20mA - I
	• 3 wire 0-10 V - V
	RS 485 - R

Note : If you select any accessories kindly mention along with ordering information

Manufactured By:
Levtron Instruments Pvt Ltd.
 Office No 2, 1st floor, plot no 6,
 Pandhari Industrial estate, Shivane.
 Pune 411023,
 Contact: +91 9579430012
 /+91 9730042725

E-mail: sales@levtron.in
www.Levtron.in/www.Levtroninstrument.com/www.levelsence.in

Magnetic Level Indicator: LMLI-2100L