



REED TRANSMITTER FOR MAGNETIC LEVEL GAUGE

Principle of operation:

Reed Level Transmitter works on the principle of Variable Resistance where resistors are connected to reed switches in a ladder network. The magnet inside the Float chamber actuates the Reed switch thereby providing a variable resistance output proportional to float position. This resistance is connected to electronic board which converts it into analogue output.

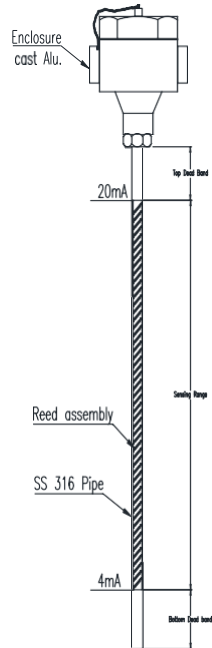

Mounting Options:

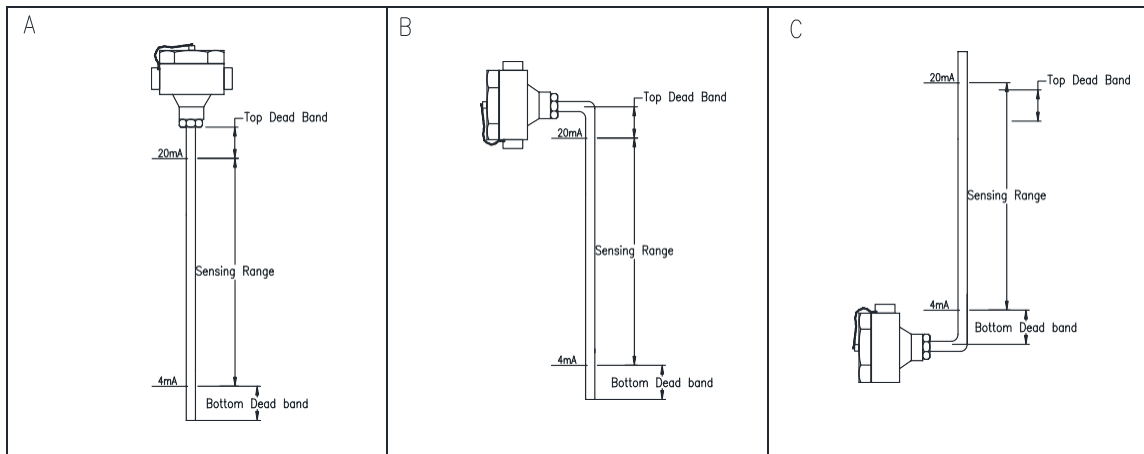

Specification:

Input: 24V DC

O/p: 4-20mA, 0-10V DC, RS 485

Resolution: 5mm, 10mm

Max. temperature : 150° C

C/C: 100mm to 6000mm

Enclosure: Weatherproof, Flameproof

MOC: SS 304, SS 316, PP



Ordering code: **MLI T – A – B – C – D - E A – Enclosure**

WP – Weatherproof Enclosure, Cast Aluminium

FP – Flameproof Enclosure, Cast Aluminium

SP – Special Enclosure

B – Resolution

05 – 5mm

10 – 10mm

C – Output

I – 2 wire 4-20 mA

V – 3 wire, 0-10V DC

R – RS 485

D – Pipe MOC

4 – SS 304

6 – SS 316

P – PP

E – Mounting Option

A – Enclosure Top

B – Enclosure top at right angle

C – Enclosure bottom at right angle

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,

Contact:09579430012/9730042725**E-mail:**sales@levtron.in**Web:** www.Levtron.in