

Hydrostatic Level Transmitter for Liquid Application

Model: HSLT-2000L

DESCRIPTION:

Model HSLT-2000L submersible liquid level transducers and transmitters with flush diaphragm is designed for a wide variety of level measurement applications. This model pressure sensor and is protected by the stainless steel (SS) housing. Featuring the flush diaphragm makes the LV36 suitable to measure viscous media or media with small particles, so as to have diverse measurement applications.

The standard reference pressure is gauge (or relative) pressure realized through a vent tube in the cable. The reference pressure can also be absolute pressure on request.

The measuring range of LV36 transmitters spans from 0~1 to 0~200-meter water column (mH₂O) with measuring accuracy of 0.5%fs (fs = full scale). The output signal of transmitters can be configured to either current loop (4~20mA, standard), voltage output (0.5~4.5V, 1~5V), or digital output (I2C or SPI). The millivolt signal directly from the Wheatstone ridge circuit is also available on request (transducer version).

FEATURES:

- measuring ranges: 0~1m, 2m, 3m, 5m, 6m, 8m, 10m, 12m 15m Higher length request
- output signal: 4~20mA (standard), another o/p optional (~80mV @5Vdc) available on request
- accuracy: 0.5%fs
- compensated temperature range: 0~70°C
- materials: 316L SS (pressure membrane), 316 SS (housing)
- construction: all stainless-steel housing, rigid and robust
- environment protection: IP68



TECHNICAL DATA – HSLT-2000L

Parameters	Units	Specifications
Measuring Media	—	Viscous liquids or liquids containing particles compatible with SS316L
Measuring Range	mH ₂ O	1, 2, 3, 5, 6, 8, 10, 12, 15
Overload Capacity	%FS	150
Output Signal	mA	4–20
Power Supply	VDC	12–36, 24 VDC typical
Accuracy	%FS	≤ ±0.5
Long-Term Stability	%FS/year	≤ ±0.2
Response Time	Ms	<1
Load Resistance	Ω	250–1150
Storage Temperature Range	°C	–40 to +100
Operating Temperature Range	°C	–20 to +85
Compensated Temperature Range	°C	0 to +70
Temperature Coefficient of Zero	%FS/°C	≤ ±0.02

Parameters	Units	Specifications
Temperature Coefficient of Span	%FS/°C	$\leq \pm 0.02$
Process Connection	—	Submersible
Electrical Connection	—	Ø7.3 mm, 4-Core Shielded Black PVC Cable
Membrane Material	—	SS316L
Housing Material	—	SS316
Environmental Protection	IP Rating	IP68
Weight (Without Cable)	g	Approx. 250

ORDERING INFORMATION – HSLT-2000L

Parameter	Code	Selection / Specification
Model	HSLT-2000L	Hydrostatic Level Transmitter
Measuring Range	R	01 = 1 mH ₂ O / 02 = 2 mH ₂ O / 03 = 3 mH ₂ O / 05 = 5 mH ₂ O / 06 = 6 mH ₂ O / 08 = 8 mH ₂ O / 10 = 10 mH ₂ O / 12 = 12 mH ₂ O / 15 = 15 mH ₂ O / XX = Customized
Output Signal	O	420 = 4–20 mA / 010 = 0–10 VDC / 15V = 1–5 VDC / 05V = 0–5 VDC / 045 = 0.5–4.5 VDC / PC = Special
Power Supply	P	24 = 24 VDC / 12–36 = 12–36 VDC
Accuracy	A	05 = $\pm 0.5\%$ FS
Electrical Interface	E	C1 = 4-Core PVC Cable / C2 = Cable with Vent Tube / C3 = Cable without Vent Tube / C4 = M12 / C5 = DIN / C6 = Terminal / CS = Customized
Cable Length	L	05 = 5 m / 10 = 10 m / 15 = 15 m / 20 = 20 m / XX = As Required
Membrane Material	M	316L = SS316L
Housing Material	H	316 = SS316
Vent Tube	V	V = With Vent Tube / N = Without Vent Tube
Environmental Protection	IP	68 = IP68
Special Requirement	S	S = Customized as per Application

ORDERING CODE FORMAT

HSLT-2000L – R – O – P – A – E – L – M – H – V – IP – S

ORDERING EXAMPLE

HSLT-2000L – 05 – 420 – 24 – 05 – C2 – 10 – 316L – 316 – V – 68

Example: 5 mH₂O range / 4–20 mA output / 24 VDC supply / $\pm 0.5\%$ FS accuracy / shielded PVC cable with vent tube / 10 m cable / SS316L membrane / SS316 housing / IP68.


Hydrostatic Level Transmitter for Liquid Application

Model: HSLT-2000L

- Notes:**
1. For customer ranges, consult BCM. For ranges ≤ 0.5 mH₂O, accuracy = 1%fs.
 2. If in your applications the measured medium has different density than water, please inform BCM about the density.
 3. 4-core cable for mV, IC² and SPI bus; 2-core cable for 4~20mA output; 3-core cable for 0.5~4.5V or 1~5V output.
 4. For cable length ≤ 0.5 m, the output can be IC² bus without other interface;
For cable length = 1m, ..., 15m, an RS-232 interface is applied to realize IC²bus. For cable length > 15m, an RS-485 interface is applied to realize IC²bus.
 5. The vent tube is provided in the cable if the pressure type is gauge (relative) pressure. The cable will not be equipped with the vent tube if the pressure type is absolute.

The listed specifications and dimensions are subject to change without prior notice.

Dimensions:

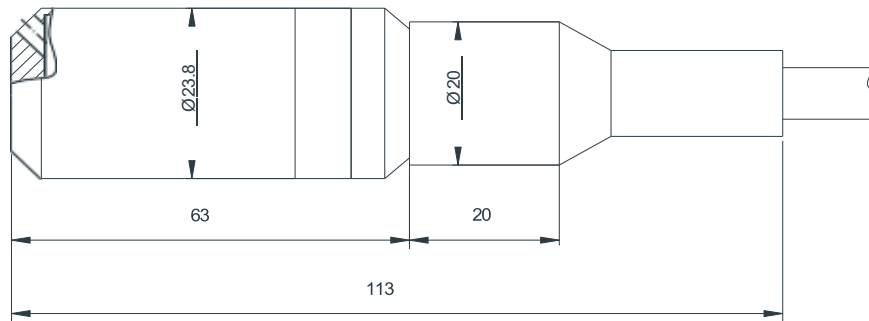

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate,
Shivane. Pune 411023, Contact: +91 9579430012/+91 9730042725,

E-mail: sales@levtron.in www.Levtron.in/

www.Levtroninstruments.com/www.levelsence.in