


Horizontal Float Level Switch for Liquid Application

Model N0-HFLS-1600L

PRODUCT DESCRIPTION

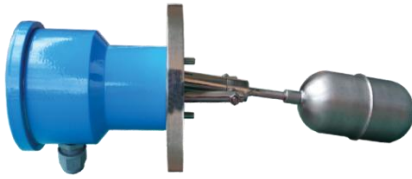


The HFLS-1600L Horizontal Float Level Switch is a compact, rugged and reliable point-level instrument designed for level detection of liquids in tanks, vessels and process equipment. It is installed horizontally through the side wall of the vessel and operates using a float-actuated magnetic switching mechanism.

As the liquid level rises or falls, the float moves with the liquid and actuates the internal switching mechanism at the present level, providing a reliable ON/OFF level signal. The switch is suitable for high-level or low-level detection and can be used for applications such as overflow protection, low-level alarm, pump protection and liquid level monitoring.

The HFLS-1600L is suitable for a wide range of compatible liquids including water, oils, chemicals, coolants and industrial process liquids. Its simple construction, easy installation and dependable operation make it suitable for various industrial liquid-level applications.

SALIENT FEATURES:

- Compact and rugged horizontal side-mounted design
- Reliable point-level detection for liquids
- Magnetic float-operated switching mechanism
- Available with SPDT / DPDT contact output
- Suitable for High-Level / Low-Level detection
- Flameproof / PISO/ ATEX options available
- Suitable for hazardous and non-hazardous areas
- Simple installation and low maintenance
- Suitable for water, oil, chemicals and industrial liquids
- Customised process connection and stem length available



OPERATING PRINCIPLE:

The float lever carries a permanent magnet, which operates through magnetic repulsion with a similar magnet mounted inside the switch housing. The magnets are positioned with like poles facing each other and are separated by a non-magnetic diaphragm.

Horizontal Float Level Switch for Liquid Application

Model N0-HFLS-1600L

As the liquid level changes, the float moves accordingly, causing the float-mounted magnet to move relative to the housing magnet. This movement actuates the internal switching mechanism and provides a reliable SPDT or DPDT electrical output. The glandless, hermetically sealed construction provides excellent sealing and isolates the switching mechanism from the process liquid, ensuring reliable and long-lasting operation.

CONSTRUCTION:

The HFLS-1600L Horizontal Float Level Switch consists of three main assemblies:

1. Switch Housing with Micro Switch – Contains the switching mechanism and provides the required electrical output.
2. Mounting Flange – Provides secure and leak-tight installation of the level switch on the tank or vessel.
3. Float Assembly – Consists of the float lever and permanent magnet mechanism, which responds to changes in liquid level and actuates the micro switch

APPLICATIONS:

Suitable for level detection of water, oil, fuels, chemicals, solvents, syrups and other compatible industrial liquids.

Ideal for storage tanks, process vessels, pump control, high/low-level alarms and liquid-level monitoring applications.

TECHNICAL SPECIFICATION – HFLS-1600L


Parameter	Specification
Model	HFLS-1600L – Horizontal Float Level Switch
Switching Element	Micro Switch
Contact Rating	5 A @ 240 VAC
Enclosure	Weatherproof / Flameproof/ATEX
Housing Material	Cast Aluminium / SS / PP
Mounting Arrangement	Horizontal Side Entry
Mounting Flange	SS 304
Flange Standard	ANSI / BIS / DIN

Horizontal Float Level Switch for Liquid Application

Model N0-HFLS-1600L

Parameter	Specification
Wetted Parts Material	SS 304 / SS 316 / PP
Float Diameter	Ø50 / Ø60 / Ø75 mm; Custom sizes available
Maximum Operating Temperature	150°C; Higher temperature on request
Maximum Operating Pressure	20 kg/cm ² ; Higher pressure on request
Level Detection	High Level / Low Level
Electrical Output	Potential-free SPDT / DPDT Contact
Typical Applications	Water, Oil, Fuels, Chemicals, Solvents, Syrups & Industrial Liquids

Drawings:

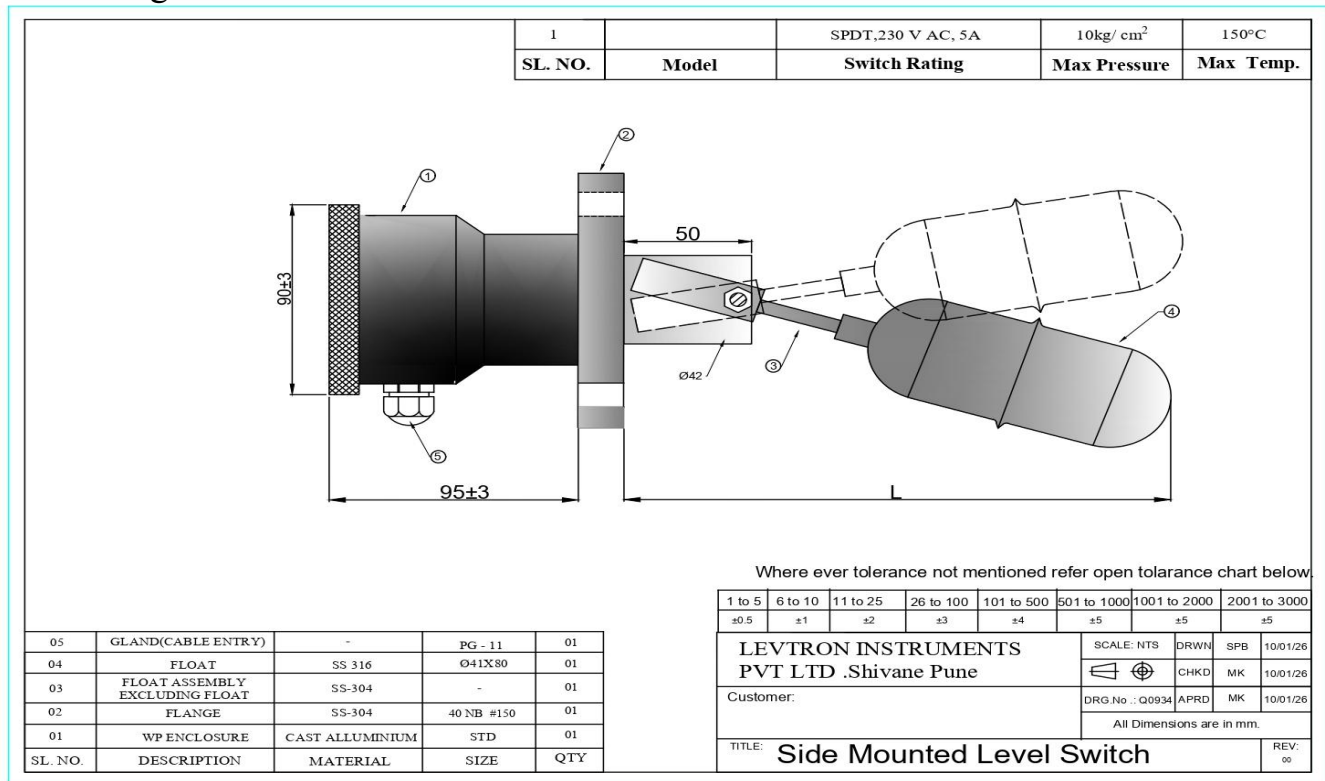

Manufactured By:

Levtron Instruments Pvt Ltd

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,
Contact: +91 9579430012/+91 9730042725, E-mail: sales@levtron.in
www.Levtron.in/ www.Levtroninstruments.com/www.levelsence.in