

Infra Point level switch For Liquid Application Model: IPLS-1000L


INFRA POINT LEVEL SWITCH



INFRA LEVEL SWITCH instruments are suitable for the detection of liquid level in small vessels where space is limited. Level detection is unaffected by electrical and physical parameters of the media such as conductivity, dielectric constant, density, viscosity, air bubbles, color and refractive index. It is very compact and fits in constrained spaces. It is unaffected by vapor and can be easily removed, cleaned and reinstalled. It has no moving parts and can be used for the detection of level in chemical and pharmaceutical industries, food processing, beverages, breweries, hydraulic fluids, oils, water and aqueous media.

OPERATING PRINCIPLE: -

An infrared emitter sends pulsed light into the prism. When the prism is not covered by the media, the light undergoes a total internal reflection and the returning beam is detected by the Photo Detector. When the Prism gets covered by the media the light is dispersed and only a weak beam returns to the Photo Detector. The change in the received intensity is processed by the electronics to signal an Alarm.

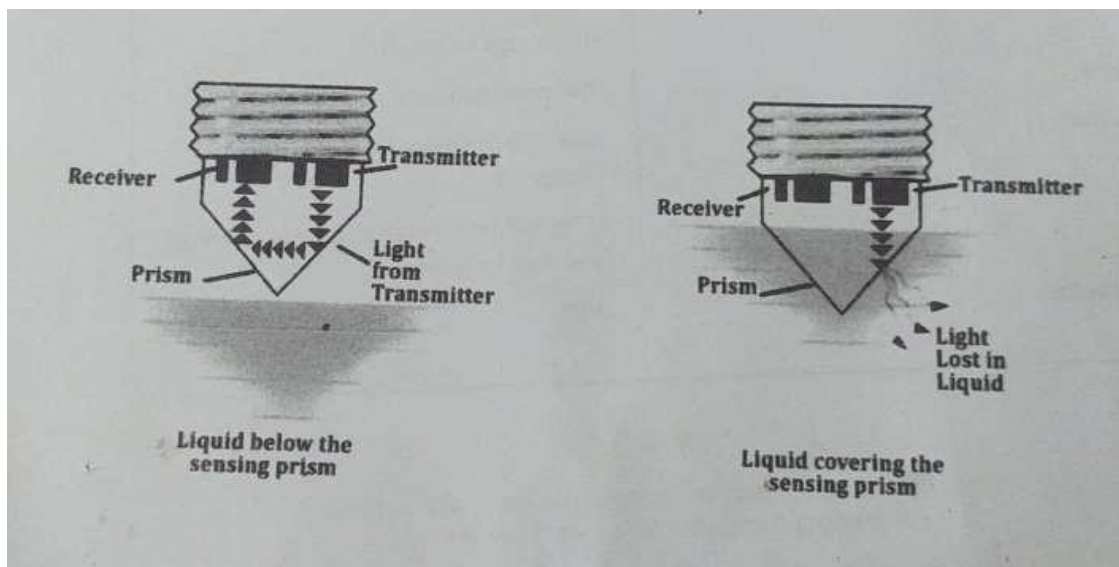

Infra Point level switch

For Liquid Application Model: IPLS-1000L

SALIENT FEATURES: -

- Compact design, no moving parts.
- No calibration required.
- Selectable Fail-Safe mode for High- or Low-level Alarm.
- Built in level status, Alarm and Normal Indicators.
- Pulsed light operation for high ambient light immunity.
- Open Collector PNP Transistor output for connection to PLC or external replay.

DATA SHEET

IPLS-1000– INFRA Point Level Switch

Selection / Ordering Information

Selection	Code	Description
Model No.	IPLS-1000	INFRA Point Level Switch
Application	L	Liquid
Mounting Type	IN	Integral
Probe Type	RD	Rigid Rod
Insulation	PS	Polysulfide
Probe Diameter	D1	Standard 18mm
Probe Material	04 /4L/ 16/ 6L/MS/ SM	SS304/SS304L / SS316/ SS316L /Mild steel/ Special material
Power Supply	DC	24VDC
Output	DP/SP/PN	DPDT Relay /SPDT Relay / PNP Relay
Switching Delay	ND / DA	No Delay / Adjustable
Indication	L / D	LED / Digital Display
Enclosure	WP / FL	Weatherproof / Flameproof
Connection	T	Threaded
	F	Flanged
Mounting	B1 / B2 / B3/B4	1" / 1½" / 2" BSP/ Special Mounting
	N1 / N2 / N3/N4	1" / 1½" / 2" NPT/ Special Mounting
Flange Rating	A1 / A3 / A6	ANSI 150# / ANSI 300# /ANSI 600#
Flange Facing	RF / FF	Raised Face / Flat Face
MOC-Process Connection	S4 / S6/ S16/MS/SL	SS304 / SS316 /SS316L /Mild steel / Special material
Flange Size	01 / 15 / 02 / 03 / 04/PS	1" / 1½" / 2" / 3" / 4"/ Special Process

Infra Point level switch



For Liquid Application Model: IPLS-1000L

Selection	Code	Description
Pressure	P1 /P2/P3/P4	Standard 0 to 2KG/ 2 To 10kg /10kg to 40kg / Customized
Temperature	T1/TS	Max -20–150°C / Customer Specified Special Designed
High Temperature stand off	H8/HS	80MM/Special standoff Extension
Cable Gland	G1/ G2 / G3/ G4	PG13.5 / ½"NPT / ¾" ET/ PG16
Ground / Reference	GS / GX	Standard / Special
Material Certificate	M0 / MC	Not Required / Material test certificate
Test Certificate	TC / CC	Test Certificate / Calibration Certificate
Documentation	DS / GA / IR	Datasheet / GA / Inspection Report
Tagging	TAG	Customer Tag No.
Probe Length	XXXX	25 mm To Customized


Wired Connector Drawing:

Black		Ground	0 V	0 V
RED		HI	+ 24 V DC POWER	Output
GREEN		LOW	OUTPUT	+ 24 V DC POWER
Silver		Shield	Earth	Earth

DIN Connection Drawing:

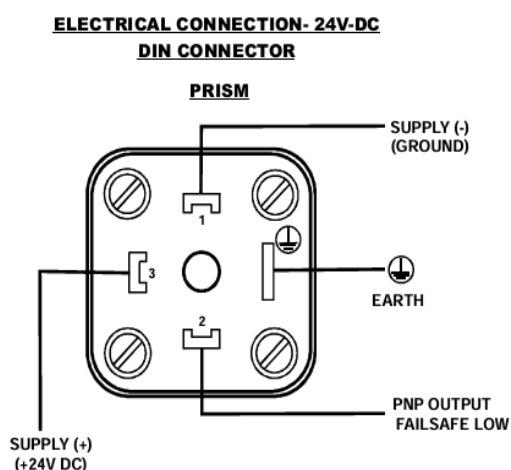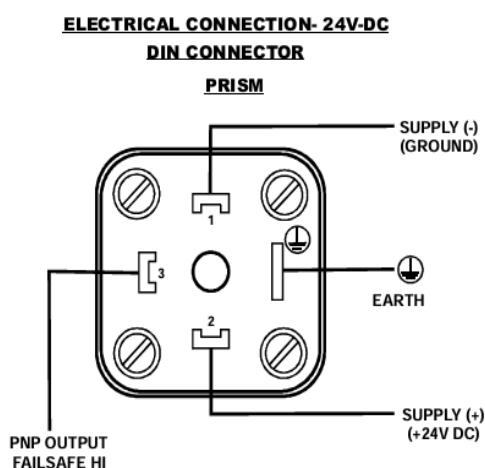

Infra Point level switch For Liquid Application Model: IPLS-1000L

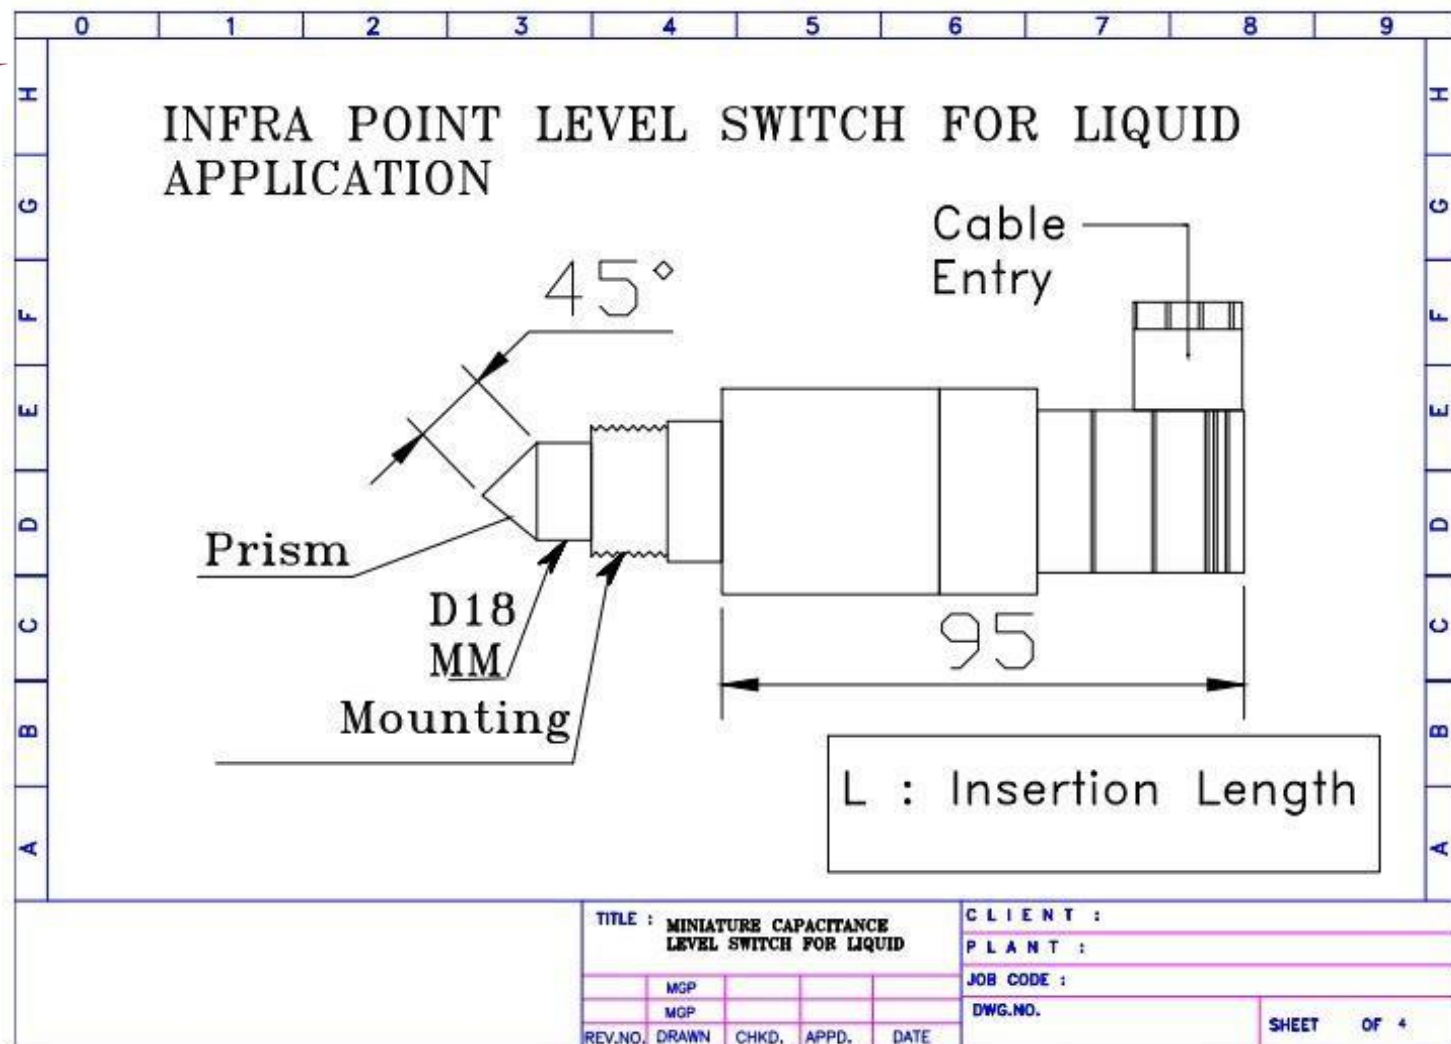

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane.
Pune 411023, Contact: +91 9579430012/+91 9730042725, E-mail:
sales@levtron.in www.Levtron.in/
www.Levtroninstruments.com/www.levelsence.in