

Rubber Diaphragm level switch For Solid Application

Model: RDLS-1400S



PRODUCT DESCRIPTION :

The RDLS-1400S is a rugged and reliable diaphragm-type point level switch designed for detecting the presence of dry, non-hazardous and free-flowing bulk materials in bins, silos, hoppers, chutes and conveyors. The switch detects high, low or intermediate material levels by sensing the mechanical pressure exerted on its flexible diaphragm. When the material reaches the preset level, the diaphragm actuates a sensitive micro-switch, providing a reliable switching output for level indication, process control, overfill protection and material flow monitoring.

SALIENT FEATURES

- Reliable point-level detection in bins, hoppers and silos
- Rugged construction with a simple and proven mechanical design
- Durable cast aluminium housing for industrial applications
- Corrosion-resistant protective coating for enhanced durability
- Available with Nitrile Rubber / Silicone diaphragm / Viton for suitable applications
- External mounting for easy installation and maintenance
- Suitable for monitoring dry, free-flowing bulk materials
- Helps prevent material overflow and maintain the required material level
- Suitable for detecting overfilling and material plugging in chutes and conveyors
- Suitable for bulk materials with density from approximately 20 lb/ft³ (320 kg/m³)
- Suitable for installation in ordinary, non-hazardous locations
- IP65 protection for reliable operation in dusty industrial environments

APPLICATIONS:

The RDLS-1400S is suitable for point-level detection of a wide range of dry, free-flowing and granular bulk materials, including:

- Dry fertilizers, granular chemicals and chemical powders
- Powders, bentonite and potash
- Resin pellets, regrind materials, plastic and rubber beads
- Wood pellets, wood chips and sawdust
- Nut and oil seeds such as peanuts, sunflower seeds and sesame seeds
- Food grains and food products such as rice, wheat, oats and sugar beet
- Other dry, free-flowing bulk solids used in bins, silos, hoppers and
- Bins, silos, hoppers, chutes and conveyors
- Bucket elevators and material handling systems
- High-level, low-level and intermediate-level detection
- Overfill and chute blockage protection

Rubber Diaphragm level switch For Solid Application


Model: RDLS-1400S

SPECIFICATIONS:

Rubber Diaphragm Level Switch – Model No.: RDLS-1400S

Parameter	Specification
Model No.	RDLS-1400S
Sensitivity	100 g – Rubber Diaphragm
Diaphragm / Membrane Material	Nitrile Rubber (NBR)/Viton/Silicon
Ambient Temperature	Up to 60°C
Electrical Contact	Micro Switch, 15 A, 230 VAC
Contact Type	Potential-Free (Dry Contact)
Cable Gland	PG13
Main Body Material	Cast Aluminium
Switching Housing	Cast Aluminium – Rubber Diaphragm Type
Protection Class	IP65

Drawings:

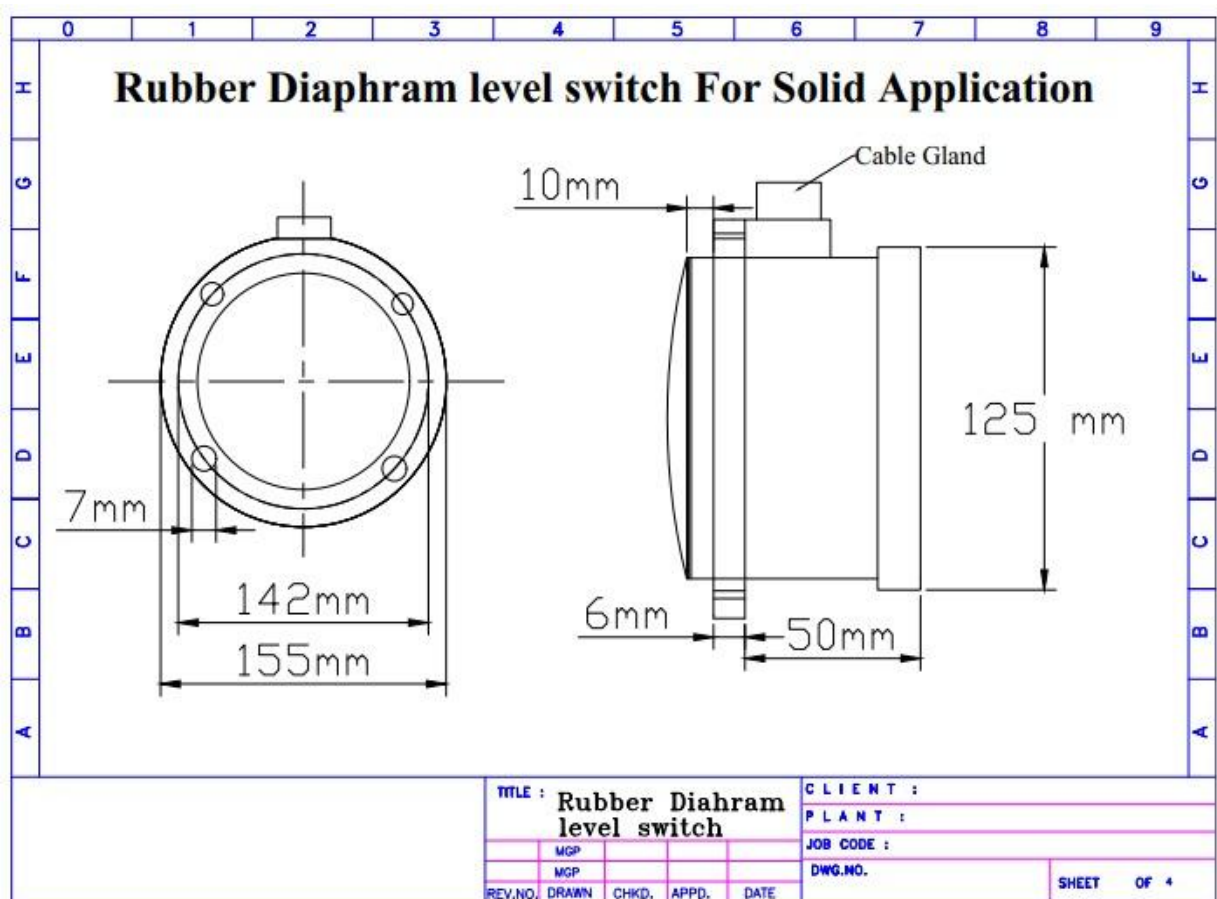

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,
Contact: +91 9579430012/+91 9730042725, E-mail: sales@levtron.in www.Levtron.in/
www.Levtroninstruments.com/www.levelsence.in