

Rotating paddle level switch

For Solid Application Model: RPLS-600S

PRODUCT DESCRIPTION:



The RPLS-600S is a robust and reliable Rotating Paddle Level Switch designed for point-level detection of dry bulk solids, powders and granular materials in silos, hoppers, bins and storage vessels. The instrument operates on a proven electromechanical rotating paddle principle. Under normal conditions, the sensing paddle rotates continuously. When the material reaches the paddle, the resulting resistance stops its rotation, which is detected by the internal mechanism and changes the output relay status to provide a reliable level indication. The RPLS-600S is suitable for High-Level, Low-Level and Intermediate-Level detection and is designed for dependable operation in demanding industrial environments. Typical Applications: Cement, lime, fly ash, coal, grains, cereals, flour, sugar, animal feed, plastic granules, chemicals, detergent powder, wood chips, sawdust and other bulk solid materials.

SALIENT FEATURES –

- Robust and reliable rotating paddle mechanism
- Suitable for dry bulk solids, powders and granular materials
- Suitable for High, Low and Intermediate Level Detection
- Simple and proven electromechanical operating principle
- 1 SPDT relay output for reliable level indication
- Contact rating: 5A @ 230 VAC / 24 VDC
- No calibration required for normal level detection
- Heavy-duty construction for demanding industrial applications
- Reliable operation in dusty and harsh environments
- Suitable for a wide range of bulk materials
- Compact and easy-to-install design
- Low maintenance and long service life
- Suitable for silos, hoppers, bins and storage vessels
- Suitable for cement, fly ash, coal, grains, sugar, flour, plastic granules, chemicals, animal feed and other bulk solids




Rotating paddle level switch

For Solid Application Model: RPLS-600S

OPERATING PRINCIPLE:

The RPLS-600S Rotating Paddle Level Switch operates on the principle of rotational resistance. Under normal conditions, the sensing paddle rotates continuously. When the material reaches the paddle, the increased resistance stops its rotation. This movement actuates the internal switching mechanism and changes the 1 SPDT relay output, providing a reliable level indication. When the material level falls below the paddle, the resistance is removed, the paddle resumes rotation, and the relay returns to its normal condition.

PROBE CONSTRUCTION – COAT Guard FOR MATERIAL BUILD-UP

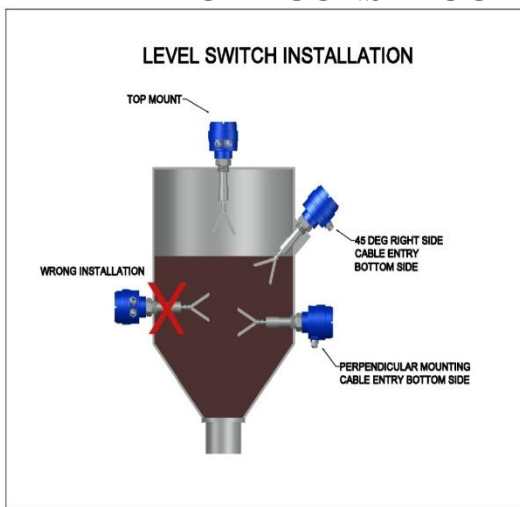



The RPLS-600S is designed with a robust sensing assembly to provide reliable level detection even in applications where material may accumulate around the sensing paddle. The COAT Guard construction helps minimize the effect of material build-up and supports consistent switching performance.

The rugged probe and paddle assembly provides high mechanical strength, reliable operation and long service life, making the RPLS-600S suitable for demanding bulk-solid applications where dust, powder and material accumulation may occur.

COMPONENTS OF LEVEL SWITCH ARE EXPLAINED IN FIGURE

ELECTRICAL CONNECTION SUPPLY: 230 VAC/110VAC/24 VDC

Integral Type

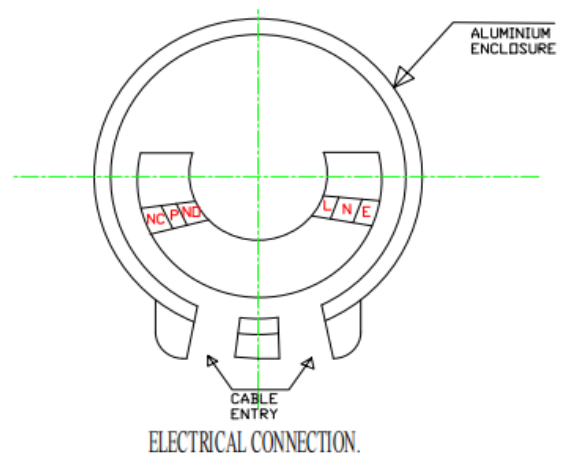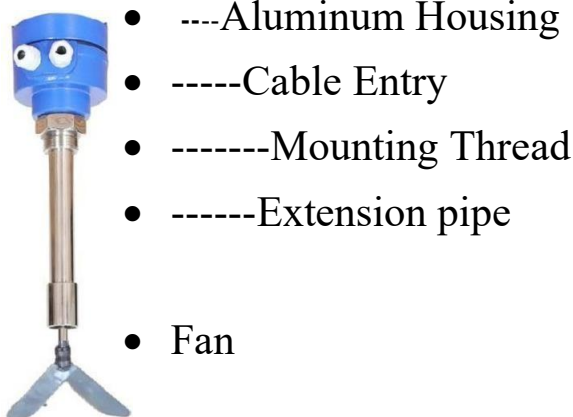

Rotating paddle level switch

For Solid Application Model: RPLS-600S


DATA SHEET

RPLS-600 – Rotating paddle Level Switch
 Selection / Ordering Information


Selection	Code	Description
Model No.	RPLS-600	Rotating paddle Level Switch
Application	S	Solids
Mounting Type	IN	Integral
Probe Type	RD / RP	Rigid pipe / Rope Flexible
Probe Diameter	D1 / D2	Standard 12 mm / Heavy Duty 40 mm
Probe Material	04 / 4L / 16 / 6L / MS / SM	SS304 / SS304L / SS316 / SS316L / Mild steel / Special material
Power Supply	AC / DC / A1	230VAC / 24VDC / 110VAC
Output	SP	SPDT Relay
Indication	L	LED
Enclosure	WP	Weatherproof
Connection	T	Threaded
	F	Flanged
Mounting	B1 / B2 / B3 / B4	1" / 1½" / 2" BSP / Special Mounting
	N1 N2 / N3 / N4	1" / 1½" / 2" NPT / Special Mounting
Flange Rating	A1 / A3 / A6	ANSI 150# / ANSI 300# / ANSI 600#
Flange Facing	RF / FF	Raised Face / Flat Face
MOC-Process Connection	S4 / S6 / S16 / MS / SL	SS304 / SS316 / SS316L / Mild steel / Special material
Flange Size	01 / 15 / 02 / 03 / 04 / PS	1" / 1½" / 2" / 3" / 4" / Special Process
Pressure	P1 / P2 / P3 / P4	Standard 0 to 2KG / 2 To 10kg / 10kg to 40kg / Customized
Temperature	T1 / T2 / T3 / TS	Max -20–150°C / 200°C / 350°C Customer Specified Special Designed
High Temperature stand off	H8 / H1 / H2 / H3 / HS	80MM / 150 MM / 200MM / 300 MM / Special standoff Extension
Cable Gland	G1 / G2 / G3 / G4	PG13.5 / ½"NPT / ¾" ET / PG16
Ground / Reference	GS / GX	Standard / Special
Paddle Type	L / CZ / T / 2V / 4V / J / SD	L Type / Cizer type / T type / 2 Vane / 4 vane / J Type / Customer Specified Special Designed
Material Certificate	M0 / MC	Not Required / Material test certificate
Test Certificate	TC / CC	Test Certificate / Calibration Certificate
Documentation	DS / GA / IR	Datasheet / GA / Inspection Report
Tagging	TAG	Customer Tag No.
Probe Length	XXXX	150mm TO Customized

Rotating paddle level switch For Solid Application Model: RPLS-600S

Mechanical Drawing: L Type Fan

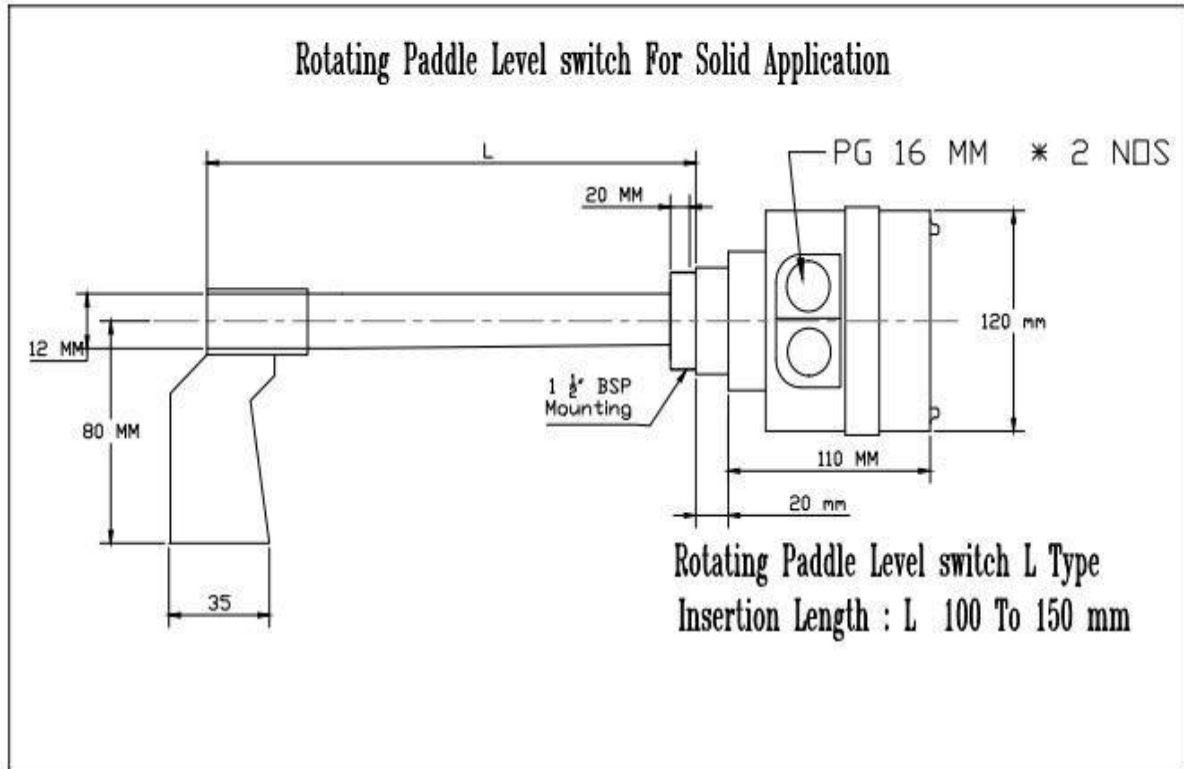


Mechanical Drawing: Cizer Type Fan

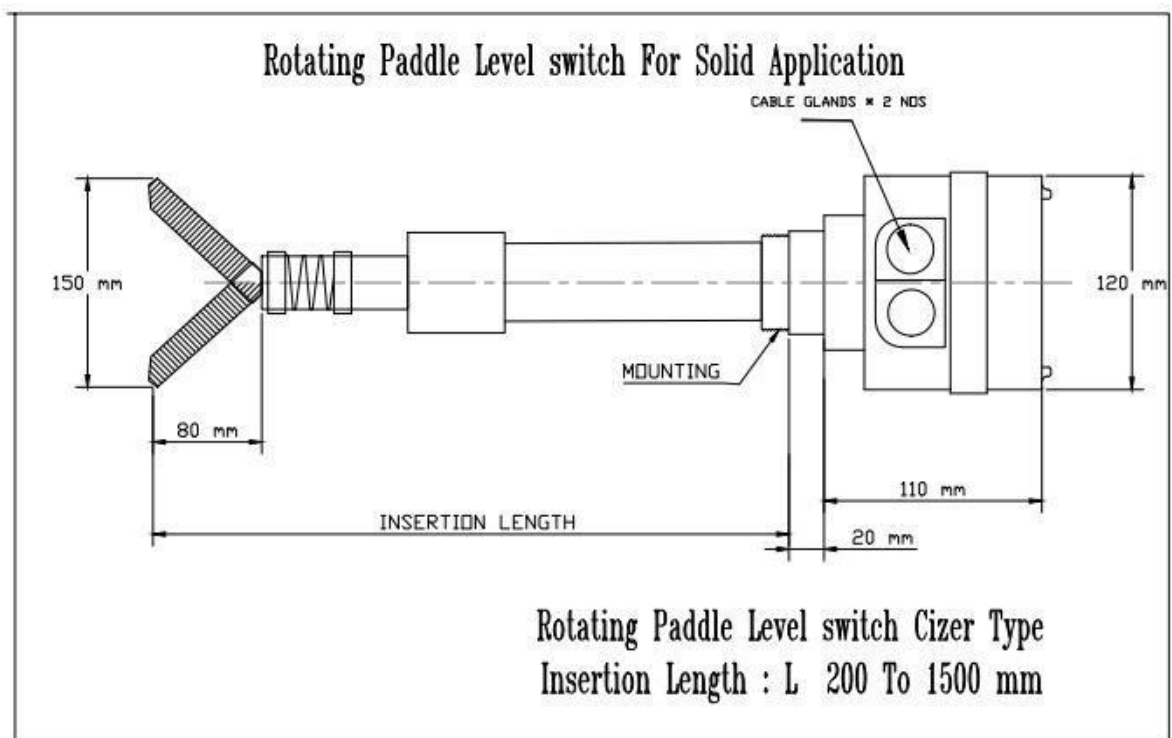


Rotating paddle level switch For Solid Application Model: RPLS-600S

Mechanical Drawing: 2 Vane Type Fan

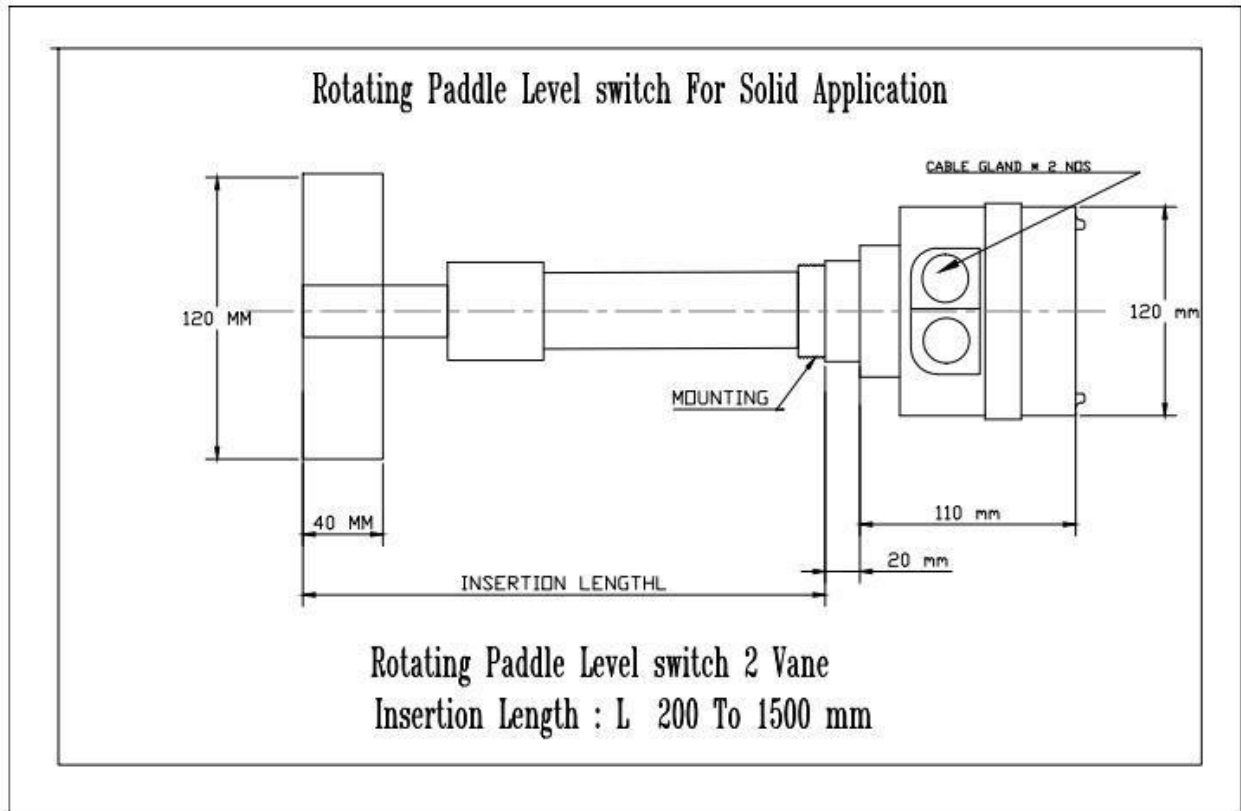


Mechanical Drawing: 4 Vane Type Fan

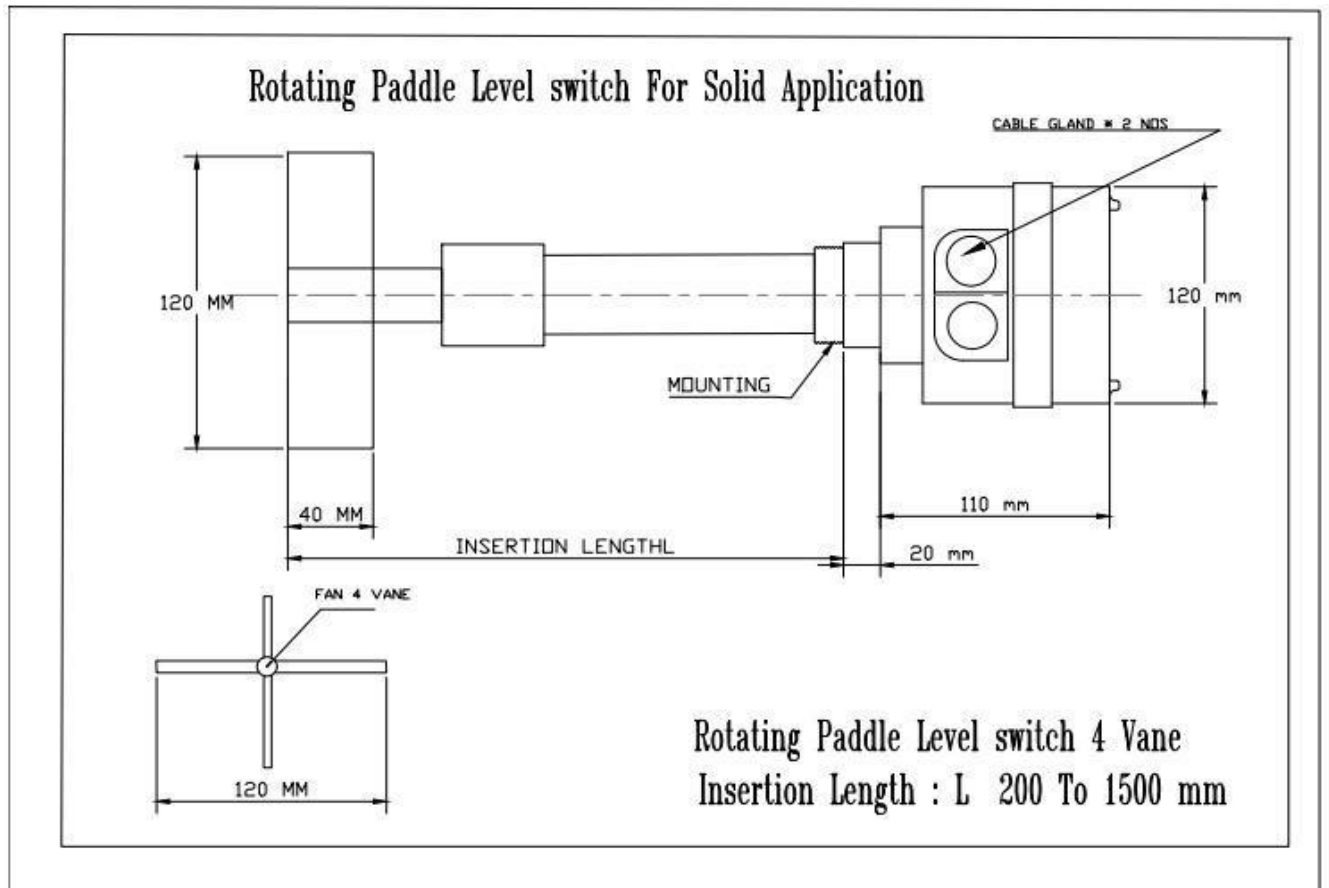

Rotating paddle level switch

For Solid Application Model: RPLS-600S

Mechanical Drawing: J Type Fan

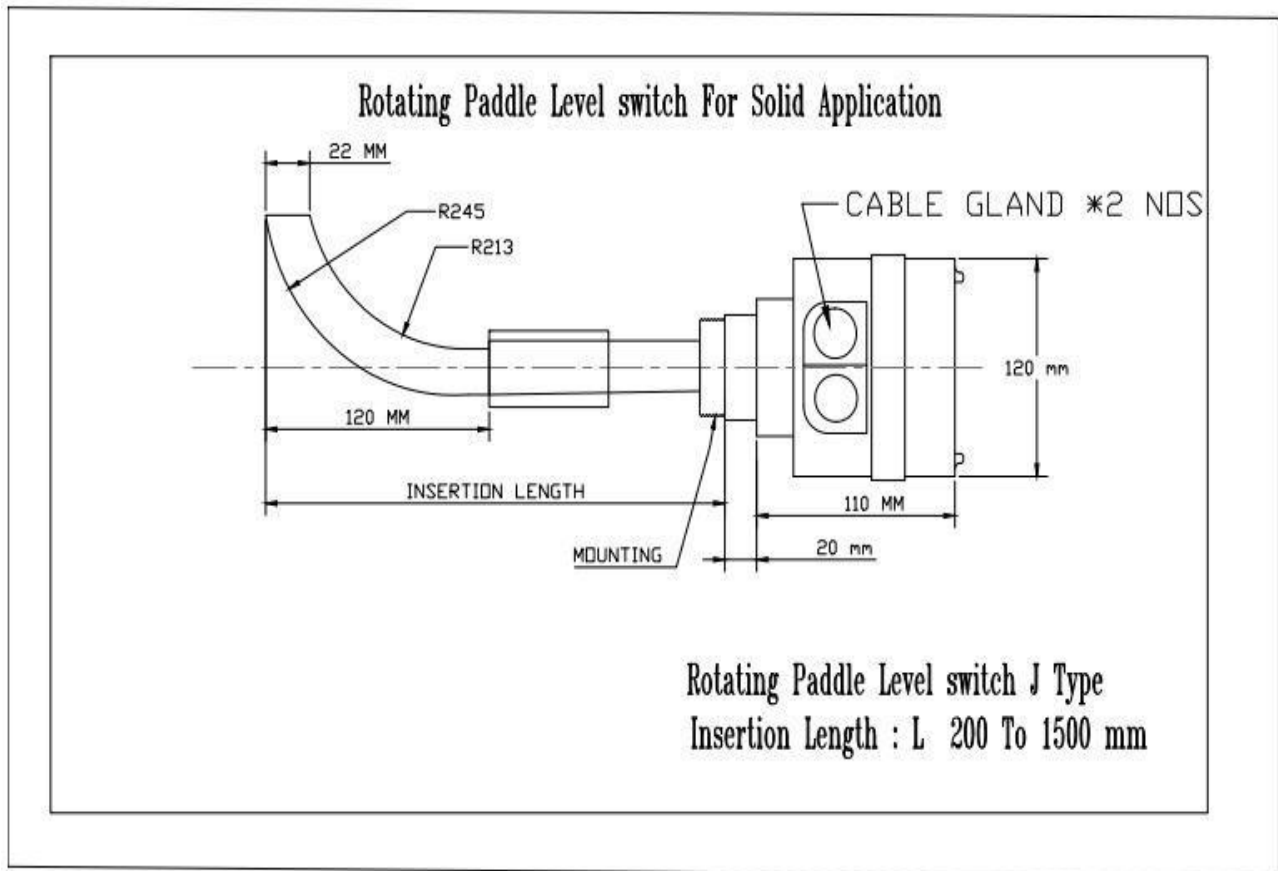

INFORMATION REQUIRED Before Purchase

- Process Parameters: Temperature, pressure,
- Requested mounting: Side/Tope?
- Application media: Size of lumps, free flowing or specify?
- Specific. Gravity.
- Supply Voltage, Probe length, Mounting etc.

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,

Contact: +91 9579430012/+91 9730042725, E-mail: sales@levtron.in

Web: www.Levtron.in/www.Levtroninstruments.com/www.levelsence.in