

SS Diaphragm Level Switch For Solid Application Model No-SDLS-1500S



PRODUCT DESCRIPTION:

SDLS-1500S Diaphragm Level Switch is designed for reliable point-level detection of dry, non-hazardous and free-flowing materials in bins, silos, hoppers and chutes. The unit operates by sensing the material pressure against a flexible diaphragm. When the material reaches the preset level, the diaphragm actuates a sensitive micro-switch, providing a reliable switching output. The output can be used for high- or low-level detection, process control, overflow prevention, material replenishment, or alarm indication. It's simple and rugged construction makes it suitable for continuous industrial level monitoring applications.

Typical Applications:

Dry powders, granules, pellets, grains, fertilizers, chemicals, plastics, cement, food products and other free-flowing bulk solids.

SALIENT FEATURES –:

- Reliable point-level detection in bins, silos, hoppers and chutes
- Rugged construction with a simple and reliable design
- Durable Cast Aluminium housing
- Stainless Steel (SS) construction available for demanding applications
- SS304 / SS316 material options available as per application requirements
- Corrosion-resistant protective paint finish
- Flexible and durable Silicone diaphragm
- Suitable for external mounting
- Designed for monitoring dry, free-flowing materials
- Helps prevent material overflow and maintain the required material level
- Detects overfilling and material plugging in chutes and conveyors
- Suitable for materials with density from 20 lb/ft³


APPLICATIONS

- Dry fertilizers, granular chemicals and powders
- Bentonite, potash, lime, gypsum and mineral powders
- Cement, limestone, fly ash and other dry bulk materials
- Plastic granules, resin pellets, regrind and rubber granules
- Coal, coke, carbon black and biomass materials
- Wood pellets, wood chips and sawdust
- Grains, seeds, sugar, salt, flour and food powders
- Animal feed and cattle feed
- Bins, silos, hoppers, chutes and conveyors
- Bucket elevators and material handling systems
- High-, low- and intermediate-level detection
- Overfill protection and chute blockage detection
- Material flow monitoring and replenishment control
- Suitable for dry, free-flowing, non-hazardous bulk solids

SS Diaphragm Level Switch For Solid Application Model No-SDLS-1500S

TECHNICAL SPECIFICATIONS	
Parameter	Specification
Model No.	SDLS-1500S
Type	SS Diaphragm Level Switch
Sensitivity	400 g – SS Diaphragm
Diaphragm Membrane Material	Stainless Steel
Ambient Temperature	Up to 150°C
Electrical Contacts	Micro Switch, 15 A, 230 VAC, Potential-Free Contact
Cable Gland	PG13 / PG16
Main Body	Cast Aluminium
Switching Housing	Cast Aluminium –
Protection Class	IP65

Drawings:

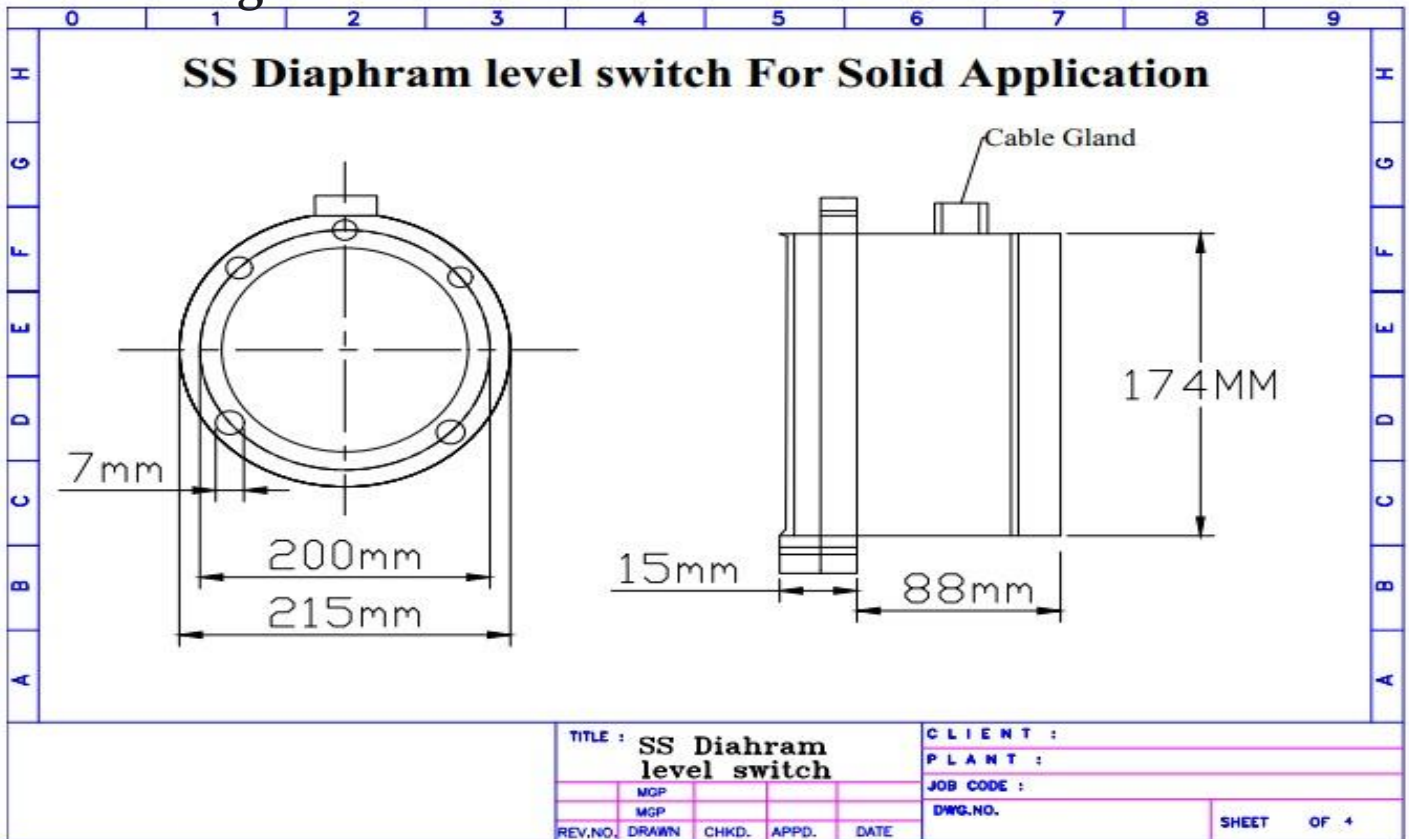

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune
411023, Contact: +91 9579430012/+91 9730042725, E-mail: sales@levtron.in
www.Levtron.in/ www.Levtroninstruments.com/www.levelsence.in