

Vibrating Fork Level Switch

For Solid Applications, Model: VFLS-200S

PRODUCT DESCRIPTION:



The VFLS-200S-SOLID VIBRATING FORK is specially designed for detecting minimum and maximum level in silo's filled with free-flowing solids, food grains, granules, powder s e t c. SOLIDFORK can be used for detecting the level of material having overall size less than 42 mm. Variation of electrical parameters of the service material such as conductivity and dielectric constant do not affect its operation. It can be used successfully for level detection of lumps, powders and granules of plastic, silica, sand, cement, chalk, pulverized coal, PET, Food grains, minerals, animal feed, Sugar & wood chips etc.

OPERATING PRINCIPLE:

The VFLS-200S Tuning Fork is kept vibrating at its mechanical resonant frequency by Piezo elements. When the service material covers the tines, it resists its movement and so the vibrations are damped. The stopped vibrations are sensed electrically and the signal is processed to signal an alarm and or control a relay. The relay contacts can be used to control the feed motor or evacuation valve etc.

SALIENT FEATURES:


- Piezoelectric Resonance Technology for reliable level detection
- Suitable for powders, granules and free-flowing solids
- No moving mechanical parts, ensuring long service life and minimum maintenance
- High sensitivity with fast and reliable response
- Easy installation and maintenance
- Compact, rugged and industrial-grade construction
- Fail-Safe High / Low selection, field configurable
- SS316 vibrating fork for excellent mechanical strength and corrosion resistance
- Suitable for Top and Side mounting
- Weatherproof / Flameproof enclosure as per application requirement
- LED indication for easy status monitoring
- Adjustable sensitivity for different material densities
- Optional PTFE / special coating for sticky or corrosive materials
- Reliable operation in demanding industrial applications
- No calibration required for normal installation
- Suitable for level detection in Silos, Hoppers, Bins and Tanks

Vibrating Fork Level Switch

For Solid Applications, Model: VFLS-200S



PROBE CONSTRUCTION – SUITABLE FOR MATERIAL BUILD-UP

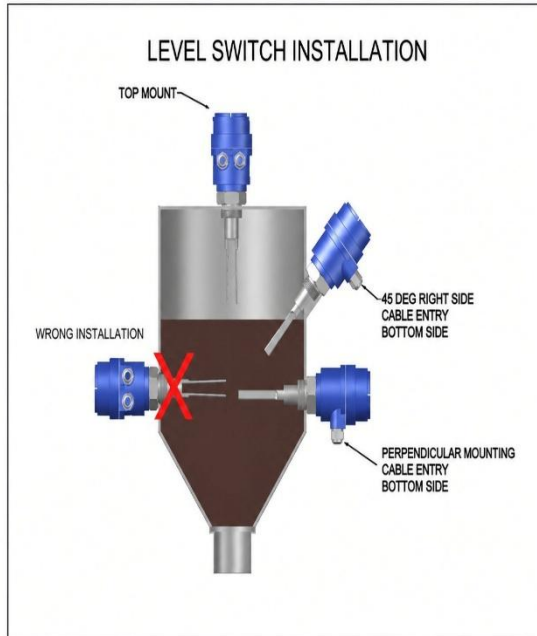

- Robust SS304 / SS316 vibrating fork construction for industrial applications.
- Specially designed fork profile for reliable level sensing.
- Smooth probe surface helps reduce material adhesion and build-up.
- Continuous vibration provides a self-cleaning effect and minimizes material accumulation.
- Suitable for powders, granules, sticky and coating-prone bulk solids.
- Heavy-duty construction for long service life and reliable operation.
- No moving mechanical parts, resulting in low maintenance and minimal wear.
- Probe length and process connection can be customized as per application requirements.

COMPONENTS OF COMPACT LEVEL SWITCH ARE EXPLAINED IN FIGURE




- ----Aluminum Housing
- -----Cable Entry
- -----Mounting Thread
- -----Extension pipe
- ----- Tuning Fork

ELECTRICAL CONNECTION

Universal /230 VAC/110VAC/24 VDC

ELECTRICAL CONNECTION- UNIVERSAL

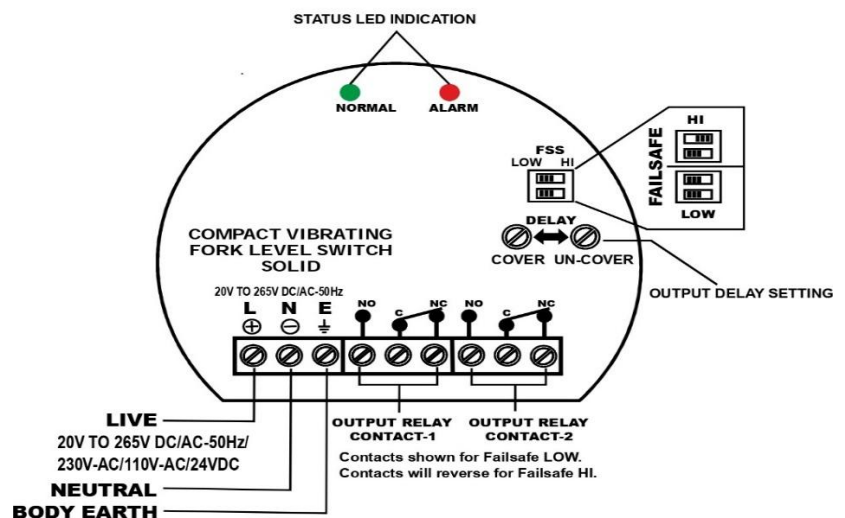

Vibrating Fork Level Switch

For Solid Applications, Model: VFLS-200S

DATA SHEET

VFLS-200 – Vibrating Fork Level Switch

Selection / Ordering Information

Selection	Code	Description
Model No.	VFLS-200	Vibrating Fork Level Switch
Application	S	Solids
Mounting Type	IN/RE	Integral / Remote
Probe Type	RD/ RP	Rigid Pipe / Flexible Tube
Insulation	N/P	Without Coating Standard / PTFE Coating
Probe Diameter	D1	Standard 42 MM
Fork Material	16/ SM	SS316L/ Special material
Power Supply	AC/DC/A1/UN	230VAC / 24VDC / 110VAC / Universal
Output	DP/SP/PN	DPDT Relay /SPDT Relay / PNP Relay
Switching Delay	ND / DA	No Delay / Adjustable
Indication	L / D	LED / Digital Display
Enclosure	WP / FL	Weatherproof / Flameproof
Connection	T	Threaded
	F	Flanged
Mounting	B1 / B2 / B3/B4	1" / 1½" / 2" BSP/ Special Mounting
	N1 / N2 / N3/N4	1" / 1½" / 2" NPT/ Special Mounting
Flange Rating	A1 / A3 / A6	ANSI 150# / ANSI 300# /ANSI 600#
Flange Facing	RF / FF	Raised Face / Flat Face
MOC-Process Connection	S4 / S6/ S16/MS/SL	SS304 / SS316/SS316L /Mild steel / Special material
Flange Size	01 / 15 / 02 / 03 / 04/PS	1" / 1½" / 2" / 3" / 4"/ Special Process
Pressure	P1 /CM	Standard 0 to 5KG/ Customized
Temperature	T1/ SD	Max -20–150°C /Specified Special Designed
High Temperature stand off	H8/H1	80MM/Special standoff Extension
Remote Cable	05 / SR	0 To 5 / Special Customer Requirement
Cable Gland	G1/ G2 / G3	PG13.5 / ½"NPT / ¾" ET/
Material Certificate	M0 / MC	Not Required / Material test certificate
Test Certificate	TC / CC	Test Certificate / Calibration Certificate
Documentation	DS / GA / IR	Datasheet / GA / Inspection Report
Tagging	TAG	Customer Tag No.
Probe Length	XXXX	200 mm To Customize

Vibrating Fork Level Switch


For Solid Applications, Model: VFLS-200S

INFORMATION REQUIRED Before Purchase

Process Parameters: Process Connection, Process Temperature, Vessel pressure if any.

- Application media characteristics: Density, Viscosity, Sp. Gr.
- Supply Voltage, Probe length, Mounting etc.

Mechanical Drawing:

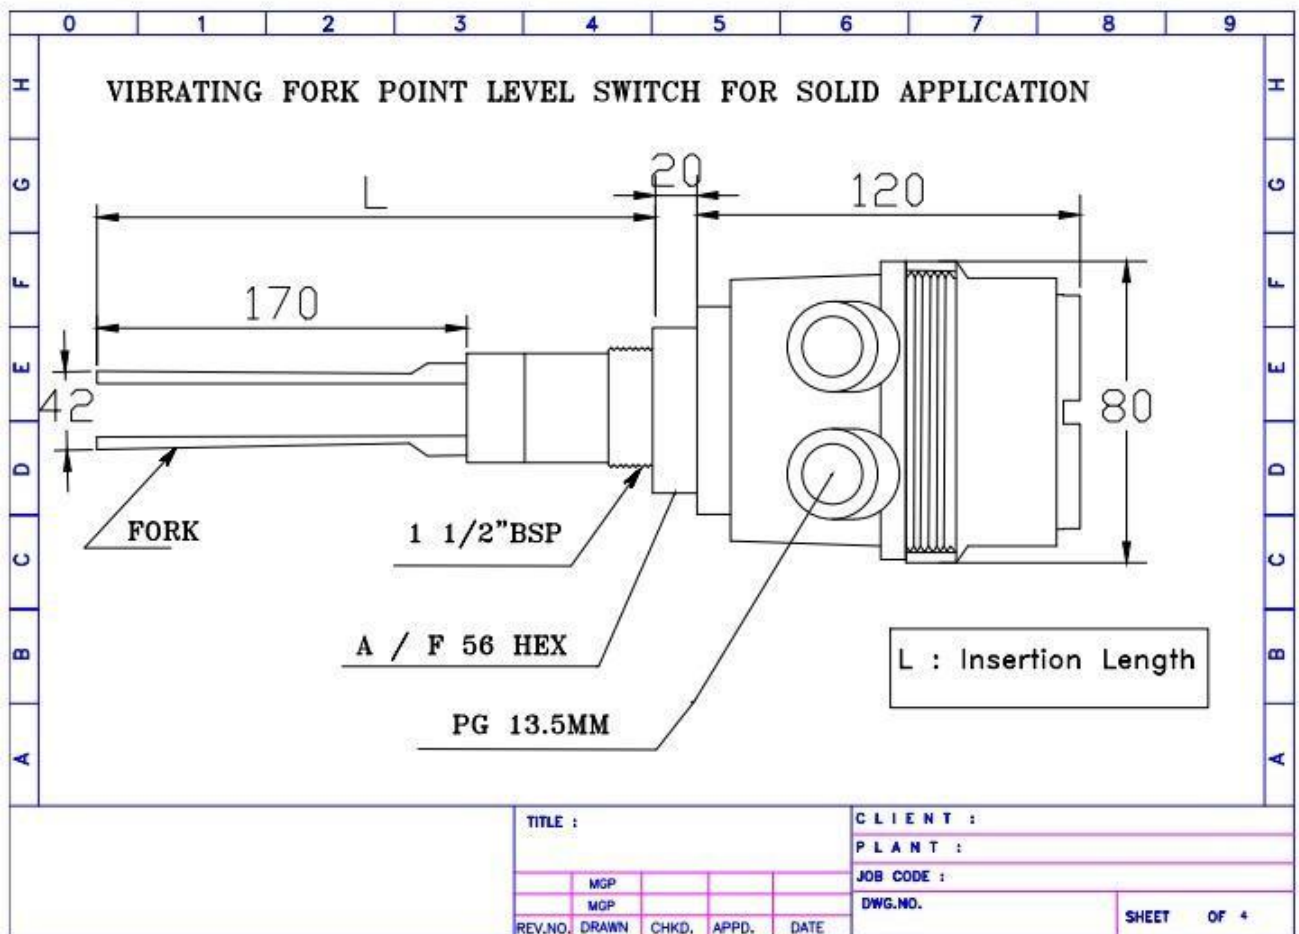

Manufactured By:

Levtron Instruments Pvt Ltd.

Office No 2, 1st floor, plot no 6, Pandhari Industrial estate, Shivane. Pune 411023,

Contact: +91 9579430012/+91 9730042725, E-mail: sales@levtron.in

Web: www.Levtron.in/www.Levtroninstruments.com/www.levelsence.in