

Cisco Packet Tracer

File Edit Options View Tools Extensions

Logical Physical x: 683, y: 55

Time: 00:07:44

32°C Sunny

Physical Config GUI Attributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

Internet

LAN

Wireless

Wireless Settings

SSID Smart

2.4 GHz Channel 6 - 2.437GHz

Coverage Range (meters) 250.00

Authentication

☐ Disabled ☐ WEP WEP Key

☐ WPA-PSK ☒ WPA2-PSK PSK Pass Phrase 12345

☐ WPA ☐ WPA2

RADIUS Server Settings

IP Address

Shared Secret

Encryption Type AES

Top

Realtime Simulation

11:09 14-09-2022

Cisco Packet Tracer

File Edit Options View Tools Extensions Help

Logical Physical x: 1910, y: 178

Time: 00:24:00

32°C Sunny

Tablet PC0

Physical Config Desktop Programming Attributes

IoT Monitor

IoT Server - Devices Home | Conditions | Editor | Log Out

IoT3 (PTT0810OITK-)	Ceiling Fan
IoT1 (PTT0810JH39-)	Light
IoT5 (PTT0810OGT8-)	Door

11:25 14-09-2022

Cisco Packet Tracer

File Edit Options View Tools Extensions

Logical Physical x: 530, y: 308

Time: 00:24:13

32°C Sunny

Specifications I/O Config Physical Config Thing Editor Programming Attributes

Network Adapter PT-IOT-NM-1CFE

Network Adapter 2

Digital Slots

Analog Slots

USB Ports 0

Bluetooth

Desktop

Usage

☐ Built-in

☐ Show


☒ Smart Device ☐ Component

☐ Top Advanced

Realtime Simulation

12:11:30

11:25 14-09-2022

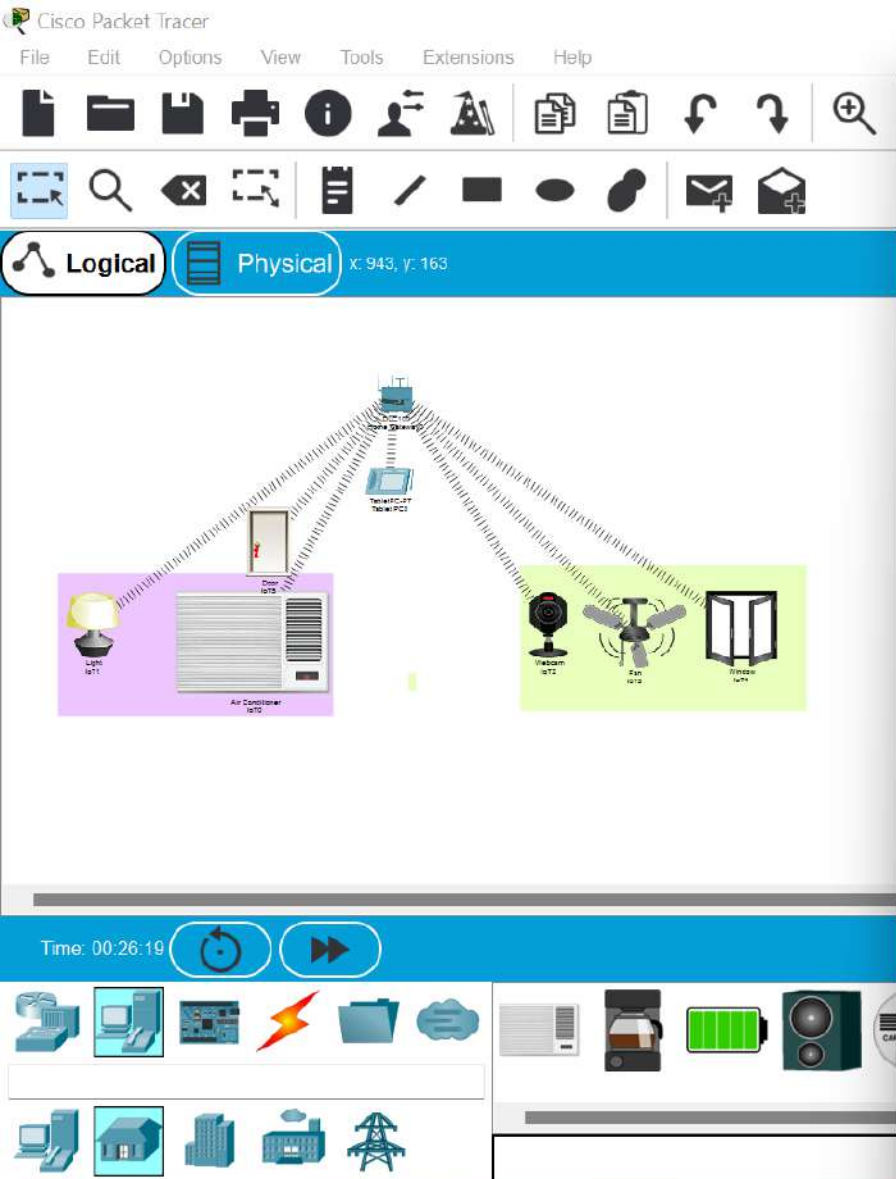

Tablet PC0

Physical Config **Desktop** Programming Attributes

IoT Monitor x

IoT Server - Devices Home | [Conditions](#) | [Editor](#) | [Log Out](#)

IoT3 (PTT0810OITK-)	Ceiling Fan
Status	<input type="button" value="Off"/> <input type="button" value="Low"/> <input checked="" type="button" value="High"/>
IoT1 (PTT0810JH39-)	Light
Status	<input type="button" value="Off"/> <input type="button" value="Dim"/> <input checked="" type="button" value="On"/>
IoT5 (PTT0810OGT8-)	Door
Open	<input checked="" type="radio"/>
Lock	<input type="button" value="Unlock"/> <input checked="" type="button" value="Lock"/>
IoT0 (PTT081074N8-)	AC
On	<input checked="" type="checkbox"/>