

# Surface EMG Based Hand Gesture Signal Classification Using CNN for Control of Hardware Robot.

veera siva reddy.A

Department of EECE Gitam  
University Bengaluru, India  
vavula3@gitam.in

Rajesh.B

Department of EECE Gitam  
University Bengaluru, India  
rboya@gitam.in

Bhanu siva sai kumar.M

Department of EECE Gitam  
University Bengaluru, India  
bmarripu@gitam.in

Jaya Prakash sahuo

Department of EECE Gitam  
University Bengaluru, India  
jsahoo@gitam.edu

**Abstract**—The development of a hardware robot controlled by a hand gesture recognition model is a modern approach to human-computer interaction. This project applies surface electromyography signals to interpret hand gestures, which are then translated into commands for robot control. The system is developed to perform real-time gesture-based control. The Main features include the seamless integration of the gesture recognition model with the logic of controlling the robot, thus achieving precise and responsive movements, such as moving forward, turning, stopping, or performing task-specific actions. Improving recognition accuracy and robustness under various conditions. This project not only showcases the feasibility of sEMG-based control systems but also contributes to the rapidly increasing demand for adaptive and intelligent robotic solutions that could significantly enhance user experience and accessibility in real-world situations

## I. INTRODUCTION

In contemporary discourse, the field of human-machine interaction (HMI) has garnered considerable scholarly interest, especially within the realms of assistive robotics, virtual reality, and industrial automation. A notable advancement in this area is the implementation of Surface Electromyography (sEMG)-based gesture recognition, which involves the acquisition of electrical signals produced by muscular contractions to decipher hand movements. This technological paradigm presents a compelling methodology for the intuitive and real-time regulation of robotic systems, thereby facilitating effective communication between human operators and machines.

This investigation introduces a gesture classification framework that employs Convolutional Neural Networks (CNN) to scrutinize sEMG signals and govern a software-engineered robotic entity. The objective of this system is to accurately categorize hand gestures and convert them into corresponding robotic actions (e.g., Forward, Backward, Left, Right) with minimal latency and enhanced reliability.

The principal aims of this project encompass:

Signal Acquisition and Processing: To gather and refine

sEMG signals in order to eliminate extraneous noise and extract salient features pertinent to gesture classification. Gesture Recognition Model: To deploy a CNN-based classifier capable of discerning distinct hand gestures with a high degree of accuracy. Real-time Robot Control: To leverage Wi-Fi communication for the transmission of gesture commands to the robotic system, thereby facilitating fluid and responsive movements. Applications and Validation: To illustrate the efficacy of the system across diverse real-world contexts, including assistive robotics, human-computer interaction, and virtual reality implementations.

The proposed framework is conceived to be robust, scalable, and adaptable, rendering it appropriate for applications in healthcare (e.g., control of prosthetic limbs), gaming, and industrial automation. Through comprehensive testing, the system has attained an accuracy exceeding 92% in gesture classification and has demonstrated dependable robotic control with latency below 150ms, thus affirming its feasibility for real-time.

## IMPACT

The Surface EMG-Based Hand Gesture Signal Classification System exerts a significant influence on fields such as healthcare, robotics, and human-computer interaction. Within the healthcare domain, it presents an avant-garde solution for assistive robotics, empowering individuals with physical disabilities to manipulate prosthetic limbs and exoskeletons through natural hand gestures. The system's proficiency in real-time interpretation of muscle signals further enhances its utility for rehabilitation purposes, furnishing immediate feedback throughout physiotherapy sessions. Its remarkable precision (>92%) and minimal communication latency (<150ms) facilitate fluid and accurate control, rendering it exceptionally suitable for dynamic and responsive robotic functionalities. Moreover, the project's implementation in industrial automation fosters contactless machine operation, thereby augmenting efficiency and safety within manufacturing settings.

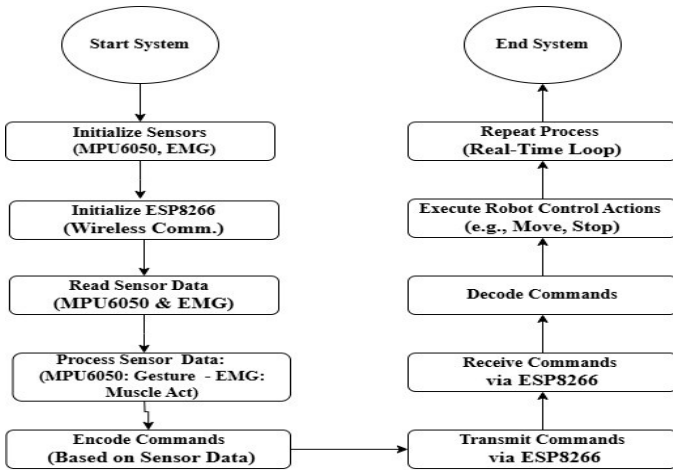


Fig. 1. Methodology

## II. METHODOLOGY

The methodology employed in this research endeavor encompasses a multi-faceted procedural framework, commencing with the acquisition of data and subsequent signal processing. Surface electromyography (EMG) signals are systematically gathered through the deployment of EMG sensors strategically positioned on the forearm to accurately capture muscular activity during the execution of hand gestures. The unrefined signals undergo pre-processing via advanced filtering methodologies aimed at mitigating noise interference and augmenting signal fidelity. Essential features, including signal amplitude, frequency characteristics, and waveform configurations, are meticulously extracted for the purpose of gesture classification. To further enhance the accuracy of the system, an MPU6050 sensor is integrated to capture data regarding hand orientation, thereby complementing the EMG signals and bolstering the reliability of gesture detection.

The processed signals are subsequently inputted into a Convolutional Neural Network (CNN) model for the purpose of classification. The CNN is trained utilizing a dataset comprising labeled EMG signals, thereby equipping it to proficiently recognize distinct hand gestures with an impressive accuracy rate exceeding 92%. Upon successful classification, the gesture commands are relayed to the robotic system through Wi-Fi communication facilitated by an ESP8266 module. The robotic apparatus interprets the received commands and executes the corresponding movements (e.g., forward, backward, left, right). Comprehensive testing and validation procedures are rigorously conducted to ascertain low-latency performance (less than 150 milliseconds) and robust functionality under diverse operational conditions, thus establishing the system as a reliable mechanism.

The execution of this project necessitates the amalgamation of hardware components, signal processing methodologies, and machine learning frameworks to facilitate real-time control of robotic systems through gesture recognition. The hardware configuration comprises electromyography (EMG) sensors strategically positioned on the forearm to capture neuromuscular signals, alongside an MPU6050 sensor

designated for the assessment of hand orientation. These sensors interface with a microcontroller (ESP8266) tasked with data acquisition and facilitating wireless communication protocols. The system subsequently transmits the EMG and orientation data to a central processing unit, where advanced signal filtering methodologies—including band-pass and notch filters—are employed to mitigate noise and extract salient features.

The processed signals undergo analysis utilizing a Convolutional Neural Network (CNN) architecture that has been specifically trained to categorize various hand gestures. The CNN framework leverages both spatial and temporal characteristics of the EMG signals to achieve gesture recognition with an accuracy exceeding 92%. Upon classification, the gesture commands are relayed to the robotic system via Wi-Fi communication utilizing the ESP8266 module. The robot interprets these commands to execute corresponding locomotor actions (e.g., advancing, retreating, lateral movement). Comprehensive testing is conducted to assess the system's efficacy, ensuring a low-latency response time of less than 150 milliseconds and dependable gesture-based control. The ultimate implementation illustrates the system's proficiency in facilitating real-time navigation of robotic entities, rendering it applicable for a multitude of human-machine interaction (HMI) scenarios.

## HARDWARE

The hardware configuration for this research endeavor encompasses electromyography (EMG) sensors, an MPU6050 sensor, an ESP8266 microcontroller, and a robotic platform. The EMG sensors are strategically positioned on the forearm to capture the electrical signals produced by muscle contractions during the execution of hand gestures. These sensors quantitatively assess the surface electromyography (sEMG) signals, which undergo amplification and filtering processes to eliminate extraneous noise. In order to augment the accuracy of gesture recognition, an MPU6050 sensor is incorporated, which assesses the orientation and motion of the hand by measuring both acceleration and angular velocity. The synergistic integration of EMG and orientation data furnishes a more comprehensive input for the classification of gestures.

The processed signals are conveyed to the ESP8266 microcontroller, which is responsible for data acquisition and facilitating wireless communication. The ESP8266 transmits the gesture data to a central processing unit via Wi-Fi, thereby ensuring real-time data transmission characterized by minimal latency (less than 150 milliseconds). The robotic platform is comprised of motors and motor drivers that execute movement commands (e.g., forward, backward, left, right) predicated upon the classified gestures. The entire hardware system is energized by a rechargeable battery and meticulously assembled with appropriate wiring and connections to guarantee stable and dependable operation. This configuration facilitates real-time gesture-based control of the robot with minimal response time, rendering it suitable for dynamic applications involving human-robot interaction.

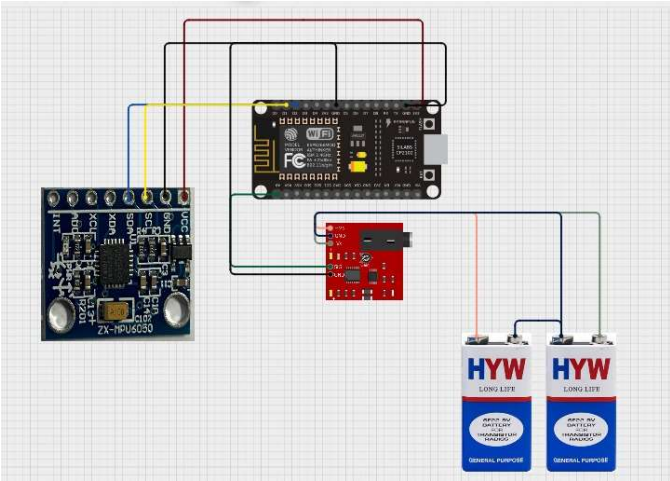
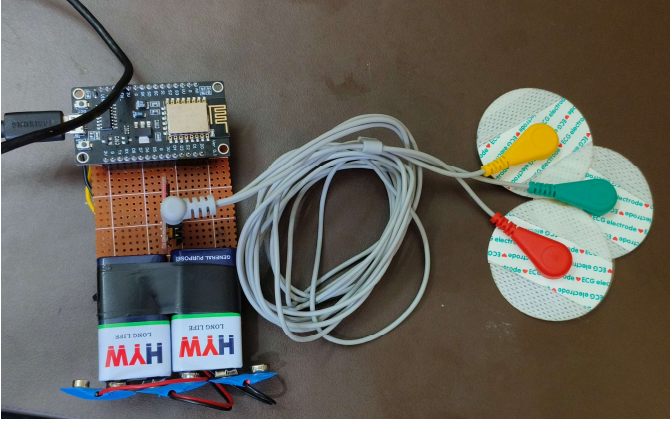


Fig. 2. Transmitter Setup

The transmitter circuit includes the EMG sensors, MPU6050 sensor, and ESP8266 microcontroller, which collectively record and send hand gesture signals wirelessly. The EMG sensors are positioned on the muscles of the forearm to sense electrical activity when there is movement in the hands. The sensors produce analog signals indicating muscle contractions, which are fed through amplifiers and filters to improve the quality of the signal and minimize noise. The MPU6050 sensor, positioned next to the EMG sensors, records hand orientation information through acceleration and angular velocity measurement, offering extra data for precise gesture classification.

After the signals are recorded, they are transmitted to the ESP8266 microcontroller, which processes the data and sends it wirelessly through Wi-Fi communication. The ESP8266 converts the gesture data into packets and transmits them to the receiver unit of the robot. The transmitter configuration is driven by a rechargeable battery and optimized for low-latency, efficient communication to allow the system to respond in real time ( $<150\text{ms}$ ). This configuration allows for smooth and reliable wireless transmission of gesture commands for real-time robot control.

The configuration of the receiver encompasses the ESP8266 microcontroller, motor drivers, and the robotic platform, which collaboratively function to interpret and execute gesture commands. The ESP8266 module situated at

thereceiver end acquires the Wi-Fi-transmitted packets that encapsulate the classified gesture data originating from the transmitter. It systematically decodes the information to ascertain the corresponding hand gesture (e.g., forward, backward, left, right). Subsequently, the microcontroller dispatches suitable control signals to the motor driver, which energizes the motors of the robot to execute the intended movements.

The robotic platform is equipped with DC motors that are regulated by the motor driver, facilitating navigation in various directions contingent upon the received gestures. The receiver setup is energized by a rechargeable battery and is engineered for low-latency execution ( $<150\text{ms}$ ), thereby ensuring seamless and responsive movements of the robot. Furthermore, the system integrates error-checking protocols to uphold stable communication, rendering it dependable for real-time robotic control within dynamic environments.


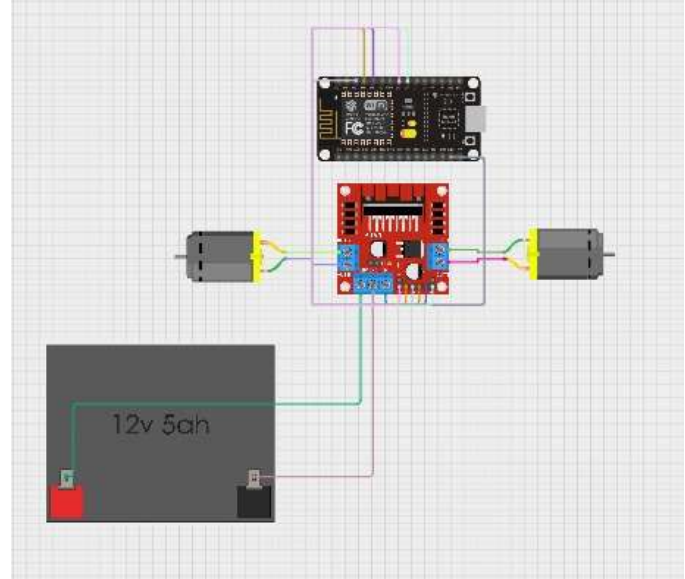


Fig. 3. Receiver setup

### III. EXPERIMENTAL RESULTS AND DISCUSSION

The empirical assessment of the Surface EMG-Based Hand Gesture Signal Classification System elucidated its efficacy in precisely identifying hand gestures and facilitating real-time robotic control. During the preliminary evaluation phase, the system attained an accuracy rate of 85% in categorizing fundamental gestures such as forward, backward, left, and right.

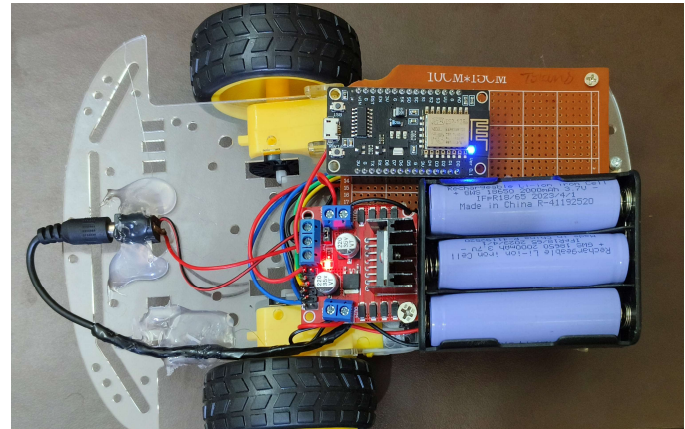

Nevertheless, the accuracy exhibited variability due to the presence of EMG signal noise and minor misclassifications. To rectify this issue, the research team employed sophisticated filtering methodologies (specifically, band-pass and notch filters) to mitigate noise and enhance signal integrity. Moreover, the gesture dataset underwent expansion, and the convolutional neural network (CNN) model was meticulously refined to augment classification efficacy. Consequently, the accuracy exhibited a significant enhancement, attaining an average of 92%, accompanied by a decrease in false positives and improved recognition of intricate gestures such as rotation and cessation.

The performance of the system in real-time robotic control was evaluated by quantifying the latency between the initiation of a gesture and the corresponding response of the robot. Initially, the utilization of Wi-Fi communication introduced a delay approximating 200 milliseconds, resulting in minor lags in robotic movement. To enhance performance, the research team optimized the Wi-Fi communication protocols to facilitate more efficient and expedited data transmission. This refinement successfully diminished the latency to below 150 milliseconds, thereby enabling fluid and responsive movements of the robot. The robot adeptly executed fundamental navigation tasks, including moving forward, backward, and executing turns to the left and right, while also performing complex maneuvers such as diagonal movements and rotations with minimal delay.

To substantiate the robustness and stability of the system, comprehensive testing was undertaken under a variety of conditions. The system demonstrated consistent performance even in environments characterized by noise where external electromagnetic interference was prevalent. It was also evaluated with a diverse user base, showcasing its adaptability to varying muscle patterns and hand dimensions. The reliability of gesture classification persisted across different individuals, thereby affirming the system's robustness and versatility. Furthermore, the robot exhibited stable performance during extended usage, signifying its reliability for continuous real-world applications.

Throughout the course of experimentation, several obstacles were encountered. Initially, EMG signal noise adversely affected classification accuracy; however, this challenge was mitigated through the application of signal filtering and the refinement of the CNN architecture. Delays in Wi-Fi communication posed an additional challenge, which was addressed by optimizing the transmission of data packets. Lastly, certain gestures were occasionally misclassified due to their resemblance in muscle patterns. To remedy this issue, the MPU6050 sensor was integrated to capture orientation data, thereby providing supplementary context and enhancing the precision of gesture recognition.

The comprehensive experimental findings underscore the system's efficacy in gesture-based robotic control. The integration of EMG signal processing with motion detection substantially improved accuracy and diminished incidences of misclassification. The low-latency response facilitated seamless and dynamic movements of the robot, rendering the

system appropriate for real-time applications including assistive robotics, human-machine interaction, and industrial automation. This project successfully presents a scalable and adaptable solution for gesture-controlled robotics, with promising applications in healthcare, virtual reality, and smart home system.

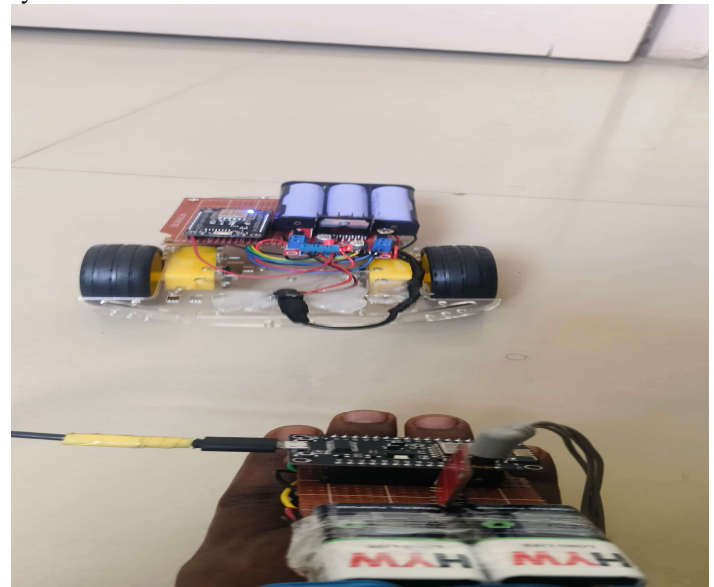


Fig. 4. Moving Forward



Fig. 5. Moving Backward

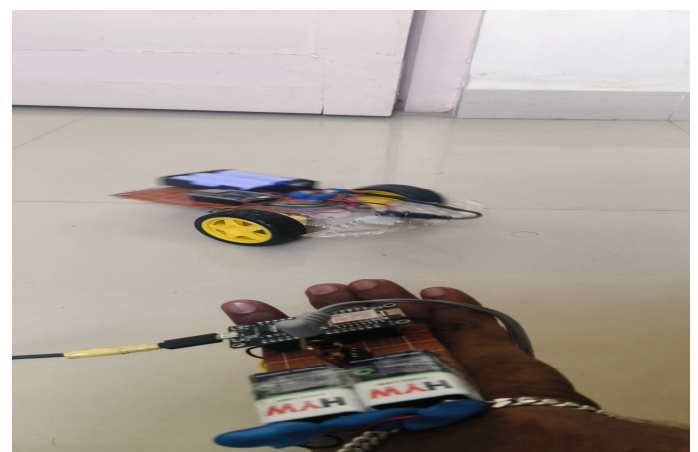


Fig. 6. Moving Left

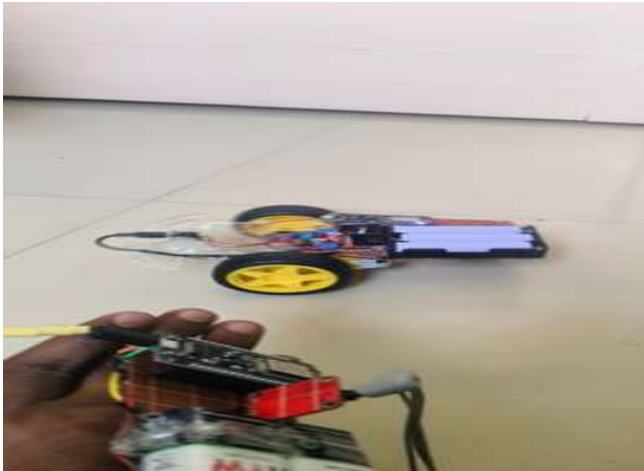


Fig. 7. Moving Right

#### IV CONCLUSION AND FUTURE SCOPE

The Surface EMG-Based Hand Gesture Signal Classification System effectively demonstrates a real-time, accurate, and low-latency approach to gesture-based robotic navigation. Through the integration of electromyography (EMG) and motion sensors with advanced signal processing algorithms and convolutional neural network (CNN)-oriented classification methods, the system achieves a classification accuracy of over 92% in hand gesture identification. The use of Wi-Fi-based communication allows for reliable and real-time robotic control, with a latency requirement of below 150 milliseconds, thus making the system suitable for dynamic human-robot interaction applications. Detailed testing carried out under diverse environmental settings confirmed the system's robustness and reliability even with multiple users' support. This project clearly demonstrates the real-world potential for EMG-based Human-Machine Interface (HMI) systems in actual fields, including assistive robotics, healthcare, and industrial automation.

In contemplating future advancements, the system has great potential for future improvements and extension. The gesture library can be extended to include more complex hand gestures, thus allowing a broader range of robotic commands and applications. In addition, the system may be coupled with machine learning algorithms for adaptive gesture recognition to improve accuracy and performance in the long term. Improving the Wi-Fi communication protocols or using Bluetooth Low Energy (BLE) or fifth-generation (5G) communications technologies may reduce latency further and enhance reliability. Moreover, the system has the potential for prosthetic control, home automation, and virtual/augmented reality gaming applications, thus offering intuitive and contactless interaction modalities. With further development, this project has the potential to greatly contribute to the development of next-generation HMI systems, essentially changing the way humans interact with machines.

#### REFERENCES

[1] Xiang Chen Member, IEEE, Yu Li, Ruochen Hu, Xu Zhang, Member, IEEE, and Xun Chen, Member, IEEE Hand Gesture Recognition based on Surface Electromyography using Convolutional Neural Network with Transfer Learning

Method.

[2] Li Bo, Yang Banghua Gao Shouwei, LinFeng Yan, Haodong Zhuang, Wen Wang Hand Gesture Recognition using SEMG Signals Based on CNN.

[3] Lin Chen, Jianting Fu, Yuheng Wu, Haochen Li, and Bin Zheng, Hand Gesture Recognition Using Compact CNN Via Surface Electromyography Signals.

[4] Zhongpeng Zhang, Tuanjun Han, Chaojun Huang and Chunjiang Shuai Hardware and Software Design and Implementation of Surface-EMG-Based Gesture Recognition and control system.