

LAB ROUTER CONFIGURATION

Router IP Configuration:

Configure IP : 50.0.0.1

The image shows a network diagram and a terminal window. The diagram, titled 'SUREN NETWORK PLAY WITH TECHNOLOGIES', illustrates a connection between a 'ROUTER' and a 'Win' PC. The router's e0/0 interface is labeled with IP '50.0.0.1', and the PC's e0 interface is labeled with IP '50.0.0.10'. A red label 'SSH - TELNET' is placed above the connection line. Below the diagram, a terminal window titled 'ROUTER' displays the following configuration commands and status messages:

```
*Aug 21 05:10:07.511: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to do
wn
*Aug 21 05:10:07.516: %LINK-3-UPDOWN: Interface Ethernet0/2, changed state to do
wn
*Aug 21 05:10:07.521: %LINK-3-UPDOWN: Interface Ethernet0/3, changed state to do
wn
*Aug 21 05:10:08.511: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to down
*Aug 21 05:10:08.520: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to down
*Aug 21 05:10:08.524: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
3, changed state to down
ROUTER#ena
ROUTER#enable
ROUTER#conf t
ROUTER#conf terminal
Enter configuration commands, one per line. End with CNTRL/Z.
ROUTER(config)#interface ethernet0/0
ROUTER(config-if)#ip address 50.0.0.1 255.0.0.0
ROUTER(config-if)#no shutdown
ROUTER(config-if)#exit
ROUTER(config)#
```

Verify configured IP and e/0 port status.


```
ROUTER#show ip int brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	50.0.0.1	YES	manual	up	up
Ethernet0/1	unassigned	YES	TFTP	down	down
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down


```
ROUTER#
```

Configure IP in PC


IP Add : 50.0.0.10

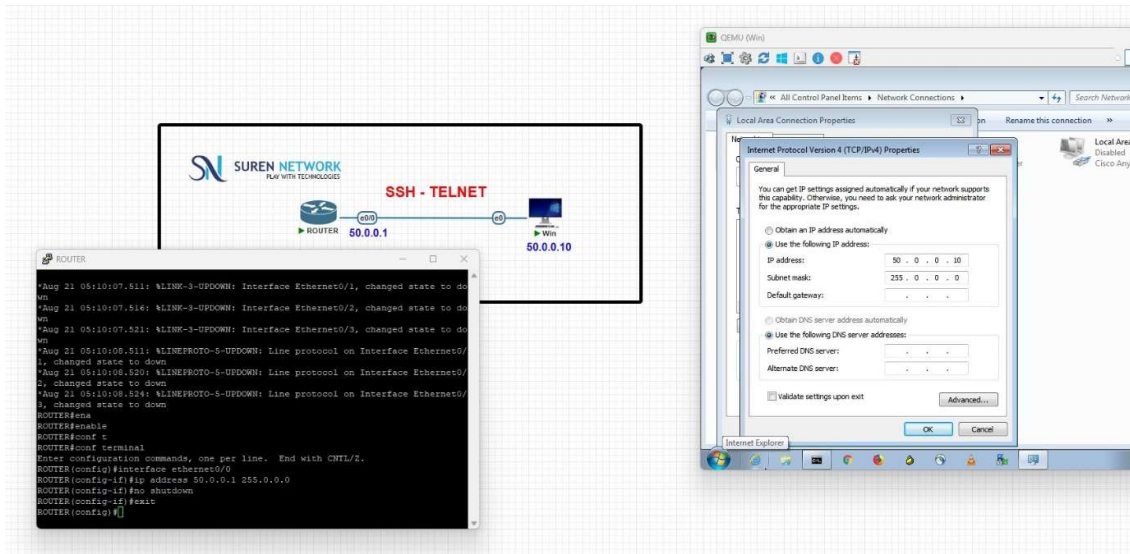

Check Router reachability from PC

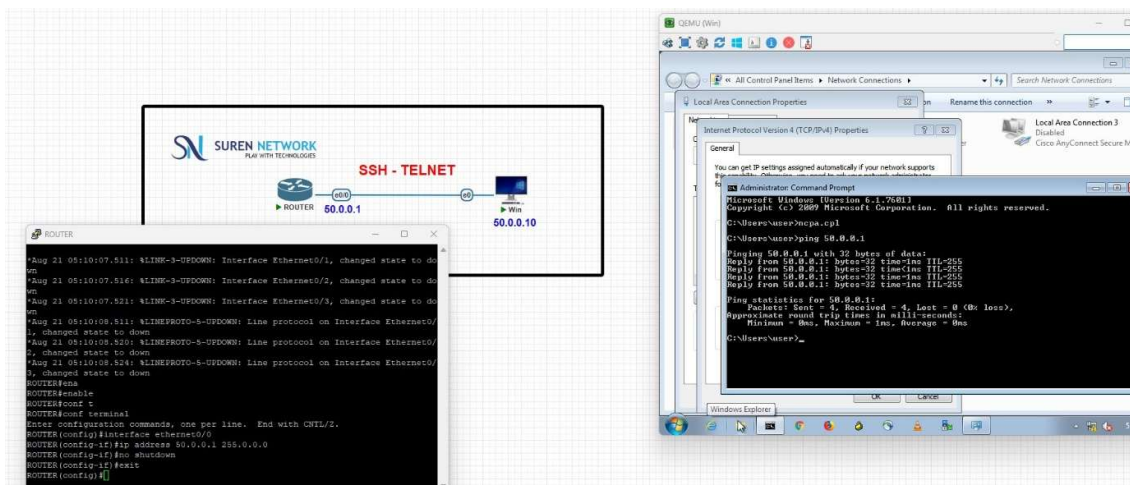

Configure telnet in Router

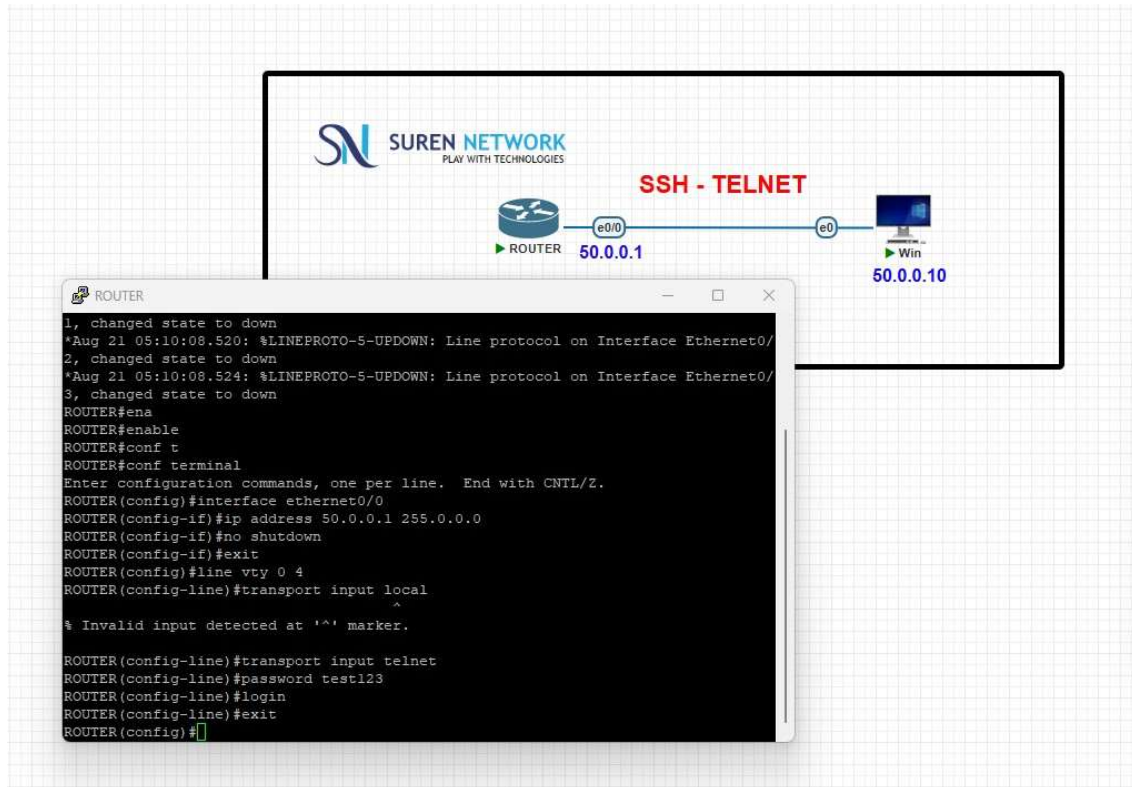

Check the router remote access from PC with assigned password

