ELECTRIC LOCOMOTIVE WAG-9H

WAG-9H is a Broad Gauge developed by Chittaranjan Locomotive Works by modifying the weight of WAG-9 freight loco therefore Starting Tractive effort increased from 46.9 T 50.9T . WAG-9H is capable of hauling Freight trains at speed up to 100 Kmph and now largely used by Zonal Railways in freight application. All the locomotive is fitted with AAR tight lock couplers and chain link couplers. Banaras Locomotive Works (BLW) Varanasi started manufacturing WAG-9H class locomotive in FY 2018-19. BLW first built Freight loco was WAG-9H-41000 manufactured in Jan 18 and dispatched to GOMO Shed. Now, WAG9H loco is manufactured with bogie (without TBU), being fitted in WAP7, designated as WAG9HC.

Electric Engine

- Electric System - 25 KV, 50Hz. Single Phase AC Overhead
- Transformer - 6531 kVA Oil Cooled Air Forced, Primary 25 KV, Secondary: Traction 1269 V, Aux. 1000V, Filter 1154 V
- Tractive Effort (Tonne) - Starting 50.97 T, Continuous 23.13 T

Brakes

- Brake System - E-70 (Faiveley make)
- Computer Controlled Brake (Knorr Bremse make)

Transmission

- Power - 6000 HP on wheels
- Traction Convertor - 2 x 3000 KVA, O/P voltage: 3 Phase 0-150 Hz., 2180V, water cooled (water mixed with ethylene glycol)
- Gear Ratio 21:107

Truck

- Bogies - CO-CO, Fabricated Flexi Coil wheel base 3700 mm.

General Characteristics	
Electrical System	25 KV, 50Hz., Single Phase AC Overhead
Power	6000 HP on wheels
Tractive Effort (Tonne)	Starting 50.97 T, Continuous 23.13 T
Loco Weight	132 T(+/-1%)
Speed	100 Kmph
Axle Load	22.0 T
Length over headstocks	19280 mm.
Body Width	3152 mm.
Pantograph lock down height	4255 mm.
Bogies	CO-CO, Fabricated Flexi Coil wheel base 3700 mm.
Wheel diameter	1092 mm new, 1016 mm fully worm.
Unsprung mass per axle	4.0 T
Gear Ratio	21:107
Brake System	E-70 (Faiveley make) Computer Controlled Brake(Knorr) Bremse make.
Transformer	6531 KVA Oil Cooled Air Forced, Primary 25 KV, Secondary: Traction 1269 V, Aux. 1000V, Filter 1154 V.
Traction Convertor	2 x 3000 KVA, O/P voltage: 3 Phase 0-150Hz. 2180V, water cooled (Water mixed with ethylene glycol)
Roof Mounted AC System	Cooling Capacity: 2T (6045 K.Cah/hr) at 35°C ambient and 1.5 T (4534 K. Cal/hr) at 50°C ambient. Heating Capacity: 2KW ±5%

Tractive Effort Chart

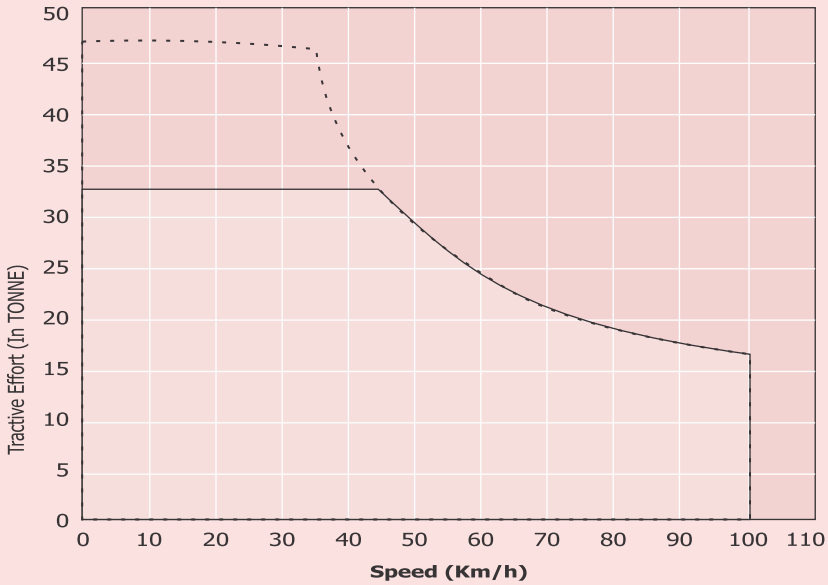

For enquiries contact:
CME (P) & Marketing, Banaras Locomotive Works, Varanasi, INDIA, 221004
Tel:0542-2270608, 9794861490 Fax-0542-2270608, Email:cmep@dlw.railnet.gov.in
Website: www.dlw.indianrailways.gov.in