


Keysight 33250A
 $R_{\text{out}} = 50 \Omega$

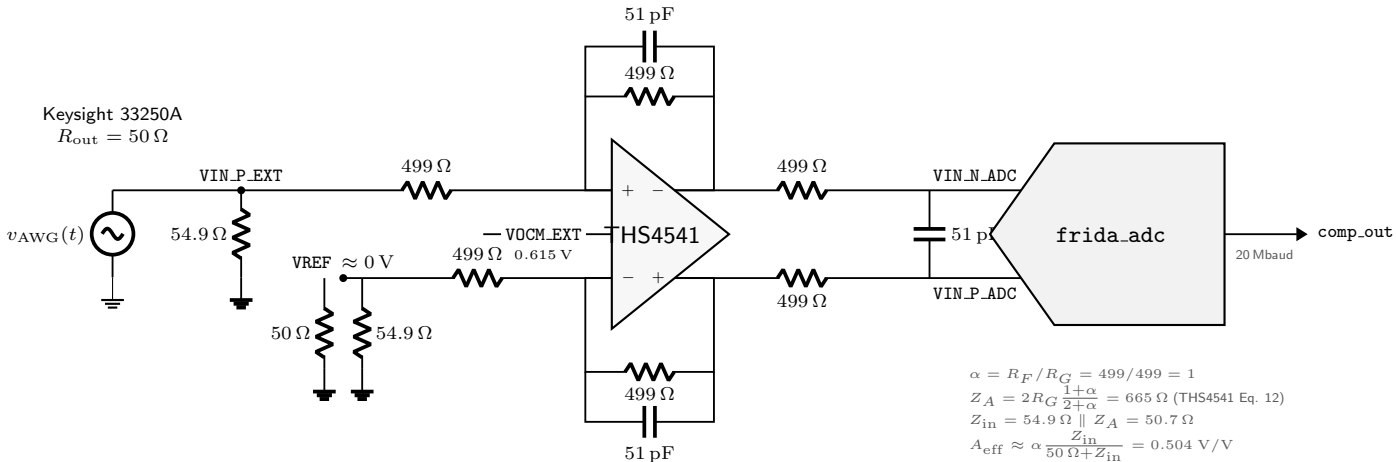

$$\alpha = R_F / R_G = 499 / 499 = 1$$

$$Z_A = 2R_G \frac{1+\alpha}{2+\alpha} = 665 \Omega \text{ (THS4541 Eq. 12)}$$

$$Z_{\text{in}} = 54.9 \Omega \parallel Z_A = 50.7 \Omega$$

$$A_{\text{eff}} \approx \alpha \frac{Z_{\text{in}}}{50 \Omega + Z_{\text{in}}} = 0.504 \text{ V/V}$$

$$H(s) \approx \frac{A_{\text{eff}}}{(1+sR_FC_F)(1+s2R_OC_O)}$$

$$f_{\text{FB}} = [2\pi R_FC_F]^{-1} = 6.25 \text{ MHz}$$

$$f_{\text{OUT}} = [2\pi(2R_O)C_O]^{-1} = 3.13 \text{ MHz}$$

$$f_{-3\text{dB}} \approx 2.62 \text{ MHz (ideal cascaded poles)}$$