

Power consumption FLEX system

All measurements made with $VCC = 5.00\text{ V}$ resolution 0.001 V .
Current measurement resolution $\pm 1\text{ mA}$.

CPU09CMI	- 131 mA	16MHz card
09FLP	- 204 mA	on FLXMIN
CPU09IDE	- 438 mA	with 74LS461 chips
CPU09RAM	- 46 mA	

GoTek	- 183 mA
SD + adaptor	- 69 mA


Working system with 20MHz CPU card and GALUx461 for the IDE 74LS461 chips
use 870 mA, vdisk 880 mA, copy SD to RAM disk ^900 mA.



Any low impedance 5V/1,5Amp adaptor will work.
I advice to use 5V/2Amp, and if you also connect a Floppy drive use a 5V/3Amp.

Watch the supply cable, the simple adaptors use very thin wires.
So at 1 Amp the voltage drop in the cable can easily rise above the 0.5 V.

The female connector of these adapters has low contact pressure and twisting the connector can also easily cause an additional 0.5 volt voltage drop across the connector.
To prevent this, cut off the connector and solder the wires to the BUS print.

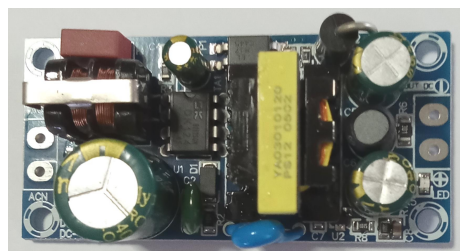

Even better use above power supply. These also have an inlet and outlet filter.