j4_display_right -- pin diagram

SeeedStudio XIAO ESP32S3, component side up, USB-C at the TOP

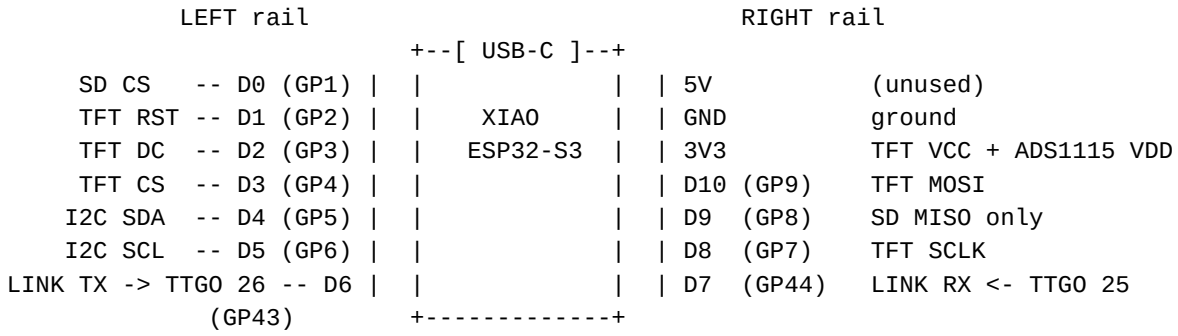

D4/D5 are the XIAO's native I2C pins -- the ADS1115 hangs there (addr 0x48).
The TTGO->XIAO direction (D7) carries face values, messages and face storage.
The microSD shares the TFT's SPI bus (D8/D9/D10) and takes only its own
chip select on D0. D9 (MISO) goes to SD_MISO ONLY: leave the display's
own MISO/SDO pin unconnected (the ILI9488 never releases it).
D0 is free for the SD chip select because the display module's LED
pin is wired to 3.3V rather than driven, so TFT_BL is not defined at all.

XIAO Pin (GPIO)	Function
3V3 (n/a)	Display VCC + ADS1115 VDD + microSD VCC (3.3V power)
GND (n/a)	Display/ADS1115 GND, shared with TTGO GND
D0 (GPIO1)	microSD chip select (card on the TFT module's own slot)
D1 (GPIO2)	TFT RST
D2 (GPIO3)	TFT DC
D3 (GPIO4)	TFT CS
D4 (GPIO5)	I2C SDA (ADS1115)
D5 (GPIO6)	I2C SCL (ADS1115)
D6 (GPIO43)	UART TX to TTGO GPIO26
D7 (GPIO44)	UART RX from TTGO GPIO25 (face values, messages, face store)
D8 (GPIO7)	TFT SCLK
D9 (GPIO8)	microSD MISO (SD_MISO only; display MISO/SDO left unconnected)
D10 (GPIO9)	TFT MOSI

j4_display_right -- ADS1115 pin diagrams

pot wiper to the A-pin; outer legs to 3.3V and GND

```
ADS1115 @ 0x48 (ADDR -> GND)               on the XIAO's own I2C bus
+------+
| VDD  |  XIAO 3V3
| GND  |  XIAO GND
| SCL  |  XIAO D5 (GPIO 6)
| SDA  |  XIAO D4 (GPIO 5)
| ADDR |  GND  = address 0x48
| ALRT |  not connected
| A0   |  IRIS pot wiper        -> 270-deg iris servo (PCA9685 on j4_receiver)
| A1   |  COLOR pot wiper       -> WS2812B strip color (j4_receiver)
| A2   |  BRIGHTNESS pot wiper  -> WS2812B strip brightness (j4_receiver)
| A3   |  VOLUME pot wiper      -> j4_talk audio volume
+------+
```