


j4_display_right -- pin diagram

SeeedStudio XIAO ESP32S3, component side up, USB-C at the TOP

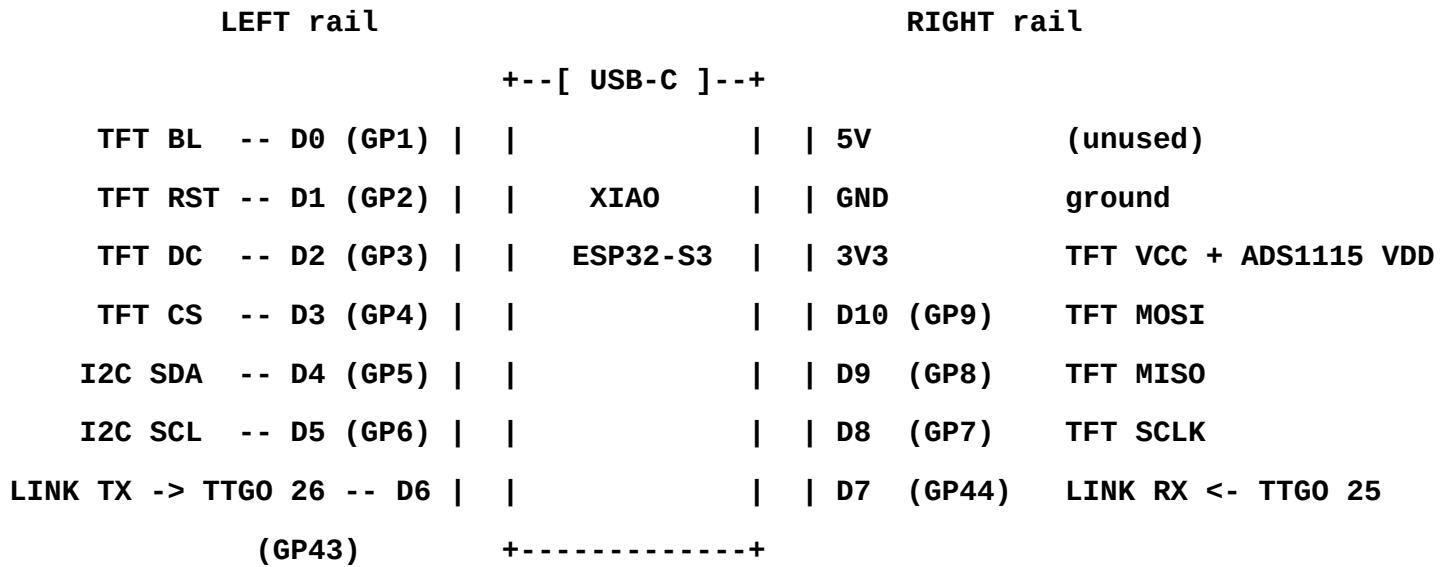

D4/D5 are the XIAO's native I2C pins -- the ADS1115 hangs there (addr 0x48).
The TTGO->XIAO direction (D7) is wired but unused; reserved for later.

Pin(s)	Function
D0 (GPIO1)	TFT backlight (HIGH = on)
D1 (GPIO2)	TFT RST
D2 (GPIO3)	TFT DC
D3 (GPIO4)	TFT CS
D4 (GPIO5)	I2C SDA (ADS1115 @ 0x48)
D5 (GPIO6)	I2C SCL (ADS1115)
D6 (GPIO43)	UART TX to TTGO GPIO26
D7 (GPIO44)	UART RX from TTGO GPIO25 (reserved)
D8 (GPIO7)	TFT SCLK
D9 (GPIO8)	TFT MISO
D10 (GPIO9)	TFT MOSI
3V3	Display VCC + ADS1115 VDD (3.3V power)
GND	Display/ADS1115 GND, shared with TTGO GND