


YACC1 memory card v2.0 - the v2.0 board (standoff option E, routed) - 1:1, component side up

J2 / adapter at the top edge (x 151.0-195.0) toward the LEDs, ROM in the memory column (top row)

Grid 10 mm, numbers = mm from the BUS-CONNECTOR edge (x, across) and from the JP1 end (y, down) - the same grid as the first fit print (its "JP2 end" = this JP1 end). Shaded = parts, dots = pads, blue = the adapter 15 mm above the card. Lay the adapter on the blue outline, component side up, header toward the bus edge: its two holes must sit on the blue crosses, its header over the blue pin grid, pin 1 at the "PIN 1 END" mark.

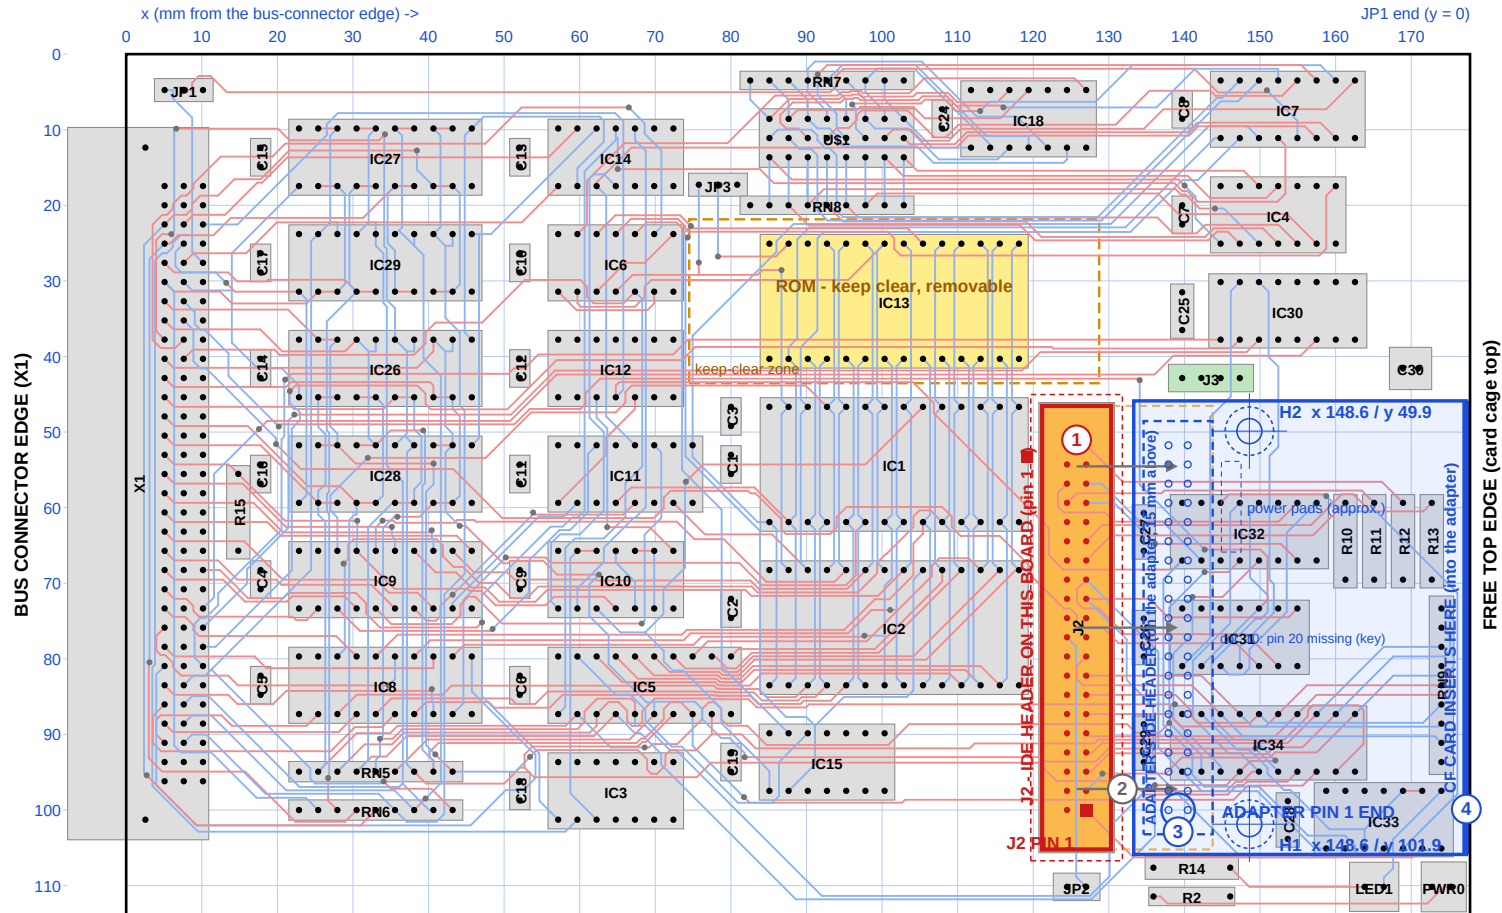

Where things land (print grid, mm)

x from the bus edge, y from the JP1 end
H1 (pin-1 end): x 148.6 y 101.9
H2 (power-pad end): x 148.6 y 49.9
holes 52.0 apart, 3.2 mm drill, 7 mm copper keep-out
adapter x 133.3-177.3, y 45.9-105.9
header edge x 133.3, CF slot edge x 177.3
J2 pin 1: x 127.0 y 100.0 (square pad)
J2 pins y 51.7-100.0, odd row x 127.0, even x 124.5
ROM IC13 keep-clear x 74.5-128.7, y 21.9-43.5
(on the board; past an edge it is free air)

Standoffs

M3 hex 15 mm female-female (5.5 AF),
M3 x 6 screws + washers both sides
adapter underside 15 mm above the card


Straight ribbon, pin 1 to pin 1

J2 pin 1 and the adapter's pin 1 at the
SAME end (y max): stripe on that end at
both plugs; the ribbon arches up from J2
and down into the adapter's header.

The routed v2.0 board

unrouted 0, vias 72, track 12808 mm
DRC copper violations: none

- ① J2 = the IDE header ON THIS BOARD (solid red, pin 1 = square pad); with its ribbon plug it stands ~18 mm; plug envelope dashed red
- ② SHORT 40-WIRE RIBBON, pin 1 to pin 1 (~5-8 cm between the plugs): the grey arrows, J2 -> the adapter's header
- ③ ADAPTER'S IDE HEADER (dashed blue): on the HX-2118P adapter, 15 mm above on standoffs H1 / H2 - the adapter does NOT plug into J2
- ④ CF CARD INSERTS HERE (into the adapter): the thick blue slot edge; the card is pushed in toward the bus




CHECK: this bar must measure exactly 100 mm - print at 100 % / "Actual size", NOT "Fit" / "Shrink to page"

Also check with a ruler: the two blue hole crosses are 52.0 mm apart.

Side view at 1:1 - the height stack (section along x, seen from the y-max end; card component side up)

Heights are typical figures, not measured: box header 9, IDC plug on it +9 (~18), plug body ~1.5 wider than the shroud each side, socketed DIP 8.5-9.5, adapter 1.6 thick, CF holder + card ~6-8 on the adapter.

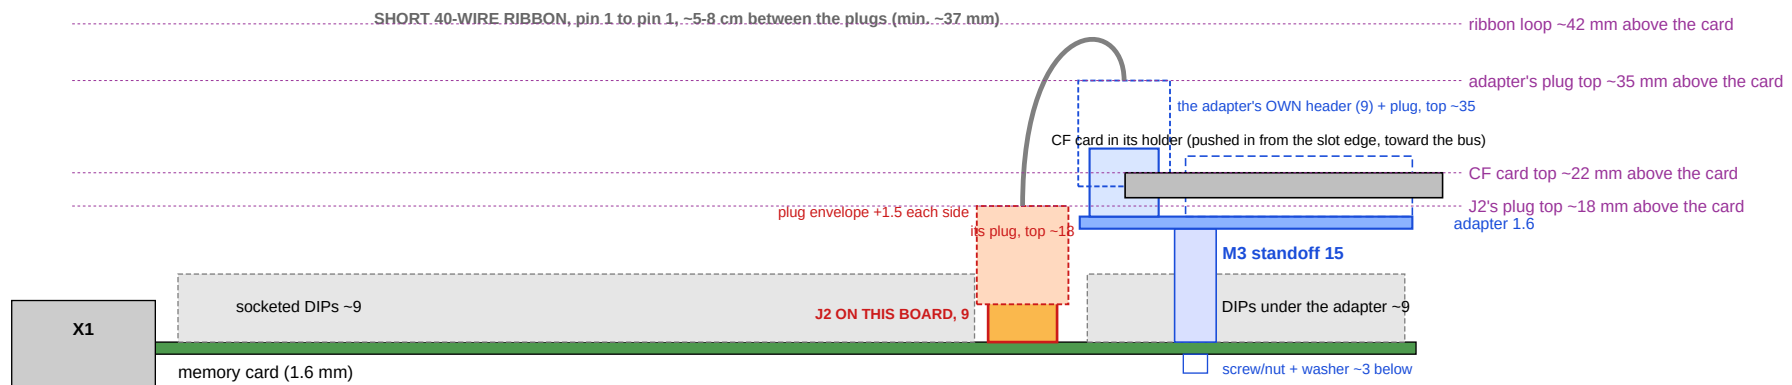

J2 is the IDE header ON THIS BOARD. The CF adapter does NOT plug into it: the adapter sits on two 15 mm M3 standoffs and has its OWN IDE header; a short 40-wire ribbon (~5-8 cm) joins the two, pin 1 to pin 1.


Standoffs: 15 mm M3 hex female-female (5.5 mm across flats) + M3 x 6 screws and washers (or 15 mm male-female with a nut under the card); 15 mm keeps ~3.5 mm between socketed DIPs (~9 mm) and the adapter's pin tails (~2-2.5 mm under it). J2 with its plug stands ~18 mm, taller than the standoffs: its plug envelope stays outside the adapter outline.

Total height above the card: CF card ~22 mm, the plug on the adapter's header ~35 mm, the ribbon loop ~42 mm; below the card: screw heads / nuts ~3 mm.

Card cage: the slot on this card's component side stays EMPTY (2026-09-25: nothing in front of the memory card), so the ~44 mm stack has the room it needs.

Pin 20: the adapter has no pin 20 (key). J2 has it fitted: use a ribbon whose plugs have pin 20 OPEN, or pull J2's pin 20. JP2 (pin 20 = +5 V) stays OPEN.

Power: the adapter takes +5 V through its power pads (floppy order +5V, G, G, +12V) by a short straight-through cable from J3 (+5V, G, G, nc): pin 1 to pin 1, so +12 V meets J3's open pin (2026-09-26).



CHECK: this bar must measure exactly 100 mm - print at 100 % / "Actual size", NOT "Fit" / "Shrink to page"