


J2 / adapter at the top edge (x 151.0-195.0), ROM in the memory column (bottom row) with the RAMs


x (mm from the bus-connector edge) -> JP1 end (y = 0)



- 2026-10-02 21:15

Side view at 1:1 - the height stack (section along x, seen from the y-max end; card component side up)

Heights are typical figures, not measured: box header 9, IDC plug on it +9 (~18), plug body ~1.5 wider than the shroud each side, socketed DIP 8.5-9.5, adapter 1.6 thick, CF holder + card ~6-8 on the adapter.

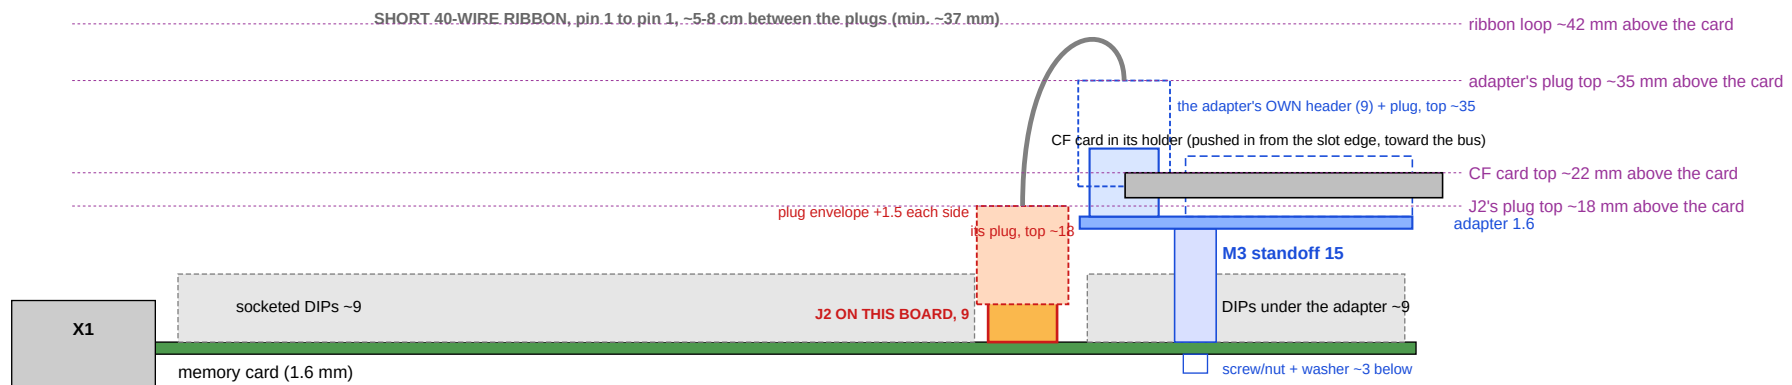

J2 is the IDE header ON THIS BOARD. The CF adapter does NOT plug into it: the adapter sits on two 15 mm M3 standoffs and has its OWN IDE header; a short 40-wire ribbon (~5-8 cm) joins the two, pin 1 to pin 1.


Standoffs: 15 mm M3 hex female-female (5.5 mm across flats) + M3 x 6 screws and washers (or 15 mm male-female with a nut under the card); 15 mm keeps ~3.5 mm between socketed DIPs (~9 mm) and the adapter's pin tails (~2-2.5 mm under it). J2 with its plug stands ~18 mm, taller than the standoffs: its plug envelope stays outside the adapter outline.

Total height above the card: CF card ~22 mm, the plug on the adapter's header ~35 mm, the ribbon loop ~42 mm; below the card: screw heads / nuts ~3 mm.

Card cage: the slot on this card's component side stays EMPTY (2026-09-25: nothing in front of the memory card), so the ~44 mm stack has the room it needs.

Pin 20: the adapter has no pin 20 (key). J2 has it fitted: use a ribbon whose plugs have pin 20 OPEN, or pull J2's pin 20. JP2 (pin 20 = +5 V) stays OPEN.

Power: the adapter takes +5 V through its power pads (floppy order +5V, G, G, +12V) by a short straight-through cable from J3 (+5V, G, G, nc): pin 1 to pin 1, so +12 V meets J3's open pin (2026-09-26).



CHECK: this bar must measure exactly 100 mm - print at 100 % / "Actual size", NOT "Fit" / "Shrink to page"