


!!NOTE!!

- (1) The differential signals on both TX/RX should have equal length and be close to each other, if possible.
- (2) When MOD[2] is HIGH then W5100S operates with BUS mode. If LOW, W5100S operates in SPI mode.
- (3) Decoupling capacitors should be placed close to W5100S.
- (4) To avoid the 100M overshoot, please place the 49.9 resistors and 0.1uF capacitor near the MDI pin of W5100S.
- (5) RSET_BG is the most important analog pin and users should keep the noisy source away from this pin.
- (6) Option - Apply damping resistors for EMI reduction.
- (7) As close to RJ45 2,5 pin as possible

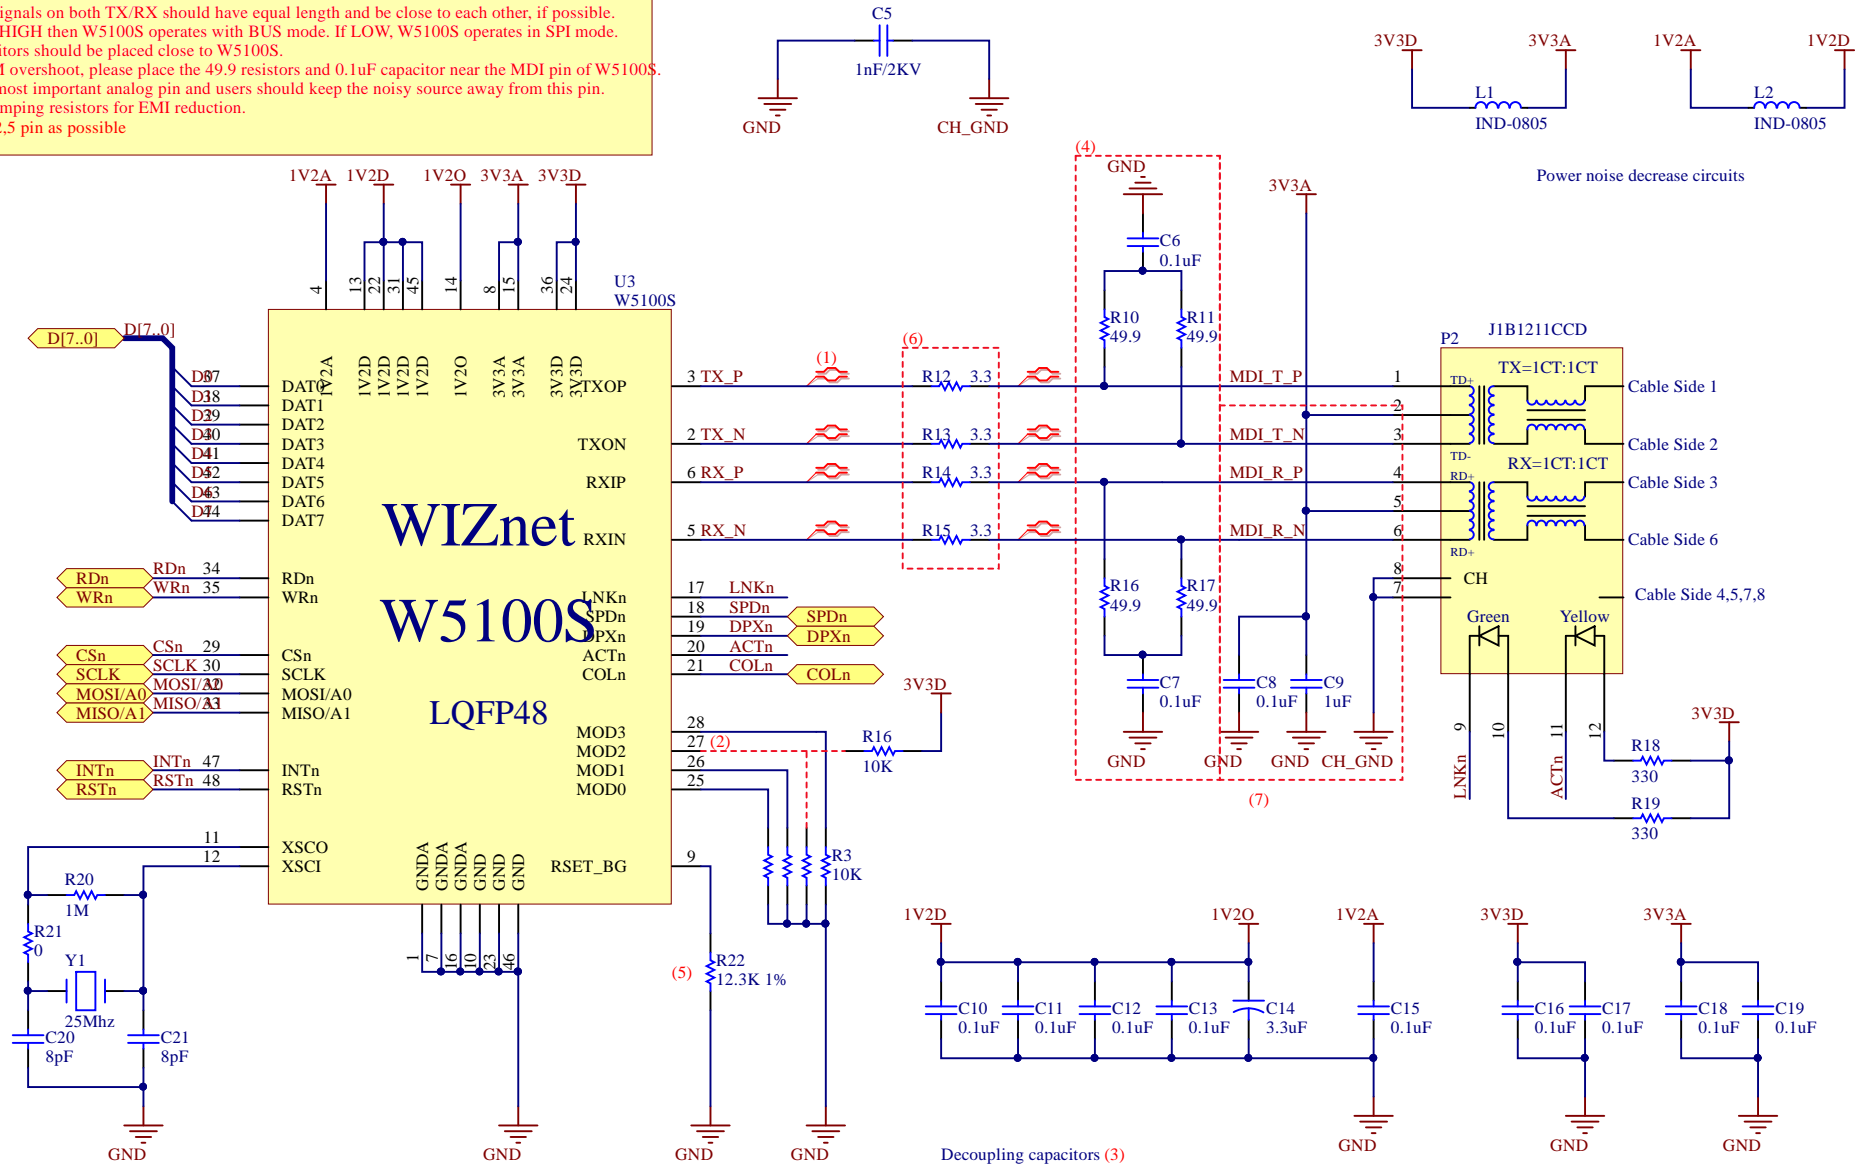

Title **W5100S Reference Schematic**

Size: **A4**

Number:

Revision: **R1**

Date: 2018-05-04

Sheet 1 of 1

Team: CS

Drawn By: *

WIZnet Co., Ltd.
5F, Humax Village
Hwangseaul-ro, Bundang-gu
Seongnam-si, Gyeonggi-do
South Korea

