Door lock switch, passenger side (14028)

Schematic

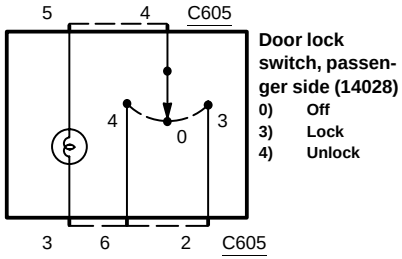

Terminals



Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Lock Switch Circuit	4 and 2	Lock	Closed circuit
		Unlock	Open circuit
		Off	
Unlock Switch Circuit	4 and 6	Lock	Open circuit
		Unlock	Closed circuit
		Off	Open circuit