Main light switch

Schematic

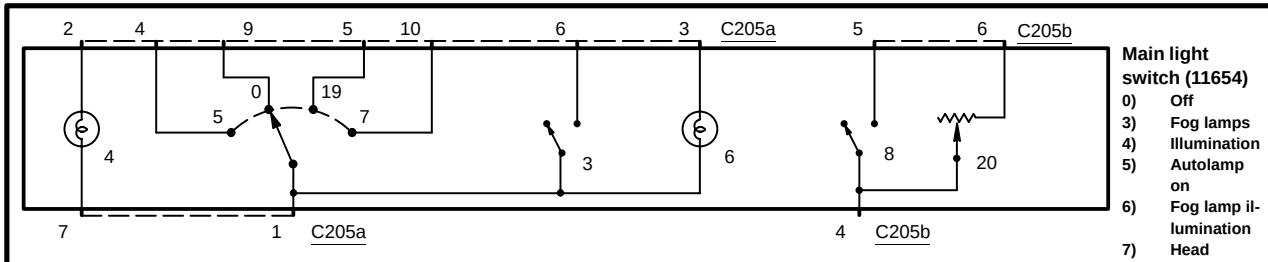

Main light switch (11654)

- **0)** Off
- **3)** Fog lamps
- **4)** Illumination
- **5)** Autolamp on
- **6)** Fog lamp illumination
- **7)** Head
- **8)** Interior
- **19)** Parking lamps
- **20)** Dimmer

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Autolamp Circuit	4 and 1, C205a	Autolamps	Closed circuit
		Off	Open circuit
		Parking Lamps	
		Headlamps	
Parking lights circuit	5 and 1, C205a	Autolamps	Open circuit
		Off	
		Parking Lamps	Closed circuit
		Headlamps	Open circuit
Headlamp circuit	10 and 1	Autolamps	Open circuit
		Off	
		Parking Lamps	
		Headlamps	Closed circuit
Fog lamps Circuit	6 and 1, C205a	Fog lamps	Closed circuit
		Off	Open circuit
Interior lamps Circuit	5 and 4, C205b	Interior lamps	Closed circuit
		Off	Open circuit
Illumination dimmer resistor	6 and 4, C205b	Rotate knob clockwise	Ohmmeter will show smoothly increasing resistance

Terminals

C205a



F10063

C205b



F06128