C2041a

11401

A208
Restraints control
module (14B321)

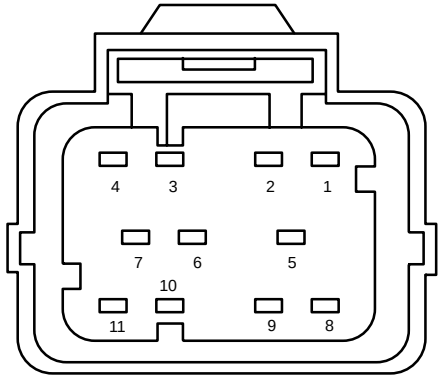

F11019

Pin	Circuit	Circuit function
1	609 (OG/YE)	Voltage supplied at all times (overload protected)
2	614 (GY/OG)	Driver air bag, feed, monitor
3	615 (GY/WH)	Driver air bag, return
4	70 (LB/WH)	ISO Bus
5	607 (LB/OG)	Passenger air bag, feed, monitor
6	616 (PK/BK)	Passenger air bag, return
7	1205 (BK)	Ground
8	–	not used
9	608 (BK/YE)	Air bag indicator, control
10	649 (BK/OG)	Air bag, dedicated ground
11	1083 (LB/BK)	Air bag, tone driver