Schematic

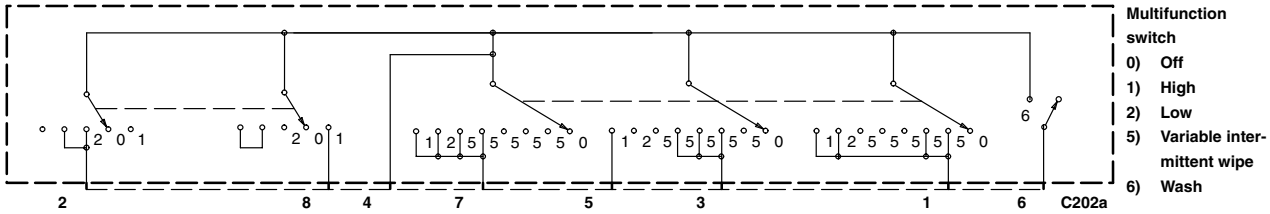

Terminals

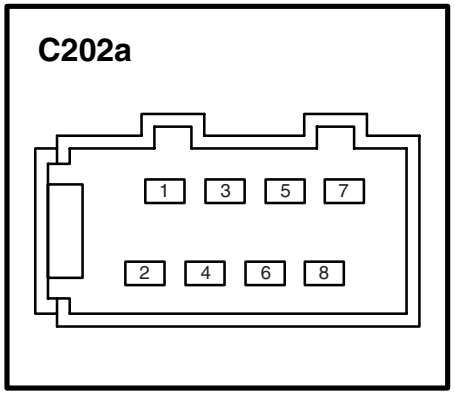

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Wiper switch circuit (rear wiper)	4 and 2	Off	Open circuit
	4 and 8		Open circuit
	4 and 2	Low	Closed circuit
	4 and 8		Open circuit
	4 and 2	High	Open circuit
	4 and 8		Closed circuit
Intermittent wiper circuit	4 and 7	Detent 1	Open circuit
	4 and 3		Open circuit
	4 and 1		Closed circuit
	4 and 7	Detent 2	Open circuit
	4 and 3		Closed circuit
	4 and 1		Closed circuit
	4 and 7	Detent 3	Open circuit
	4 and 3		Closed circuit
	4 and 1		Open circuit
	4 and 7	Detent 4	Closed circuit
	4 and 3		Closed circuit
	4 and 1		Open circuit
	4 and 7	Detent 5	Closed circuit
	4 and 3		Open circuit
	4 and 1		Open circuit