## Multifunction Switch, Wiper/Washer Portion

### Schematic

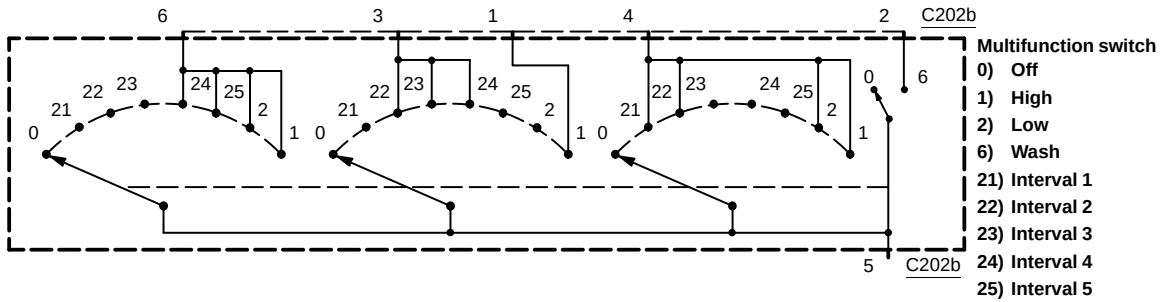


### Terminals




### Component testing procedure

| Circuit to test | Connect self–powered test light or ohmmeter to terminals | Move switch to these positions | A good switch will indicate |
|---|---|---|---|
| **Washer switch circuit** | 2 and 5 | Washer switch de-pressed | Closed circuit |
| **Wiper switch circuit** | 6 and 5 | Off | Open circuit |
| | | High | Closed circuit |
| | | Low | Closed circuit |
| | 1 and 5 | Off | Open circuit |
| | | High | Closed circuit |
| | | Low | Open circuit |
| | 4 and 5 | Off | Open circuit |
| | | High | Closed circuit |
| | | Low | Closed circuit |
| **Intermittent wiper circuit** | 6 and 5 | Intermittent 1 | Open circuit |
| | | Intermittent 2 | Open circuit |
| | | Intermittent 3 | Open circuit |
| | | Intermittent 4 | Closed circuit |
| | | Intermittent 5 | Closed circuit |
| | 3 and 5 | Intermittent 1 | Open circuit |
| | | Intermittent 2 | Closed circuit |
| | | Intermittent 3 | Closed circuit |
| | | Intermittent 4 | Closed circuit |
| | | Intermittent 5 | Open circuit |
| | 4 and 5 | Intermittent 1 | Closed circuit |
| | | Intermittent 2 | Closed circuit |
| | | Intermittent 3 | Open circuit |
| | | Intermittent 4 | Open circuit |
| | | Intermittent 5 | Open circuit |