Exterior rear view mirror switch (17B676)

Schematic

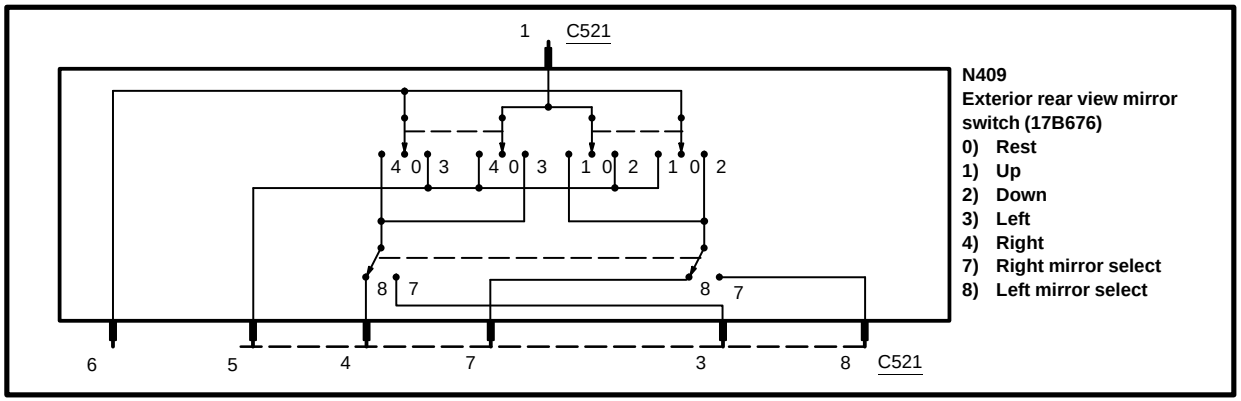

Terminals

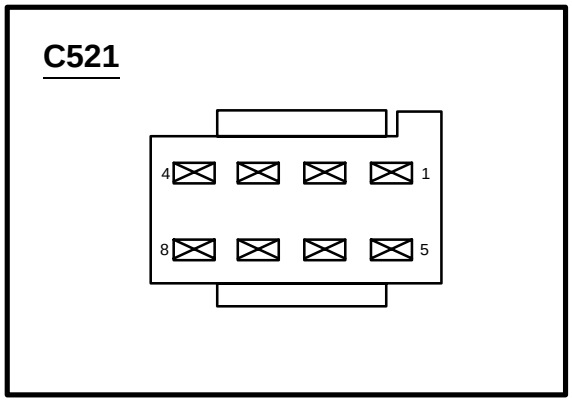

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Left mirror		**Selector switch Left**	
Up	1 and 7 5 and 6	Up	Closed circuit
Down	1 and 5 7 and 6	Down	Closed circuit
Left	1 and 4 5 and 6	Left	Closed circuit
Right	1 and 5 4 and 6	Right	Closed circuit
Right mirror		**Selector switch Right**	
Up	1 and 8 5 and 6	Up	Closed circuit
Down	1 and 5 8 and 6	Down	Closed circuit
Left	1 and 3 5 and 6	Left	Closed circuit
Right	1 and 5 3 and 6	Right	Closed circuit