C1017c

K22
Starter relay (11450)



F01014

Pin	Circuit	Circuit function
1	32 (RD/LB)	Voltage supplied in Start (overload protected)

C1018

12A581

V34
PCM power diode



F02009

Pin	Circuit	Circuit function
1	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
2	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)

C1019

14305

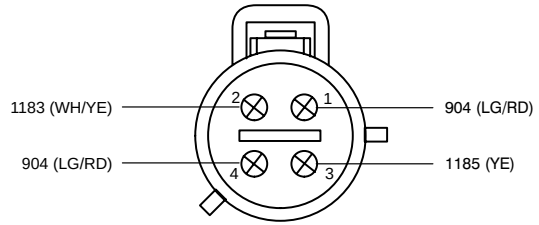

F04263

12A581

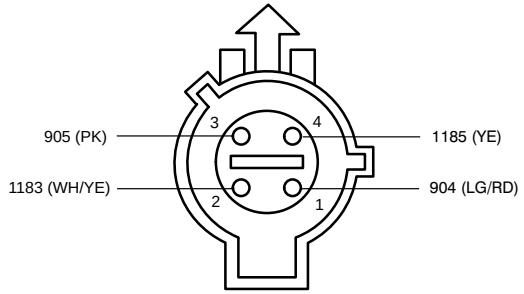

F04251

C1021

14290

E1
Headlamp, left
(13008)



F03263

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	12 (LG/BK)	Power, Hot with High Beams on
3	13 (RD/BK)	Power, Hot with Low Beams on