Component Testing – Illumination dimmer

SCHEMATIC

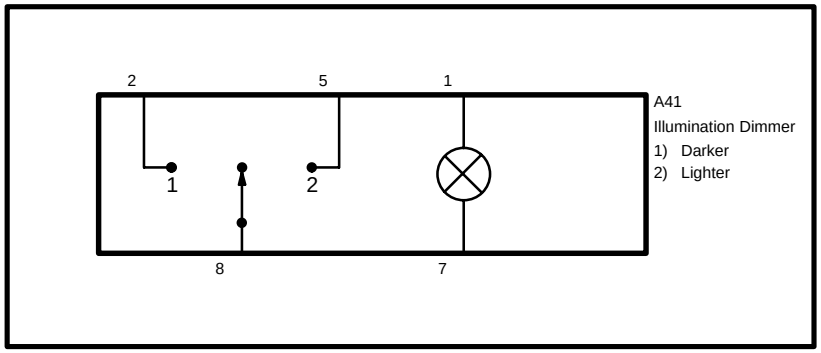

TERMINAL LOCATIONS

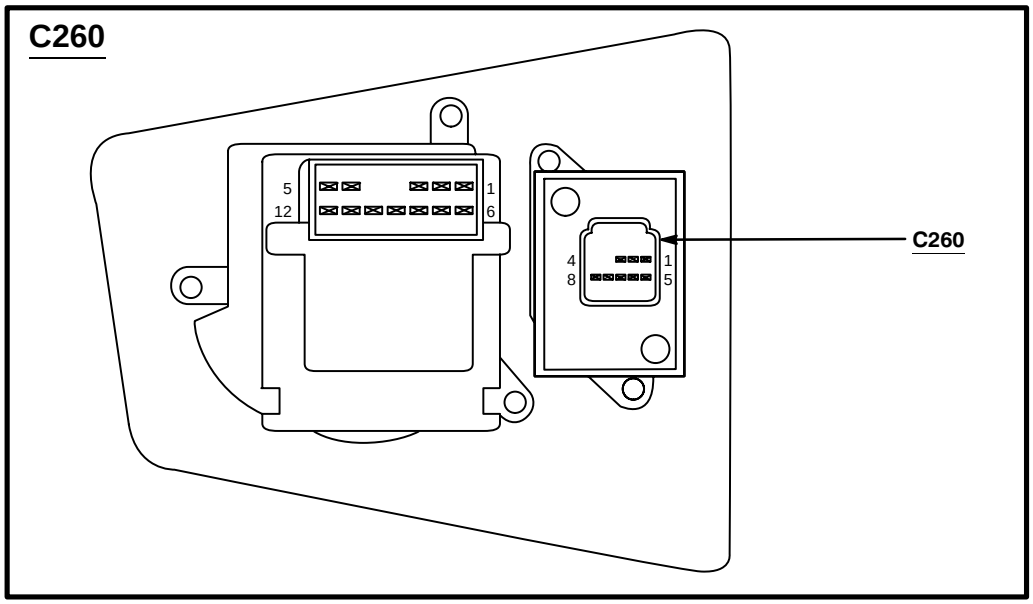

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Illumination Darker	2 and 8	Darker	Closed Circuit
Illumination Lighter	5 and 8	Lighter	Closed Circuit
Switch Illumination Bulb	1 and 7	All Positions	Continuity