# Multifunction Switch, Lamp Portion

## Schematic

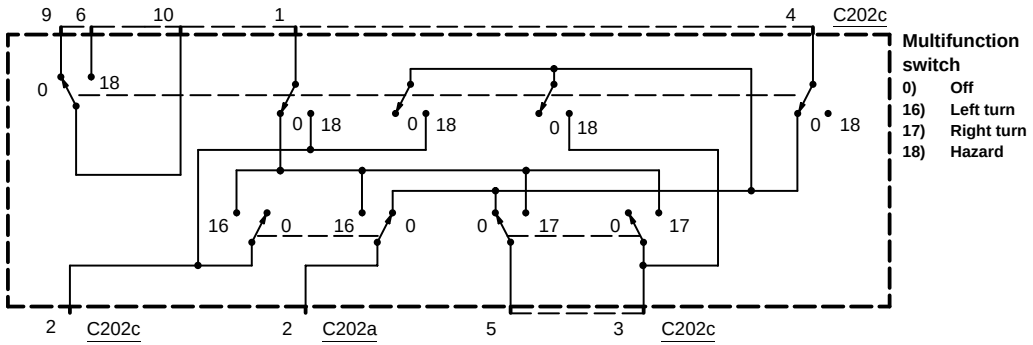


## Component testing procedure

| Circuit to test | Connect self–powered test light or ohmmeter to terminals | Move switch to these positions | A good switch will indicate |
|---|---|---|---|
| **Turn signal** | 1, C202c and 2, C202c | Left turn, Hazard Off | Closed circuit |
| | 1, C202c and 2, C202a | | |
| | 4, C202c and 5, C202c | | |
| | 4, C202c and 2, C202a | Right turn, Hazard Off | Closed circuit |
| | 1, C202c and 5, C202c | | |
| | 1, C202c and 3, C202c | | |
| **Hazard** | 6, C202c and 10, C202c | Hazard On, Turn signal switch in neutral | Closed circuit |
| | 1, C202c and 2, C202c | | |
| | 1, C202c and 2, C202a | | |
| | 1, C202c and 5, C202c | | |
| | 1, C202c and 3, C202c | | |
| **Stoplamps** | 9, C202c and 10, C202c | Hazard Off, Turn signal switch in neutral | Closed circuit |
| | 4, C202c and 2, C202a | | |
| | 4, C202c and 5, C202c | | |

## Terminals

### C202c

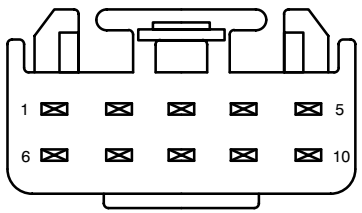


F10042

### C202a

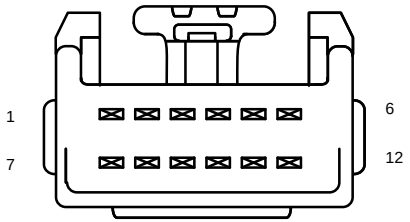


F12075