# Power seat switch, left

## Schematic

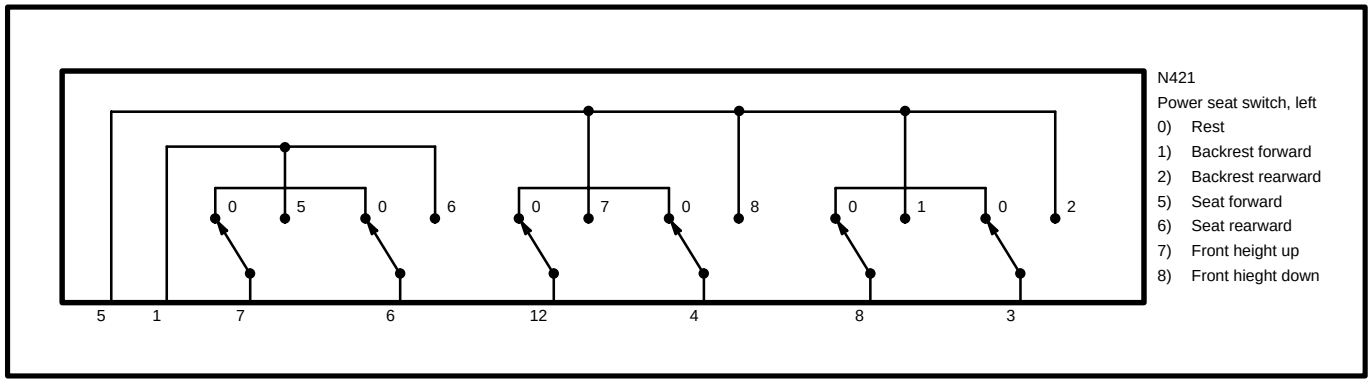


## Component testing procedure

| Circuit to test | Connect self–powered test light or ohmmeter to terminals | Move switch to these positions | A good switch will indicate |
|---|---|---|---|
| **Backrest circuit** | 5 and 8 | Rest | Open circuit |
| | | Backrest forward | Closed circuit |
| | 5 and 3 | Rest | Open circuit |
| | | Backrest rearward | Closed circuit |
| **Forward/Rearward circuit** | 1 and 7 | Rest | Open circuit |
| | | Seat Forward | Closed circuit |
| | 1 and 6 | Rest | Open circuit |
| | | Seat rearward | Closed circuit |
| **Height circuit** | 5 and 12 | Rest | Open circuit |
| | | Front Height Up | Closed circuit |
| | 5 and 4 | Rest | Open circuit |
| | | Front Height Down | Closed circuit |
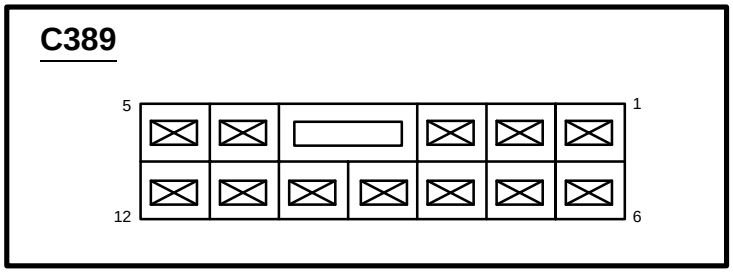
## Terminal locations