Master window/door lock/unlock switch (continued)

Terminals

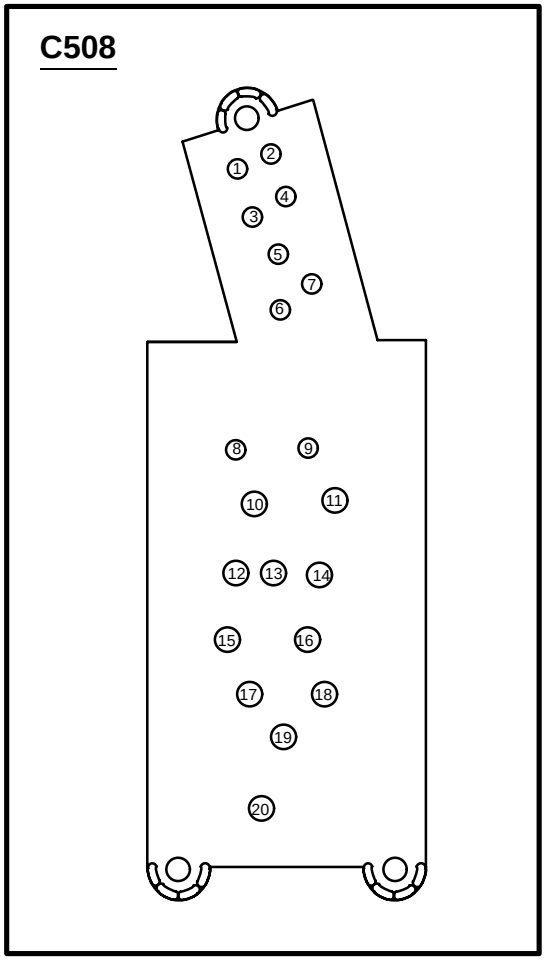

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power and Ground Checks Before Any Other Tests	19 and 13	All switches	Open circuit
	13 and all others except 20	All switches at rest	Closed circuit
Left front window circuit	19 and 8	Up	Closed circuit
	19 and 10	Down	Closed circuit
Right front window circuit	19 and 9	Up	Closed circuit
	19 and 11	Down	Closed circuit
Left rear window circuit	19 and 17	Up	Closed circuit
	19 and 4	Down	Closed circuit
Right rear window circuit	19 and 18	Up	Closed circuit
	19 and 16	Down	Closed circuit