Door lock switch, driver side (14028)

Schematic

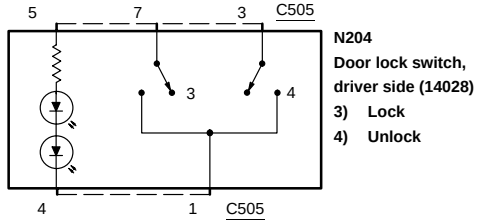

N204
Door lock switch, driver side (14028)
3) Lock
4) Unlock

Terminals

C505



F08359

Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Door lock switch	7 and 1	Lock	Closed circuit
		Unlock	Open circuit
		Neutral	Open circuit
	3 and 1	Lock	Open circuit
		Unlock	Closed circuit
		Neutral	Open circuit