C390

14588

A446
Docking station

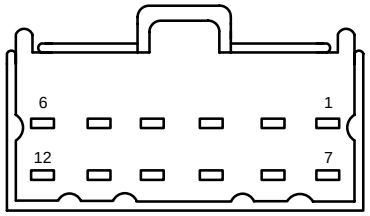

F12019

Pin	Circuit	Circuit function
1	724 (LB/YE)	Radio (18806), to cellular phone, audio –
2	694 (BK/LG)	Ground
3	720 (RD/YE)	Voltage supplied at all times (overload protected)
4	–	not used
5	715 (LG)	Microphone, audio –
6	–	not used
7	725 (PK)	Radio (18806), to cellular phone, audio +
8	723 (GY/RD)	Cellular phone, mute
9	–	not used
10	194 (PK)	Voltage in Run or Accessory (overload protected)
11	714 (VT)	Microphone, audio +
12	–	not used

C391

14A005

E241
Sliding door entry
lamp, right



F02207

Pin	Circuit	Circuit function
1	1334 (OG/WH)	puddle lamp, control
2	1458 (VT/WH)	Fused battery feed, SSP 4 relay, to, right rear, Lamp

C392

14A005

N316
Inertia Fuel Shutoff
(IFS) switch
(9D362)



F03072

Pin	Circuit	Circuit function
1	787 (PK/BK)	Fuel pump, Power
2	238 (DG/YE)	Fuel pump relay, switched power, output
3	–	not used

C395

14A005

Y17
Speaker, left rear
(18808)



F02069

Pin	Circuit	Circuit function
1	800 (GY/LB)	Speaker, left rear (18808) +
2	801 (TN/YE)	Speaker, left rear (18808) –

C397

14A005

N429
Sliding door ajar
switch, left



F02281

Pin	Circuit	Circuit function
1	1432 (WH/VT)	Sliding door ajar switch, left, signal
2	1205 (BK)	Ground