C395

14A488

Y17
Speaker, left rear



F02069

Pin	Circuit	Circuit Function
1	800 (GY/LB)	Speaker, left rear +
2	801 (TN/YE)	Speaker, left rear -

C396

14A488

Y19
Speaker, right rear



F02069

Pin	Circuit	Circuit Function
1	802 (OG/RD)	Speaker, right rear +
2	803 (BN/PK)	Speaker, right rear –

C402a

18C673

R19
Rear window defrost grid


F01029

Pin	Circuit	Circuit Function
1	185 (BK)	Voltage supplied at all times (overload protected)

C402b

18C620

R19
Rear window defrost grid


F01029

Pin	Circuit	Circuit Function
1	57 (BK)	Ground

C406 (GY)

14A583



F03183

13B472



F03078

C408 (GY)

14A583

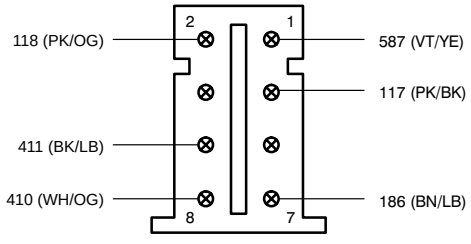

F08058

13B472

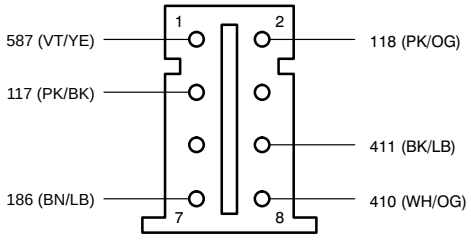

F08058